







Guide rail with keying/coding, groove width 2.5 mm

Catalog Number: 24561-331

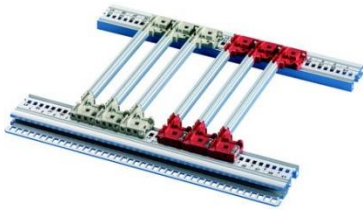

Other Views



- Optional keying/coding pegs to prevent boards being inserted into the wrong slot position
- The optional ESD clip for IEEE alignment pins can be fitted into guide rails with keying/coding and into the keying/coding block. It ensures conductive contact between the alignment pin of the insertion/extraction handle (IEL or IET handle) and the horizontal rail
- Guide rail, plastic, one-piece, red, for 2 mm groove width
- Assembly Can be clipped into horizontal rails in Al extrusion Can be clipped into 1.5 mm thick plate
- The optional ESD clip ensures conductive contact between PCB and horizontal rail, on both the solder side and the component side.
- With keying/coding block
- Storage temperature: from -40 °C ... 130 °C

Product family:

- EuropacPRO
- RatiopacPRO

Type:

Individual Components

Individual Component Type:

Guide Rails & Accessories

Description:

For CompactPCI, VME64x with coding

Technical Data

Qty	PU 10 pieces
Color	red/silver
Board length [mm]	280.0
Groove width	2.5
Material	End foot: (1) PBT, UL 94 V-0, middle section: (2) aluminium profile, anodised
Description	For CompactPCI, VME64x with coding