


PCB Mount Solid State Relay

Single Phase DC Output



**RoHS
Compliant**



Description

This is DC solid state relay with high EMC and high inrush current capability, it is widely used in all kinds of DC motor, DC power supply and electromagnetic devices. The control voltage is 5V DC, and 12V DC, opto-isolation between input and output, dielectric strength $\geq 2500\text{VACrms}$.

Features

- Opto-isolation
- Load Current: 0.02 - 4A @ 60V DC
- Control Voltage: 5V DC, 12V DC
- Dielectric Strength: $\geq 2500\text{VACrms}$
- Suitable for The High Density PCB Installation

Application

Applicable to the isolation and control of weak current to high voltage, as well as the transformation of electricity, convenient to all kinds of computers and digital interface circuit connection, widely used in all kinds of DC motor, DC power supply and electromagnetic devices.

Technical Specification

Input Circuit		
Control Voltage Range	5V DC	4-6V DC
	12V DC	9.6-14.4V DC
Minimum Turn-on Voltage	5V DC	4V DC
	12V DC	9.6V DC
Minimum Turn-off Voltage		1V DC
Maximum Input Current		25mA
Output Circuit		
Load Voltage Range		3-60V DC
Transient Over Voltage		66Vpk
Load Current Range	1A	0.02~1A
	4A	0.02~4A
Maximum Surge Current [@10 ms]	1A	4A
	4A	20A
Maximum On-state Voltage Drop [@ Rated Current]		0.5V
Maximum Turn-on Time		1ms
Maximum Turn-off Time		1ms
Maximum Off-state Leakage Current [@ Rated Voltage]		0.1mA

PCB Mount Solid State Relay


Single Phase DC Output



General Information	
Dielectric Strength, Input/Output[50/60Hz]	≥2500Vrms
Insulated Resistance	1000MΩ (@500VDC)
Ambient Operating Temperature Range	-30°C ~ +80°C
Ambient Storage Temperature Range	-30°C ~ +100°C
Weight [Typical]	3g



Installation Drawing

T Type Footprint

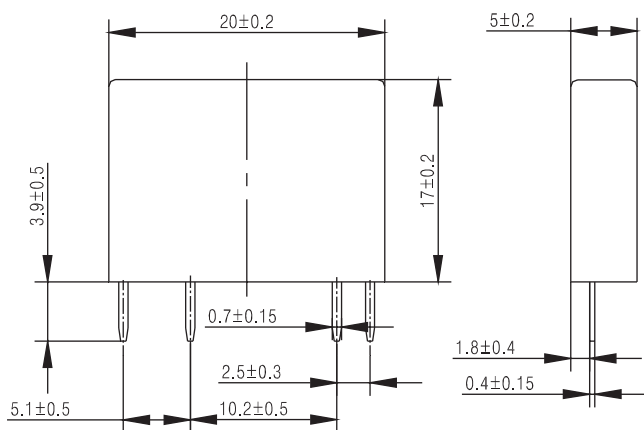

Dimensions : Millimetres

Thermal Curve

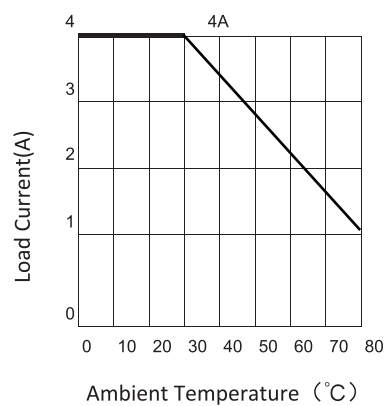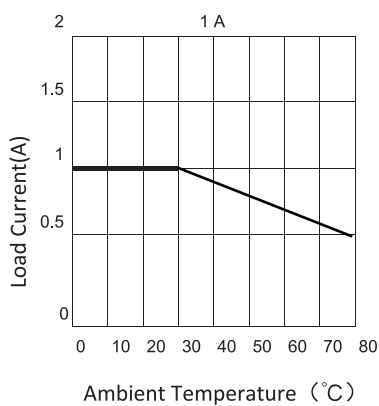

PCB Mount Solid State Relay

Single Phase DC Output



Part Number Table

Description	Part Number
SSR, PCB Mount, 1A, 3-60V DC, 5V DC, T Footprint	MC002241
SSR, PCB Mount, 4A, 3-60V DC, 12V DC, T Footprint	MC002242

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell Limited 2016.