

3.5mm Earphone Audio Connector PCB Mount

pro-SIGNAL



Specifications

Electrical Data

Contact Resistance	: 30mΩ max.
Withstanding Voltage	: 500V AC for one minute
Insulation Resistance	: 100MΩ min.at 500V DC

Material

Housing / Body	: PA66 (Body)
Flammability	: UL94HB
Contact	: Phosphor bronze (Sleeve spring, Ring spring #2, Ring spring #3, Chip spring)
Plating	: Ag



Mechanical Data

Mating Cycles	: 5,000 (gauge plug)
Insertion Force	: 5.88 to 24.52N (initial value), 2.94 to 19.62N (after insertion and extraction)
Extraction Force	: 5.88 to 24.52N (initial value), 2.94 to 19.62N (after insertion and extraction)

Environmental

Temperature Range	: -20°C to +70°C
-------------------	------------------

Diagram

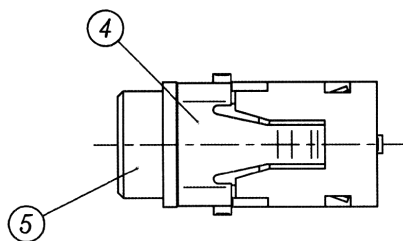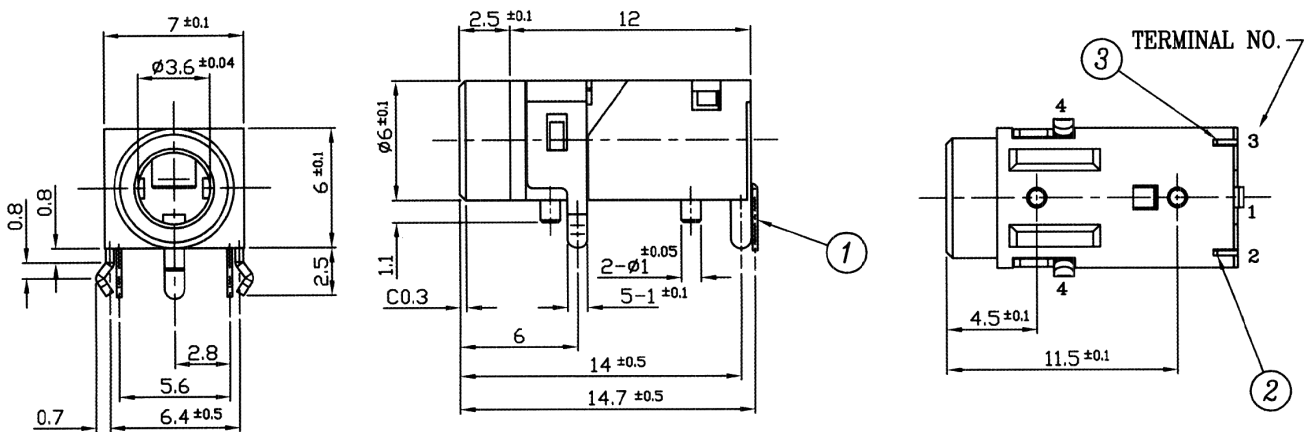

No.	Part Name	Material	Remark	Qty.
1	Sleeve Spring	PBs 0.25t	Ag-Plated	1
2	Ring Spring #2	PBs 0.25t	Ag-Plated	
3	Ring Spring #3	PBs 0.25t	Ag-Plated	
4	Chip Spring	PBs 0.4t	Ag-Plated	
5	Body	PA66/CF Resin	Black	



Dimensions : Millimetres

www.element14.com
www.farnell.com
www.newark.com
www.cpc.co.uk

pro-SIGNAL

3.5mm Earphone Audio Connector PCB Mount

pro-SIGNAL

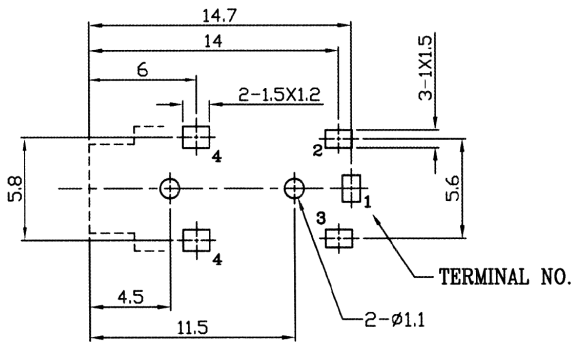

Dimensions : Millimetres

Part Number Table

Description	Part Number
3.5mm Earphone Audio Connector, PCB Mount	MJ-2135

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-SIGNAL is the registered trademark of the Group. © Premier Farnell Limited 2016.

www.element14.com
www.farnell.com
www.newark.com
www.cpc.co.uk

pro-SIGNAL