


Triple Channel Linear DC Power Supply **TENMA™**

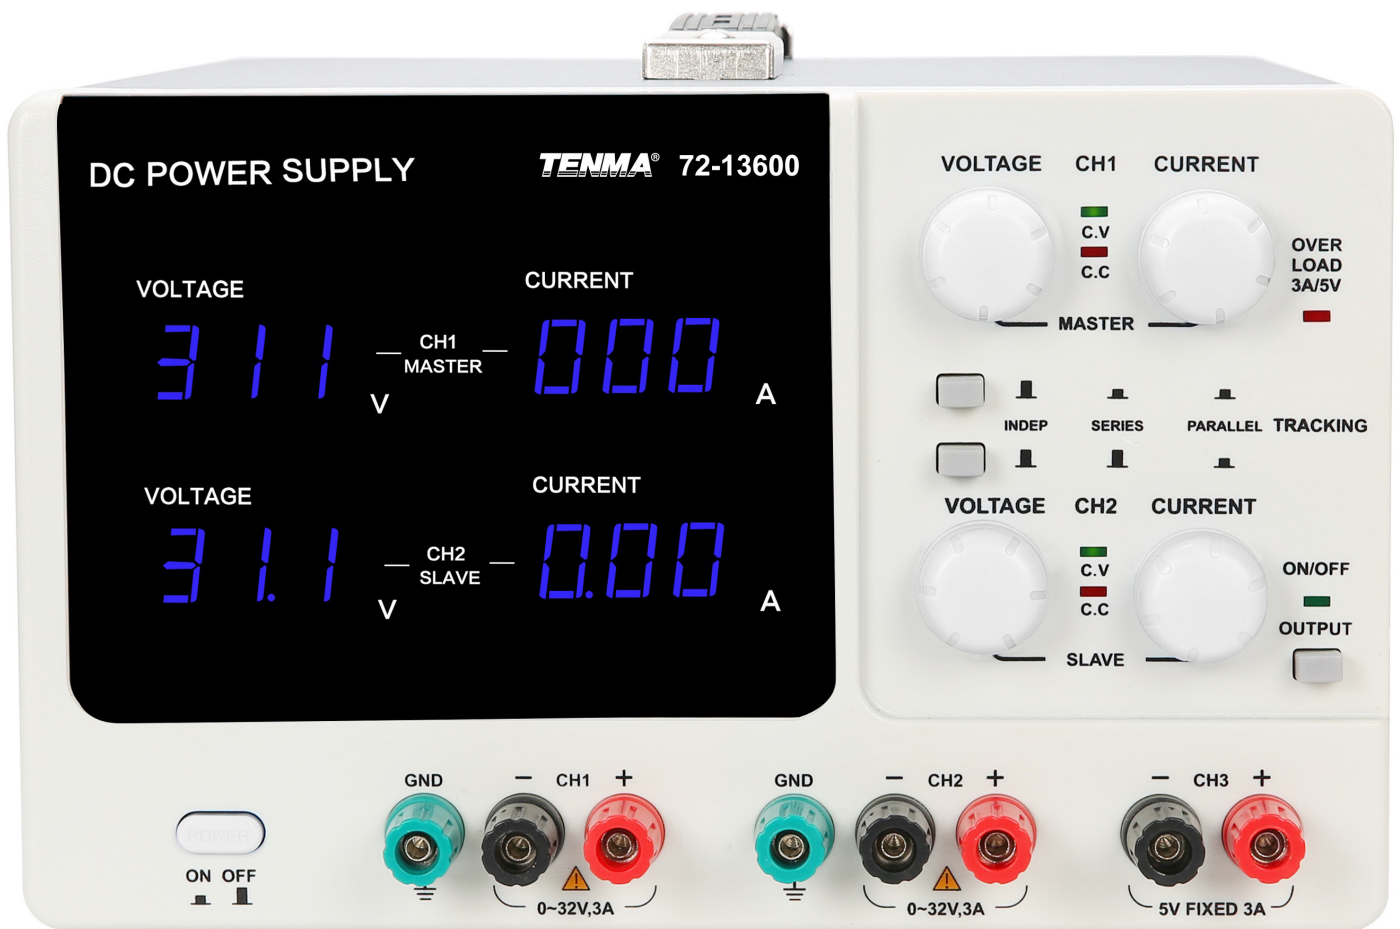

Features:

- Dual Channel Adjustable & One Channel Fixed
- Master-Slave Tracking
- Constant Current & Constant Voltage Operation
- Forced Ventilation & Temperature Cooling System
- LED Digital Tube Display; Shows Voltage & Current Simultaneously
- Low Ripple & Low Noise
- High Regulation: 0.01%
- Output ON/OFF Control
- Overload & Reverse Polarity Protection

Electrical Specifications:

Performance	72-13600		
	CH1	CH2	CH3
Output Voltage	0 - 32V		5V
Output Current	0 - 3A		3A

Triple Channel Linear DC Power Supply



Performance		72-13600	
Series Tracking		0 - 64V	-
Parallel Tracking		0 - 6A	-
Load Regulation	Voltage	$\leq 0.01\% +3mV$	$\leq 3\% +5mV$
	Current	$\leq 0.2\% +3mA$	-
Line Regulation	Voltage	$\leq 0.01\% +3mV$	5mV
	Current	$\leq 0.1\% +3mA$	-
Ripple and Noise	Voltage	1m Vrms	2mVrms
	Current	3m Arms	-
Display Accuracy		$\leq \pm 1\%$ rdg +2 digits	
Working Temperature		0°C to 40°C	
Reliability (MTBF)		≥ 2000 Hours	

General Characteristics:

AC Input Voltage	: 115VAC/230VAC; 50Hz/60Hz
Colour	: White and Grey
Weight	: 8.7kg
Dimensions (W × H × D)	: 260mm × 176mm × 317mm

Accessories:

Power Cord and Instruction Manual

Part Number Table

Description	Part Number
Triple Channel Linear DC Power Supply, Programmable	72-13600

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Tenma is the registered trademark of the Group. © Premier Farnell Limited 2016.

www.element14.com
www.farnell.com
www.newark.com
www.cpc.co.uk

