

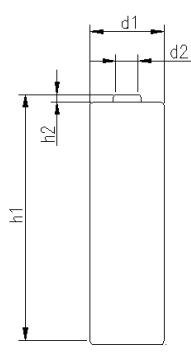
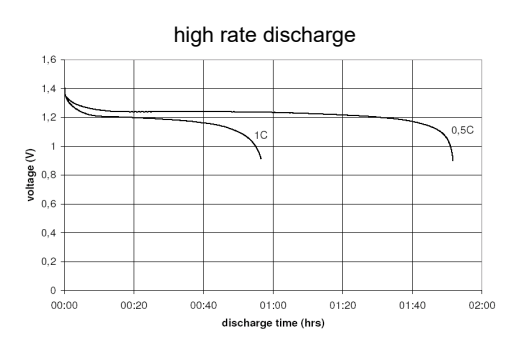
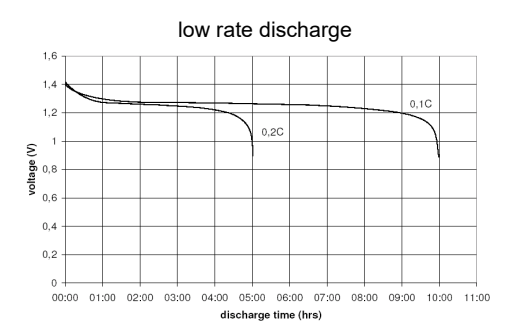


		Conditions	
<b>cell type:</b>		NiMH	
<b>cell size:</b>		AA	
<b>nominal voltage:</b>	1.2	V	
<b>max. charge voltage:</b>	1.5	V at standard charge (0.1C / 20°C)	
<b>capacity</b>			
nominal:	2100	mAh	discharge at 0.2C
minimum:	2100	mAh	discharge at 0.2C
	2000	mAh	discharge at 1C
			1.0V end discharge voltage
			ta: 20°C
<b>max. continuous discharge current:</b>	5000	mA	ta: 0...45°C
<b>charge</b>			
standard charge:	210	mA	14...16hrs
quick charge:	600	mA	4hrs
fast charge:	2100	mA	1.1hrs
recommended charge termination control parameters:	0...5	mV	- ΔV (-deltaV)
	0.8...1	°C	temperature rise per minute
	45...50	°C	TCO (temperature cut off)
trickle charge current:	10...40	mA	(recommended)
continuous overcharge: (less than 1 year)	≤ 200	mA	no conspicuous deformation no leakage
<b>internal resistance:</b> (impedance)	≤ 35	mΩ	at 1KHz battery fully charged
<b>life expectancy:</b>	≥ 500	cycles	acc. IEC standard
<b>self discharge</b>			
charge retention:	≥ 80	%	after 12 months storage at 20°C
<b>initial capacity:</b>	≥ 1400	mAh	within 30 days after delivery discharge at 0.2C
<b>ambient temperature range:</b>	0...45	°C	standard charge
	10...40	°C	fast charge
	0...45	°C	discharge (≥1C)
	- 20...65	°C	discharge (<1C)
	- 20...50	°C	storage (≤3months)
	- 20...40	°C	storage (≤6months)
	- 20...30	°C	storage (≤24months)
<b>QCT1:</b>	20/2000/35		
<b>QCT2:</b>	30/1900/40		

mechanical specifications			
cell dimensions			
diameter d1:		14.4 - 0.7	mm
diameter d2:	max.	5.5	mm
height h1:		50.5 - 0.5	mm
height h2:	min.	1.2	mm
weight:		28 ± 2	g
blister card dimensions:		123 x 85	mm
blister card weight (incl. batteries):		64	g

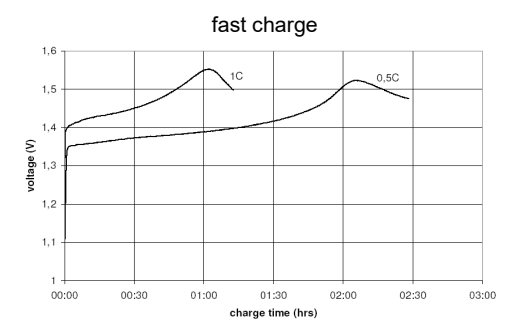

### Diagrams

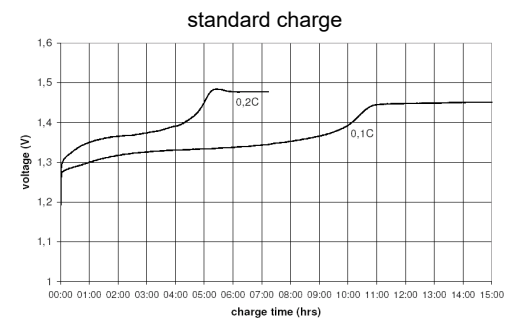

	<b>ANSMANN Specifications for model:</b>	<b>AA - 2100mAh low self discharge 2pcs blister package</b>
	data sheet no. / part no.	5030992
	supplier no.	702069
	author / date	TG / 28.02.2018

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice