


Flash

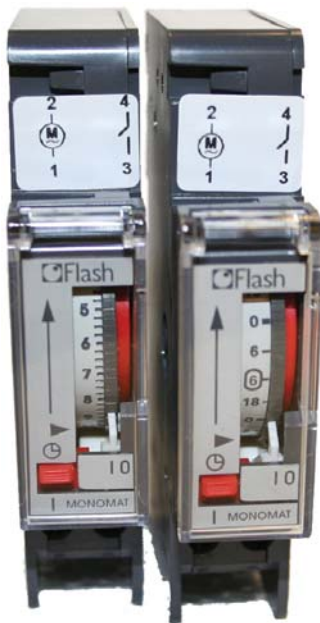

One Module

Single channel, electronic time switch


| | Features |
|--|----------|
|--|----------|

- | | |
|--|---|
| Single channel analogue time switch intended for control of heating, lighting, watering, access control etc. | <ul style="list-style-type: none"> • Simple time setting and programming. • Pivoting protective hood. • Connection by protected cage terminals |
| <ul style="list-style-type: none"> • Simple programming by unlosable segments of 15 minutes (24 hour model), 105 minutes (7 day model). | <ul style="list-style-type: none"> • 2-position manual control, AUTO and override. |

| | Functional characteristics | |
|--|----------------------------|--|
|--|----------------------------|--|

| | 24 Hours | 7 Days |
|--|---------------|--------|
| Cycle | 24 Hours | 7 Days |
| Programming in steps of | 15 min | 1 h 45 |
| Minimum interval between 2 switchings | 15 min | 1 h 45 |
| Maximum number of switchings per cycle | 96 | 96 |
| Accuracy of switching | 2 min 30 sec. | 15 min |

Dimensions

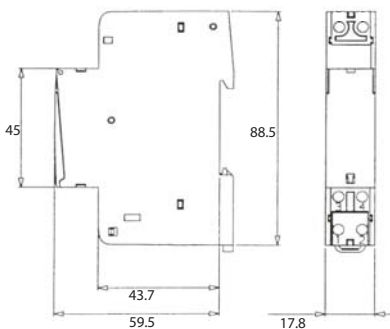


| | Technical characteristics |
|--|---------------------------|
|--|---------------------------|

- | | |
|---|--|
| Supply voltage | 230 V +/- 10% |
| Frequency | 50/60 Hz |
| Power consumption | approx. 0.5 VA |
| Changeover contacts | resistive load 16 A 250 V |
| resistive load | inductive load (cos φ = 0.6) 4 A 250 V |
| Accuracy of operation | 1 sec / 24 h. |
| Operating temperature | -10 °C to +55 °C |
| Storage temperature | -10 °C to +55 °C |
| Connection by cage terminals, section of conductors | 1 to 4 mm ² |
| Conformity to standard BS EN 60730 | yes |
| Performance indicated for an ambient temperature of 20 °C | |

Electrical Connections

Mounting

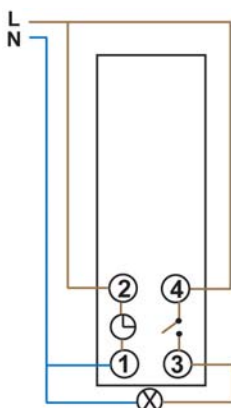

N.B.
or separate live
supply for switching

| Reference | Cycle | Voltage free normal contacts |
|-----------|-------|------------------------------|
|-----------|-------|------------------------------|

| | | |
|-------|---------|----------|
| 10002 | 24 hour | 16 (4) A |
| 10702 | 7 day | 16 (4) A |

| Reference | Accessories |
|-----------|-------------|
|-----------|-------------|

| | |
|--------|---------------------------|
| 143602 | Compatible IP40 enclosure |
|--------|---------------------------|

Sangamo Limited
 Industrial Estate, Port Glasgow, Renfrewshire, PA14 5XG
 Tel: 0845 006 6206 Fax: 01475 744567
 Email : enquiries@sangamo.co.uk Web: www.sangamo.co.uk