





Measuring leads

MVLF WS 2/10



Product	MVLF WS 2/10
description	Injection-moulded measuring lead at either end 2 mm spring-loaded pin and 2 mm diameter unsprung socket for tower constructions. Highly flexible stranded lead, grip and lead shatter-proof.
operating instruction	BA201
article-no. / *colour	9381101xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black </div> <div style="text-align: center;">  01 red </div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; margin-top: 5px;">Ni</div>
drawing	
technical data	
rated voltage ⁽¹⁾	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O ⁽³⁾
rated current ⁽¹⁾ (consider derating curve)	6 A
material plug	brass, nickel plated
housing material	PP
temperature range acc. To IEC61010 ⁽²⁾	-15 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB
cable length	10 cm
conductor size	0,5 mm ²
cable material	PVC
contact resistance	10 mOhm
standard	IEC 61010

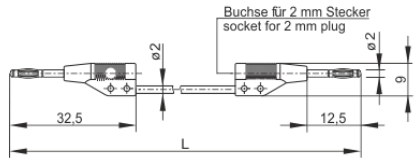2 mm F system

- ⁽¹⁾ for normal environmental conditions -5°C to +40°C
⁽²⁾ contact the manufacturer for applications at deviating temperature ranges
⁽³⁾ Other circuits that are not directly connected to mains
stand: 20.07.2018