

150lb. Dual Loop Cable Ties with 1/4" Mounting Hole

pro-POWER




Features

- Designed to mount and wrap two separate bundles of hoses, wires, cables, or tubing, in parallel to protect them from abrasion or chafing
- Increased flexibility and toughness
- Impact resistant material prevents cracking and breaking due to repeated high impacts and vibration
- 150lb. tensile strength for heavy duty applications
- Heat stabilized to provide high operating temperatures of 230°F
- Mounting hole provides option of securing bundles in heavy duty equipment
- Weather resistant UV Black for outdoor use and sun protection

Specifications

Type	: Dual Loop Cable Tie with 1/4" Mounting Hole
Material	: Nylon 6.6 / Polyamide
Colour	: Impact Resistant, UV Black Heat Stabilized
Min. Loop Tensile Strength	: 150lb. (670N)
Flammability Rating	: UL 94HB

Diagram

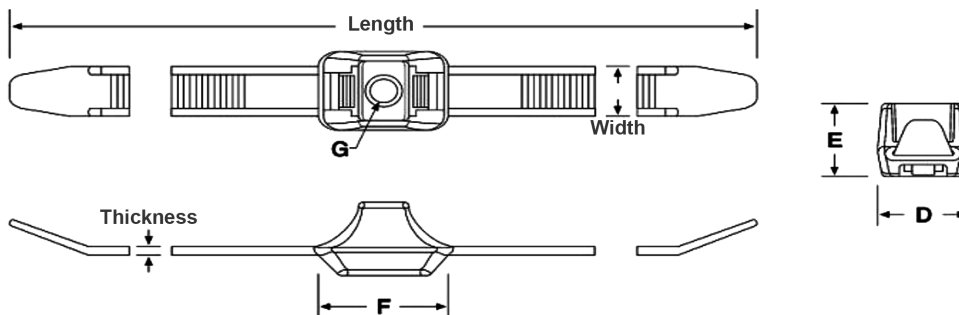

Dimensions

Part Number	Bundle Diameter	Length	Thickness	Width	D	E	F	G
	Max. Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)	Inches (mm)
PP002265	1.3 (33.02)	13.547 (344.093)	0.054 (1.371)	0.503 (12.776)	0.747 (18.973)	0.741 (18.821)	1.107 (28.117)	0.244 (6.197)
PP002266	2.3 (58.42)	19.818 (503.377)	0.057 (1.447)	0.505 (12.827)			1.122 (28.498)	

150lb. Dual Loop Cable Ties with 1/4" Mounting Hole

pro-POWER

Part Number Table

Description	Part Number
150lb. Dual Loop Cable Tie with 1/4" Mounting Hole, Impact Resistant & Heat Stabilized, 13", Nylon 6.6. UV Black, PK50	PP002265
150lb. Dual Loop Cable Tie with 1/4" Mounting Hole, Impact Resistant & Heat Stabilized, 19", Nylon 6.6. UV Black, PK50	PP002266

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell Limited 2016.

www.element14.com
www.farnell.com
www.newark.com
www.cpc.co.uk

pro-POWER