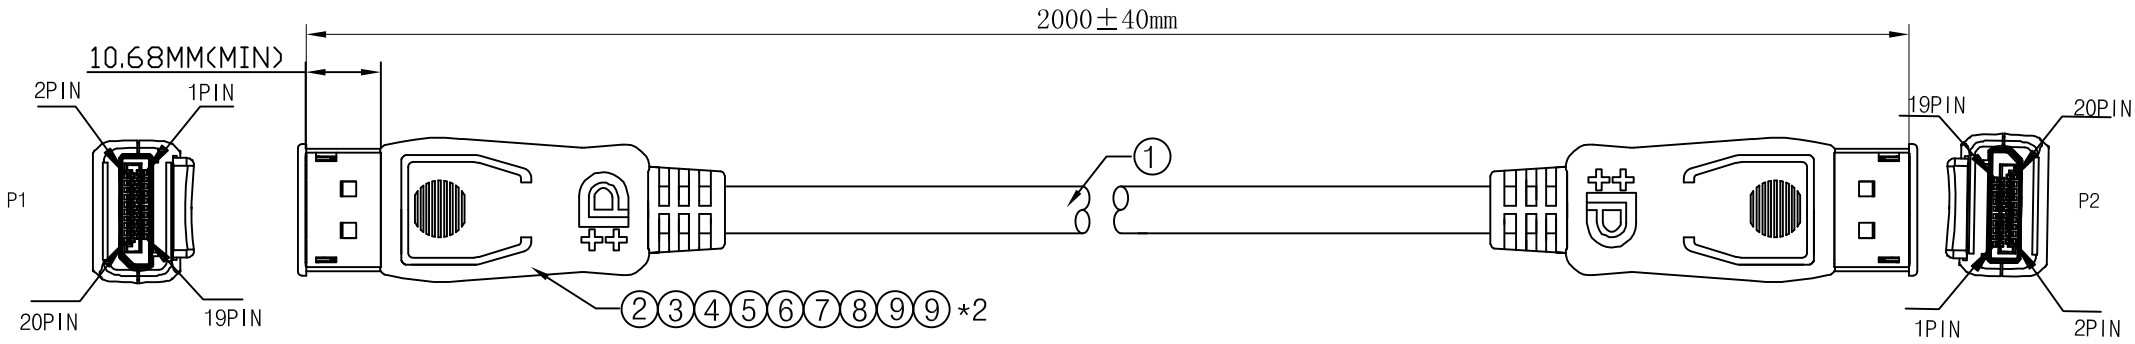

Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 3 ohm(max).
3. Insulation Resistance: DC 300V/10ms,10M ohm(MIN)

接线PIN位

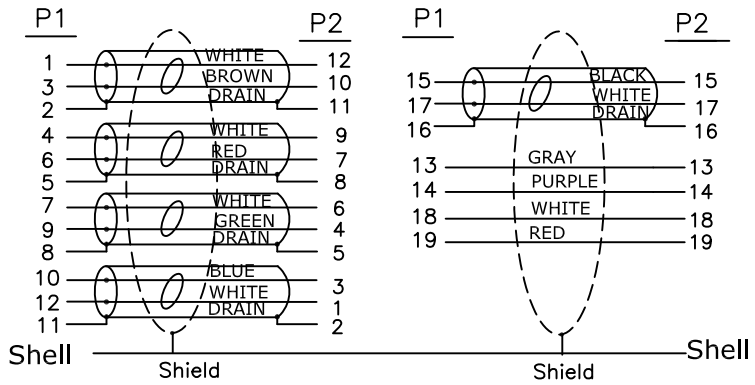

NO	ITEM	DESCRIPTION	Q'TY	UNIT
9	A6-0000099	DisplayPort M TRANSPARENT dust cover	2	pcs
8	A5-R047001	45P PVC ROHS	12	g
7	A5-R047011	TRANSPARENT PE	5	g
6	A6-R104405	DisplayPort Port M Shell Plated Nickel AFTER	2	pcs
5	A6-R104406	DisplayPort Port M Shell Plated Nickel Before	2	pcs
4	A6-R104407	DisplayPort Port M ABS shell down	2	pcs
3	A6-R104408	DisplayPort Port M ABS shell up	2	pcs
2	A2-R028354	DisplayPort M BLACK INSULATION,Shell Plated nickel,PIN 5u"	2	pcs
1	A0010303-00251	DP1.4~[28AWG(7/0.127TC)+EAM]*5P+28AWG(7/0.127TC)*4C+AEB(16/10/0.12AL 85%)OD:7.3MM~ Black~mark:DisplayPort Cable E342987 兄 AWM STYLE 20276 80℃ 30V VW-1	2	m

REV.	ECN NO.	DESCRIPTION	DATE	NAME

TOLERANCE	INCHES	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

DRAWN BY	王志斌
CHECK BY	
APPD BY	

TITLE: **Display Port 1.4 M TO M 28AWG**

CUSTOMER :	**Element14**
CUSTOMER P/N:	PSG91495
SCALE	NONE
UNIT	MM
DATE	2018.08.29
DRAWING NO:	C04180-00285
REV	A1
	1/1