


4mm Banana Plug to Plug Stackable Patchcord - 1mm² Silicone

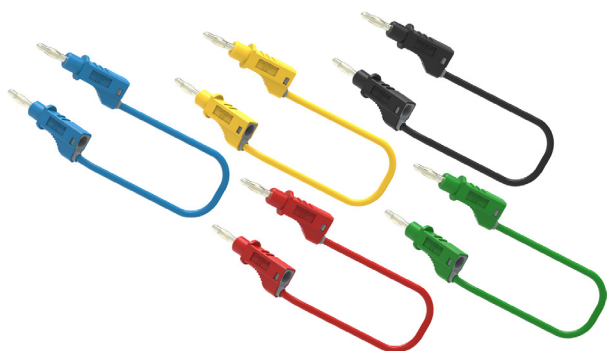

Specifications

Lead Length	: 500mm/19.7" 1m / 3.3ft 1.5m / 4.9ft 2m / 6.6ft
Connector Type A	: Stacking 4mm Banana Plug
Connector Type B	: Stacking 4mm Banana Plug
Voltage Rating	: ≤33V AC/≤70V DC
Current Rating	: 20A
Resistance	: 500mm: 15mΩ 1m: 25mΩ 1.5m: 35m Ω 2m: 45mΩ
Cable	: 1mm ² , Silicone
Contact Material	: Brass and Beryllium Copper, Nickel Plated
Insulator Material	: Polyamide and Polypropylene
Insulator Colour	: Blue, Yellow, Black, Red and Green
Temperature	: -60°C to 180°C

Application

General purpose electric and electronic testing, controlling and measuring.

Part Number Table

Description	Insulator Colour	Lead Length	Part Number
Test Lead, Stacking 4mm Banana Plug to Plug, 1mm ² Silicone, 33V AC/70V DC, 20A	Blue	500mm	72-13920
	Yellow		72-13922
	Black		72-13924
	Red		72-13926
	Green		72-13928
	Blue	1m	72-13890
	Yellow		72-13892
	Black		72-13894

www.element14.com
www.farnell.com
www.newark.com
www.cpc.co.uk



4mm Banana Plug to Plug Stackable Patchcord - 1mm² Silicone



Description	Insulator Colour	Lead Length	Part Number
Test Lead, Stacking 4mm Banana Plug to Plug, 1mm ² Silicone, 33V AC/70V DC, 20A	Red	1m	72-13896
	Green		72-13898
	Blue	1.5m	72-13900
	Yellow		72-13902
	Black		72-13904
	Red		72-13906
	Green		72-13908
	Blue	2m	72-13910
	Yellow		72-13912
	Black		72-13914
	Red		72-13916
	Green		72-13918

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Tenma is the registered trademark of the Group. © Premier Farnell Limited 2016.

