molex
one company › a world of innovation

This document was generated on 09/10/2018

# PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

**Part Number:** 0357252411

**Status:** Active

**Overview:** Standard Quick-Disconnect Terminals

**Description:** Quick Disconnect, Female, for 14-18 AWG (2.00 - 0.80mm²) Wire, Metal Strip, Tab 6.35 x 0.81mm, Slip-On Type with Slot, Post Tin Plating, High Tension Type

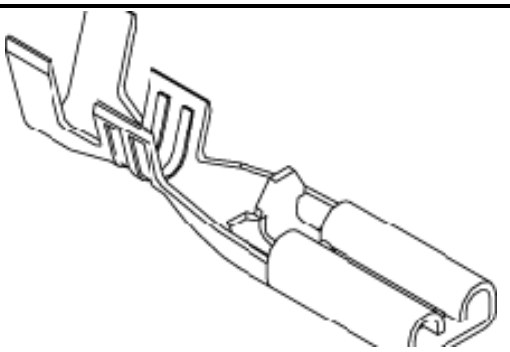

*Series image - Reference only*

**Documents:**

Drawing (PDF)
Product Specification PS-35703-001-001 (PDF)
Packaging Specification PK-35725-012-001 (PDF)
RoHS Certificate of Compliance (PDF)

**Agency Certification**

| | |
|---|---|
| UL | E92853 |

**General**

| | |
|---|---|
| Product Family | Quick Disconnects |
| Series | 35725 |
| Crimp Quality Equipment | Yes |
| Insulated | No |
| Overview | Standard Quick-Disconnect Terminals |
| Product Name | N/A |
| Type | Quick Disconnect |
| UPC | 800756081878 |

**Physical**

| | |
|---|---|
| Barrel Type | Open |
| Gender | Female |
| Glow-Wire Capable | No |
| Insulation | None |
| Lock to Mating Part | Yes |
| Material - Metal | Brass |
| Net Weight | 0.853/g |
| Orientation | Straight |
| Packaging Type | Reel |
| Polarized to Mating Part | No |
| Tab Thickness | 0.81mm |
| Tab Width | 6.35mm |
| Temperature Range - Operating | -40° to +120°C |
| Wire Insulation Diameter | 3.81mm max. |
| Wire Size AWG | 14, 16, 18 |

**Electrical**

| | |
|---|---|
| Voltage - Maximum | 300V |

**Material Info**

**Reference - Drawing Numbers**

| | |
|---|---|
| Packaging Specification | PK-35725-012-001 |
| Product Specification | PS-35703-001-001 |
| Sales Drawing | SD-35725-002 |

**EU ELV**
**Not Relevant**

**EU RoHS**
**Compliant**

**China RoHS**

**REACH SVHC**
Not Contained Per - ED/61/2018 (27 June 2018)

**Halogen-Free Status**
**Low-Halogen**

**Need more information on product environmental compliance?**

Email productcompliance@molex.com
Please visit the Contact Us section for any non-product compliance questions.

| | |
|---|---|
| China ROHS | Green Image |
| ELV | Not Relevant |
| Prop65 | Compliant |
| RoHS Phthalates | Not Contained |

**Search Parts in this Series**
35725 Series

**Use With**
6.35mm Tab

**Application Tooling** | **FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

| Description | Product # |
|---|---|
| Hand Tool for .250 Slip-in Receptacle Terminals for 14-18 AWG Wire. | 0638272100 |

This document was generated on 09/10/2018
**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**