

Gate Driver Providing Galvanic Isolation Series

Isolation Voltage 2500Vrms

1ch Gate Driver Providing Galvanic Isolation

BM60052AFV-C

General Description

The BM60052AFV-C is a gate driver with isolation voltage 2500Vrms, I/O delay time of 120ns, and a minimum input pulse width of 90ns. Fault signal output function, ready signal output function, under voltage lockout (UVLO) function, thermal protection function, desaturation protection (DESAT) function, miller clamp function, switching controller function and output state feedback function are all built-in.

Key Specifications

■ Isolation Voltage:	2500Vrms
■ Maximum Gate Drive Voltage:	20V (Max)
■ I/O Delay Time:	120ns (Max)
■ Minimum Input Pulse Width:	90ns (Max)

Package

SSOP-B28W

W(Typ) x D(Typ) x H(Max)

9.2 mm x 10.4 mm x 2.4 mm

Features

- AEC-Q100 Qualified^(Note 1)
- Fault Signal Output Function
- Ready Signal Output Function
- Under Voltage Lockout Function
- Desaturation Protection Function
- Soft Turn-Off Function for Desaturation Protection (Adjustable Turn-Off time)
- Thermal Protection Function
- Active Miller Clamping
- Switching Controller Function
- Output State Feedback Function
- UL1577 Recognized: File No. E356010 (pending)

^(Note 1) Grade 1



SSOP-B28W

Applications

- Automotive Inverter
- Automotive DC-DC Converter
- Industrial inverter System
- UPS System

Typical Application Circuit

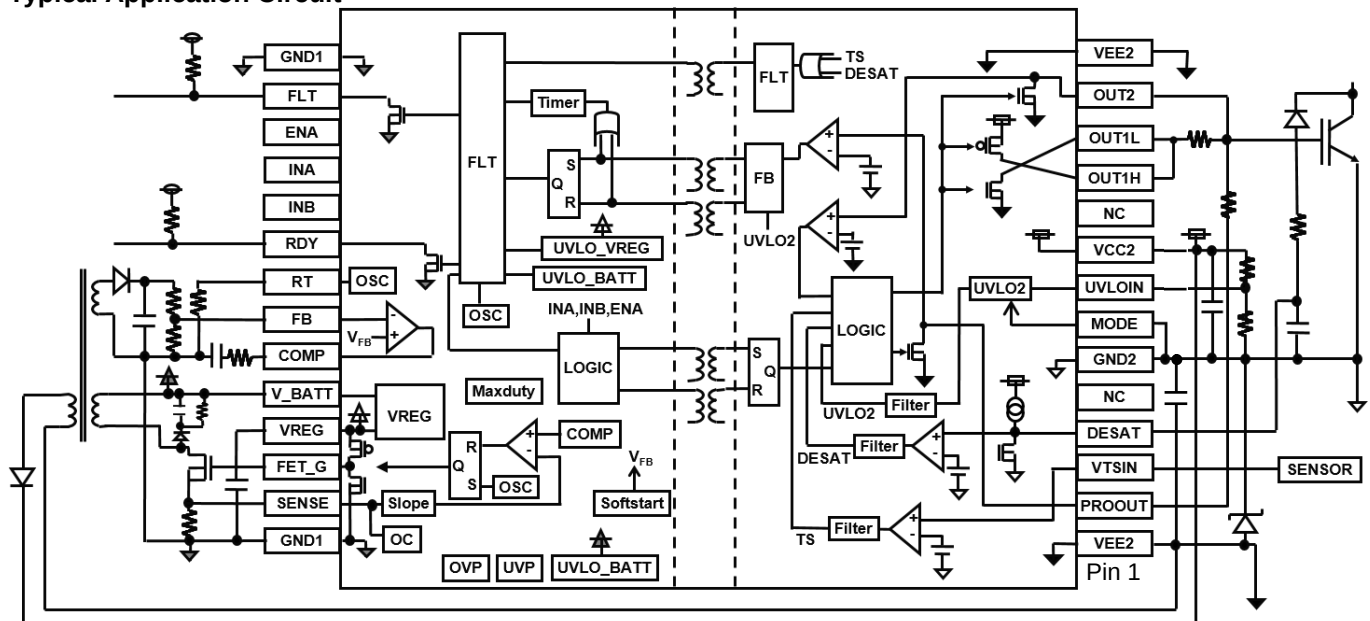


Figure 1. Typical Application Circuit

○Product structure : Semiconductor integrated circuit ○This product has no designed protection against radioactive rays

www.rohm.com

© 2018 ROHM Co., Ltd. All rights reserved.

TSZ22111 • 14 • 001

Contents

General Description	1
Features	1
Applications	1
Key Specifications	1
Package W(Typ) x D(Typ) x H(Max)	1
Typical Application Circuit	1
Contents	2
Recommended Range of External Constants	3
Pin Configuration	3
Pin Descriptions	3
Description of Functions and Examples of Constant Setting	6
Absolute Maximum Ratings	16
Thermal Resistance ^(Note 5)	17
Recommended Operating Conditions	17
Insulation Related Characteristics	17
Electrical Characteristics	18
UL1577 Ratings Table (pending)	20
Typical Performance Curves	21
Figure 18. Main Power Supply Circuit Current vs Main Power Supply Voltage	21
Figure 19. Output-side Circuit Current vs Output-side Positive Supply Voltage (MODE=H, V _{EE2} =0V, OUT1=L)	21
Figure 20. Output-side Circuit Current vs Output-side Positive Supply Voltage (MODE=H, V _{EE2} =0V, OUT1=H)	21
Figure 21. FET_G ON-resistance vs Temperature (Source /Sink)	21
Figure 22. Oscillation Frequency vs RT Resistance	22
Figure 23. Soft-start Time vs Temperature	22
Figure 25. COMP Pin Sink Current vs Temperature	22
Figure 24. FB Pin Threshold Voltage vs Temperature	22
Figure 26. COMP Pin Source Current vs Temperature	23
Figure 27. Over Current Detection Threshold vs Temperature	23
Figure 28. Logic Input Filtering Time vs Temperature (L pulse)	23
Figure 29. Logic Input Filtering Time vs Temperature (H pulse)	23
Figure 31. MODE Input Voltage vs Temperature (V _{CC2} =14V)	24
Figure 30. ENA Input Filtering Time Figure vs Temperature	24
Figure 32. OUT1H ON-resistance (Source) vs Temperature (I _{OUT1H} =-40mA)	24
Figure 33. OUT1L ON-resistance (Sink) vs Temperature (I _{OUT1L} =40mA)	24
Figure 35. Turn ON Time vs Temperature	25
Figure 34. PROOUT ON-resistance vs Temperature (I _{PROOUT} =40mA)	25
Figure 37. OUT2 ON-resistance vs Temperature (I _{OUT2} =40mA)	25
Figure 36. Turn OFF Time vs Temperature	25
Figure 38. DESAT Charging Current vs Temperature	26
Figure 39. DESAT Detection Voltage vs Temperature	26
Figure 40. DESAT Leading Edge Blanking Time vs Temperature	26
Figure 41. DESAT Detection Filter Time vs Temperature	26
Figure 42. DESAT Detection Delay Time (PROOUT) vs Temperature	27
Figure 43. DESAT Pin Low Voltage vs Temperature	27
Figure 44. Output Delay Difference between PROOUT and FLT vs Temperature	27
Figure 45. Thermal Detection Voltage vs Temperature	27
Selection of Components Externally Connected	28
I/O Equivalence Circuits	29
Operational Notes	33
Ordering Information	35
Marking Diagram	35
Physical Dimension and Packing Information	36
Revision History	37

Recommended Range of External Constants

Pin Name	Symbol	Recommended Value			Unit
		Min	Typ	Max	
VREG	C _{VREG}	1.0	3.3	10.0	μF
VCC2	C _{VCC2}	0.33	-	-	μF
RT	R _{RT}	24	68	150	kΩ

Pin Configuration

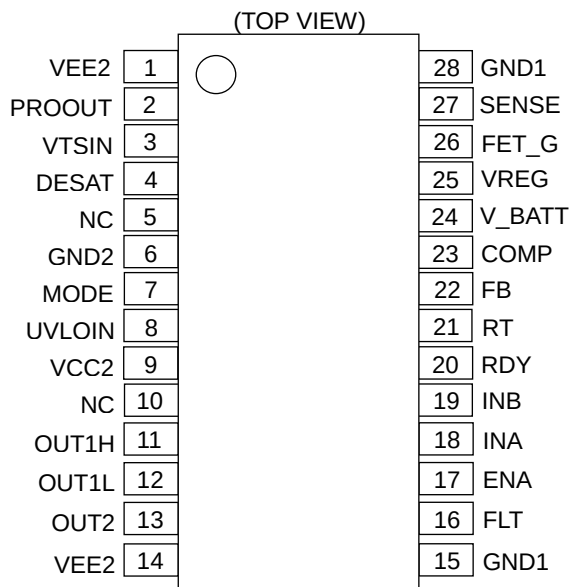


Figure 2. Pin Configuration

Pin Descriptions

Pin No.	Pin Name	Function
1	VEE2	Output-side negative power supply pin
2	PROOUT	Soft turn-off pin/Gate voltage input pin
3	VTSIN	Temperature sensor voltage input pin
4	DESAT	Desaturation detection pin
5	NC	Non-connection
6	GND2	Output-side ground pin
7	MODE	Mode selection pin of output-side UVLO
8	UVLOIN	Output-side UVLO setting input pin
9	VCC2	Output-side positive power supply pin
10	NC	Non-connection
11	OUT1H	Source side output pin
12	OUT1L	Sink side output pin
13	OUT2	Miller Clamp pin
14	VEE2	Output-side negative power supply pin
15	GND1	Input-side ground pin
16	FLT	Fault output pin
17	ENA	Input enabling signal input pin
18	INA	Control input pin A
19	INB	Control input pin B
20	RDY	Ready output pin
21	RT	Switching frequency setting pin for switching controller
22	FB	Error amplifier inverting input pin for switching controller
23	COMP	Error amplifier output pin for switching controller
24	V_BATT	Main power supply pin
25	VREG	Input-side internal power supply pin
26	FET_G	MOS FET control pin for switching controller
27	SENSE	Current detection pin for switching controller
28	GND1	Input-side ground pin

Pin Descriptions – continued

1. V_BATT (Main power supply pin)
This is the main power supply pin. Connect a bypass capacitor between the V_BATT and GND1 pins in order to suppress voltage variations.
2. GND1 (Input-side ground pin)
The GND1 pin is a ground pin on the input side.
3. VCC2 (Output-side positive power supply pin)
The VCC2 pin is a positive power supply pin on the output side. To reduce voltage fluctuations due to the OUT1H/OUT1L pin output current and due to the driving current of the internal transformers, connect a bypass capacitor between the VCC2 and GND2 pins.
4. VEE2 (Output-side negative power supply pin)
The VEE2 pin is a negative power supply pin on the output side. To reduce voltage fluctuations due to the OUT1H/OUT1L pin output current and due to the driving current of the internal transformers, connect a bypass capacitor between the VEE2 and the GND2 pins. Connect the VEE2 pin to the GND2 pin when no negative power supply is used.
5. GND2 (Output-side ground pin)
The GND2 pin is a ground pin on the output side. Connect the GND2 pin to the emitter/source of a power device.

6. INA, INB, ENA (Control Input pin)
The INA, INB, ENA are pins used to determine output logic.

ENA	INB	INA	OUT1H	OUT1L
L	X	X	Hi-Z	L
H	H	X	Hi-Z	L
H	L	L	Hi-Z	L
H	L	H	H	Hi-Z

7. FLT (Fault output pin)
The FLT pin is an open drain pin used to output a fault signal when desaturation protection function (DESAT) or thermal protection function is activated, and fault state (FLT=L output) is released in rising of ENA (L to H).

Status	FLT
While in normal operation	Hi-Z
When DESAT or thermal protection is activated	L

8. RDY (Ready output pin)
The RDY pin is an open drain pin that outputs an internal abnormal state (V_BATT UVLO, VCC2 UVLO, output state feedback). 'output state feedback' is a function to compare gate logic monitored by the PROOUT pin with input logic, and outputs L when it does not match.

Status	RDY
While in normal operation	Hi-Z
V_BATT UVLO or VCC2 UVLO or Output state feedback (disaccord)	L

9. MODE (Mode selection pin of output-side UVLO)
The MODE pin is a pin which selects internal threshold or external setting threshold for output-side UVLO.

MODE	Output-side UVLO threshold voltage
L (=GND2)	Setting by external (Use UVLOIN pin)
H (=VCC2)	Fixed (=V _{UVLO2L}) (Connect UVLOIN pin to VCC2 pin)

10. UVLOIN (Output-side UVLO setting input pin)
The UVLOIN pin is a pin for deciding UVLO setting value of VCC2. The threshold value of UVLO can be set by dividing the resistance voltage of VCC2. UVLOIN activates only at the MODE pin=L. When the MODE pin=H, connect the UVLOIN pin to the VCC2 pin.
11. OUT1H, OUT1L (Output pin)
The OUT1H pin is a source side pin used to drive the gate of a power device, and the OUT1L pin is a sink side pin used to drive the gate of a power device.

Pin Descriptions – continued**12. OUT2 (Miller Clamp pin)**

This is the miller clamp pin for preventing a rise of gate voltage due to miller current of output element connected to the OUT1H/OUT1L pin. It also functions as a pin for monitoring gate voltage for miller clamp. The OUT2 pin voltage become less than V_{OUT2ON} (Typ 2.0V), miller clamp function operates. The OUT2 pin should be connect to the VEE2 pin when miller clamp function is not used.

13. PROOUT (Soft turn-off pin/Gate voltage input pin)

This is a pin for soft turn-off of output element when desaturation protection or thermal protection is in action. It also functions as a pin for monitoring gate voltage for output state feedback function.

14. DESAT (Desaturation detection pin)

This is a detection pin for DESAT protection. When the DESAT pin voltage $V_{DESATDET}$ or more, DESAT function will be activated. This may cause the IC to malfunction in an open state. To avoid such trouble, short circuit the DESAT pin to the GND2 pin when the desaturation protection is not used. In order to prevent the wrong detection due to noise, the noise filter time $t_{DESATFIL}$ is set.

15. VTSIN (Temperature sensor voltage input pin)

The VTSIN pin is a temperature sensor voltage input pin, which can be used for thermal protection of an output device. If VTSIN pin voltage becomes V_{TSDet} or less, the thermal protection function will be activated. IC may malfunction in the open status, so be sure to supply the VTSIN more than V_{TSDet} if the thermal protection function is not used. In order to prevent the wrong detection due to noise, the noise mask time t_{TSFIL} is set. In addition, it can be used also as a compulsive shutdown pin other than a temperature sense by inputting a comparator output etc.

16. RT (Switching frequency setting pin for switching controller)

The RT pin is a pin used to make setting of switching frequency of switching controller. The switching frequency is determined by the resistance value connected between the RT and GND pins. The value of switching frequency is determined by the value of the resistor R_{RT} .

$$f_{SW} = 1 / (7.3 \times 10^{-8} \times R_{RT} + 2.2 \times 10^{-4}) \quad [\text{kHz}]$$

17. FB (Error amplifier inverting input pin for switching controller)

This is a voltage feedback pin of the switching controller. This pin combine with voltage monitoring at overvoltage protection function and under voltage protection function for switching controller. When overvoltage or under voltage protection is activated, switching controller will be at OFF state (the FET_G pin outputs L). When the protection holding time t_{DCDCLS} is completed, the protection function will be released. Under voltage function is not activated during soft-start.

18. COMP (Error amplifier output pin for switching controller)

This is the gain control pin of the switching controller. Connect a phase compensation capacitor and resistor.

19. VREG (Input-side internal power supply pin)

This is the input-side internal power supply pin. Be sure to connect a bypass capacitor between the VREG and GND pins even when the switching controller is not used, in order to prevent oscillation and suppress voltage variation due to FET_G output current and IC internal transformer drive current.

20. FET_G (MOSFET control pin for switching controller)

This is a MOSFET control pin for the switching controller transformer drive.

21. SENSE (Current detection pin for switching controller)

This is a pin connected to the resistor of the switching controller current feedback. This pin combines with current monitoring at overcurrent restriction function for switching controller. When overcurrent restriction is activated, switching controller will be at OFF state (the FET_G pin outputs L), and the overcurrent restriction function will be released in the next switching period.

Description of Functions and Examples of Constant Setting

1. Miller Clamp Function
- When OUT1H/OUT1L=Hi-Z/L and the OUT2 pin voltage<V_{OUT2ON}, internal MOS of the OUT2 pin is turned ON and miller clamp function operates. Miller clamp will be maintained until next turn on (OUT1H/OUT1L=H/Hi-Z).

IN	OUT2 pin input voltage	OUT2 output
L	less than V _{OUT2ON}	L
H	X	Hi-Z

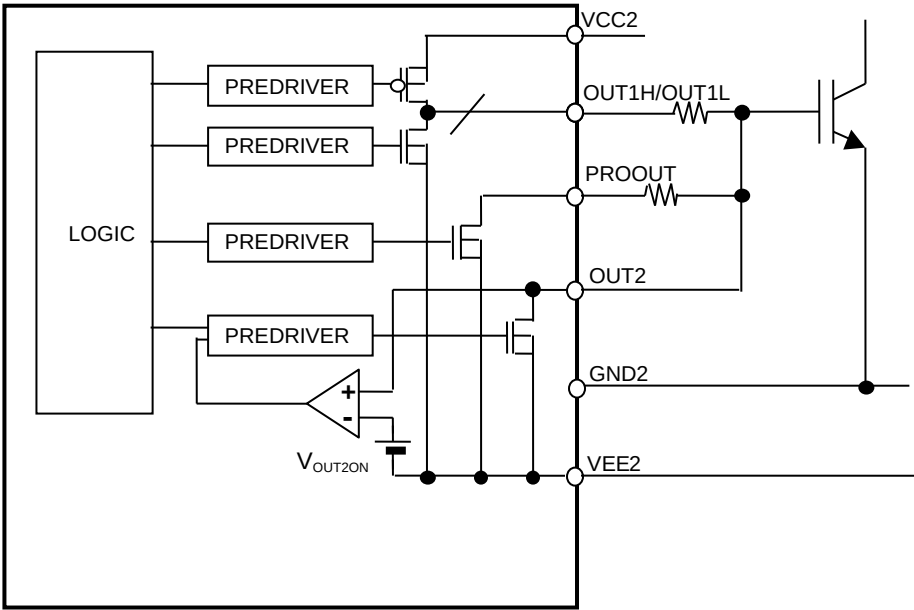


Figure 3. Block Diagram of Miller Clamp Function

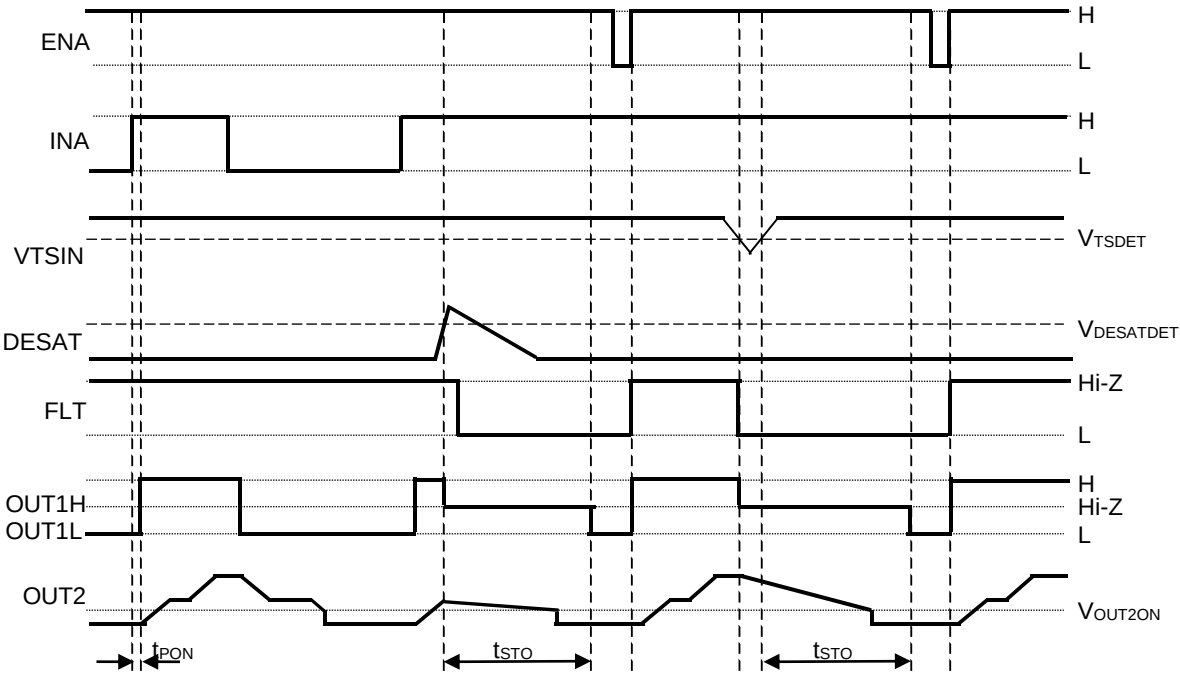


Figure 4. Timing Chart of Miller Clamp Function

Description of Functions and Examples of Constant Setting – continued

2. Under Voltage Lockout (UVLO)Function

The BM60052AFV-C has the under voltage lockout (UVLO) function on V_BATT and VCC2. When the power supply voltage drops to $V_{UVLOBATTL}$, $V_{UVLOINL}$ (MODE=L), or V_{UVLO2L} (MODE=H), the OUT1H/OUT1L pin will output the "Hi-Z/L" and the RDY pin will output the "L" signal. When the power supply voltage rises to $V_{UVLOBATTH}$ ($=V_{UVLOBATTL}+V_{UVLOBATTHYS}$), $V_{UVLOINH}$ ($=V_{UVLOINL}+V_{UVLOINHYS}$) or V_{UVLO2H} ($=V_{UVLO2L}+V_{UVLO2HYS}$), these pins will be reset. In addition, to prevent miss-triggers due to noise, mask time $t_{UVLOBATTFIL}$ and $t_{UVLO2FIL}$ are set on both voltage sides.

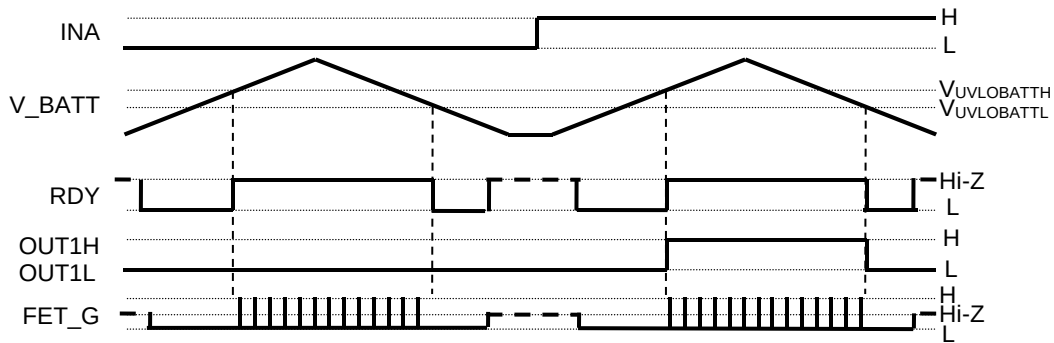


Figure 5. V_BATT UVLO Function Operation Timing Chart

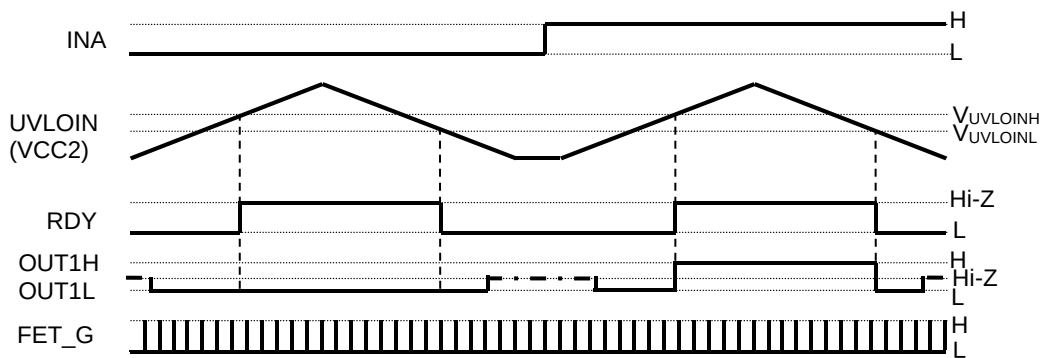


Figure 6. VCC2 UVLO Function Operation Timing Chart (MODE=L)

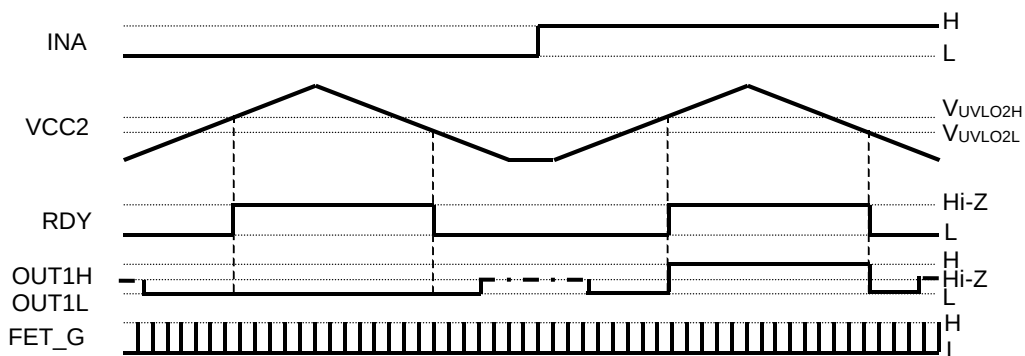


Figure 7. VCC2 UVLO Function Operation Timing Chart (MODE=H)

- - - - : Since the V_BATT to GND1 pin voltage is low and the output MOS does not turn ON, the output pins become Hi-Z conditions.
- : Since the VCC2 to VEE2 pin voltage is low and the output MOS does not turn ON, the output pins become Hi-Z conditions.

Description of Functions and Examples of Constant Setting – continued

3. Desaturation Protection Function

When the DESAT pin voltage V_{DESATDET} or more, the desaturation protection function will be activated. When the desaturation protection function is activated, the OUT1H/OUT1L pin voltage will be set to the “Hi-Z/Hi-Z” level and the PROOUT pin voltage will go to the “L” level first (soft turn-off). Next, after t_{STO} has passed, the OUT1H/OUT1L pin become Hi-Z/L (PROOUT pin hold L). When the rising edge is put in the ENA pin after $\text{ENA}=\text{L}$ ($>t_{\text{ENAFIL}}$), the desaturation protection function will be released. When the OUT1H/OUT1L pin become Hi-Z/L or Hi-Z/Hi-Z, MOSFET built-in between the DESAT pin and the GND2 pin turns ON to discharge C_{BLANK} for desaturation protection function. When the OUT1H/OUT1L pin become H/Hi-Z, internal MOSFET connected to the DESAT pin turns OFF. Blank time $t_{\text{BLANKEXTERNAL}}$ can be set by the following formula.

$$t_{BLANKEXTERNAL} = \frac{C_{BLANK} \times V_{DESATDET}}{I_{DESATC}} + t_{DESATLEB} \quad [s]$$

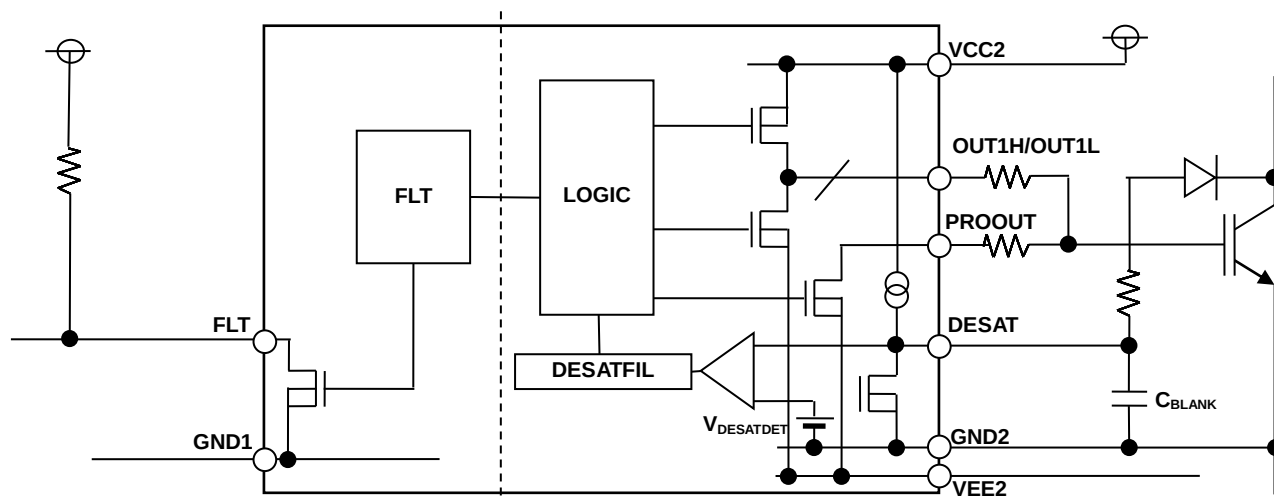


Figure 8. Block Diagram of DESAT

3. Description of Functions – continued

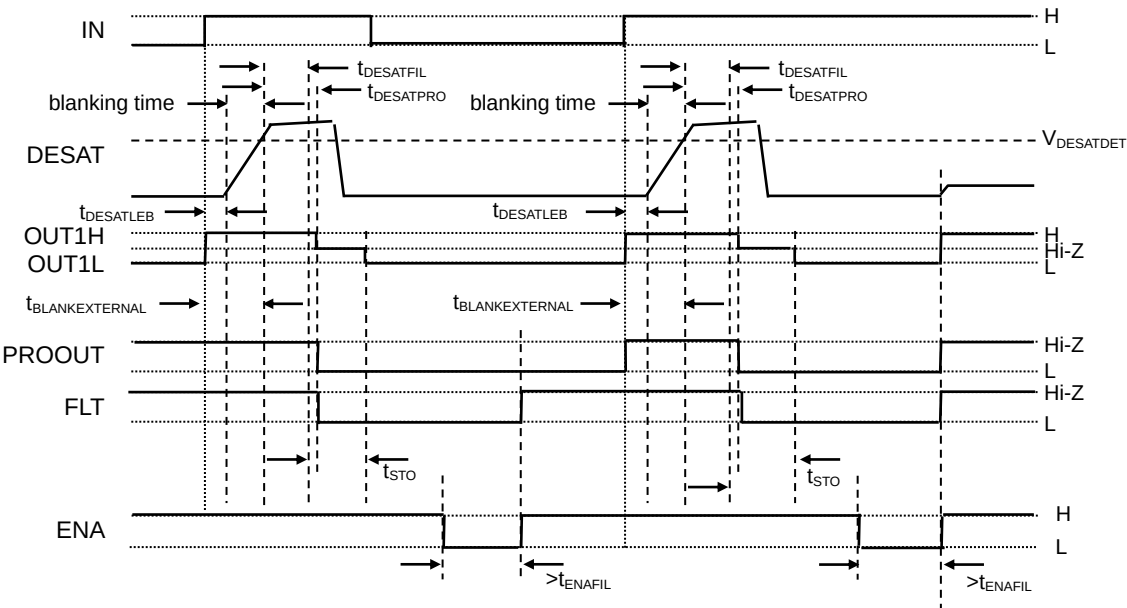


Figure 9. DESAT Operation Timing Chart

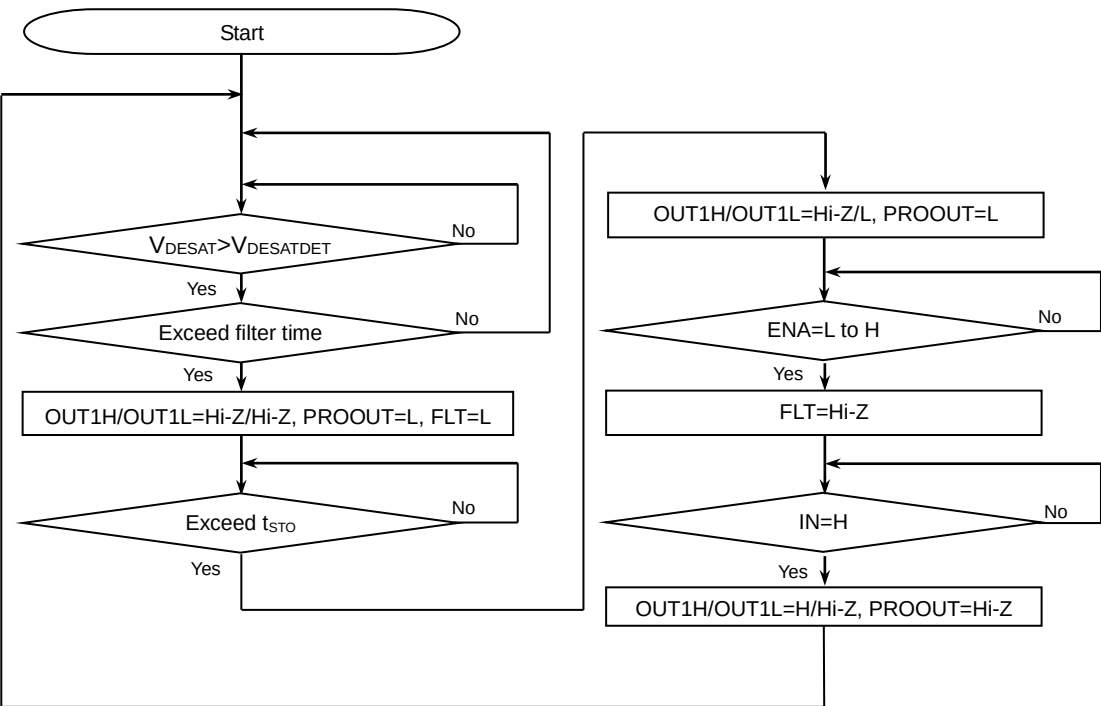


Figure 10. DESAT Operation Status Transition Diagram

Description of Functions and Examples of Constant Setting – continued

4. Thermal Protection Function

When the VTSIN pin voltage becomes $V_{TSD\text{ET}}$ or less, the thermal protection function will be activated. When the thermal protection function is activated, the OUT1H/OUT1L pin voltage will be set to the "Hi-Z/Hi-Z" level and the PROOUT pin voltage will go to the "L" level first (soft turn-off). Next, when the VTSIN pin voltage rises to the threshold value and after t_{STO} has passed, the OUT1H/OUT1L pin become Hi-Z/L (the PROOUT pin hold L). When the rising edge of the ENA pin after $\text{ENA}=\text{L}$ ($>t_{\text{ENAFIL}}$), the thermal protection function will be released.

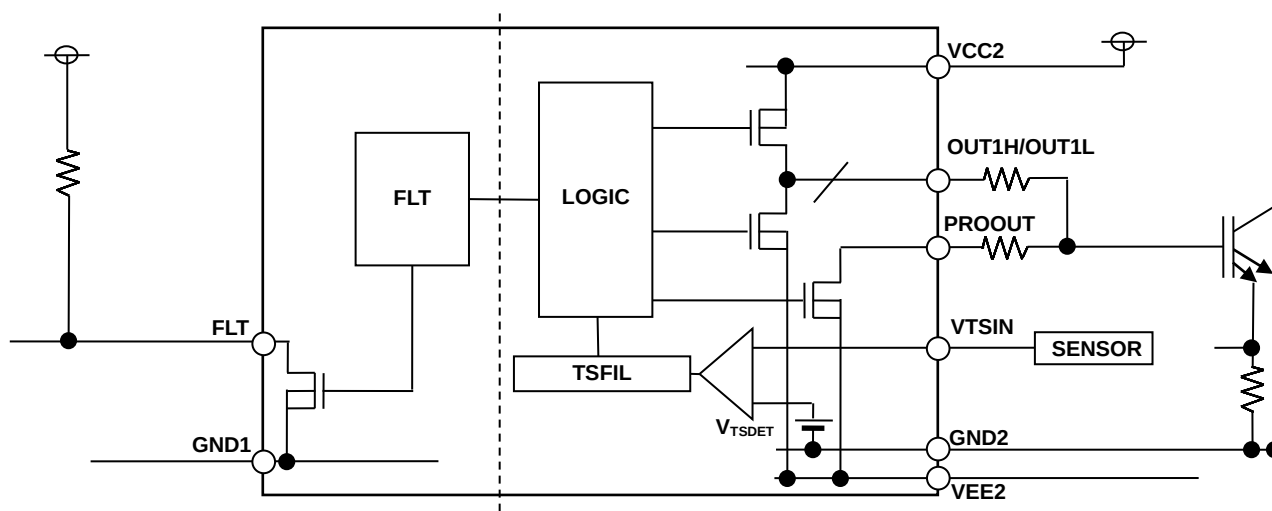


Figure 11. Block Diagram of Thermal Protection Function

4. Thermal Protection Function – continued

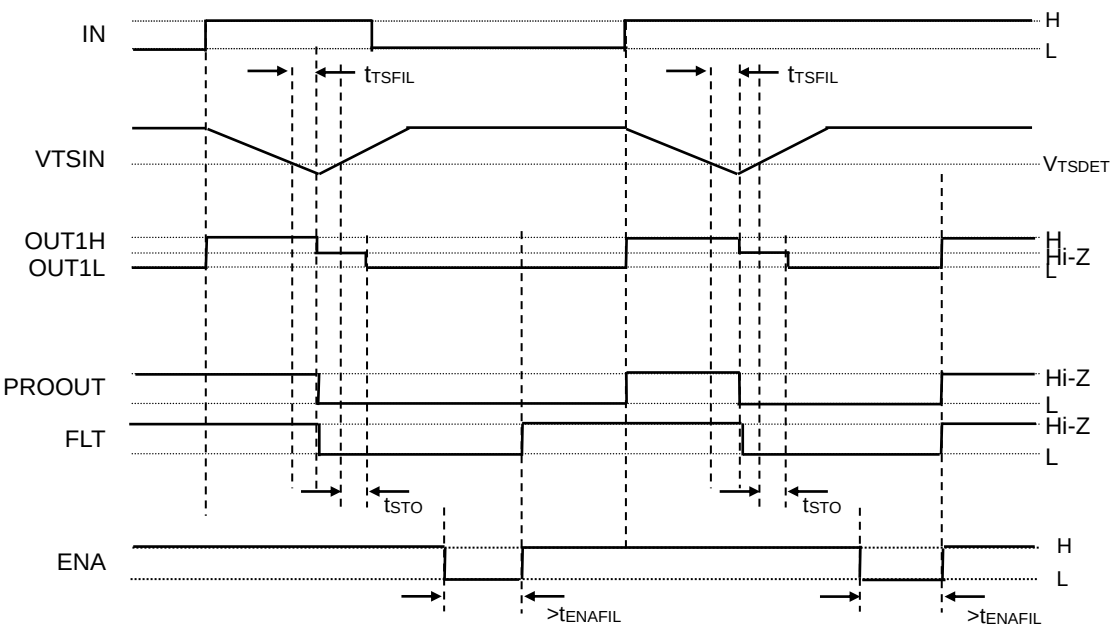


Figure 12. Thermal Protection Function Operation Timing Chart

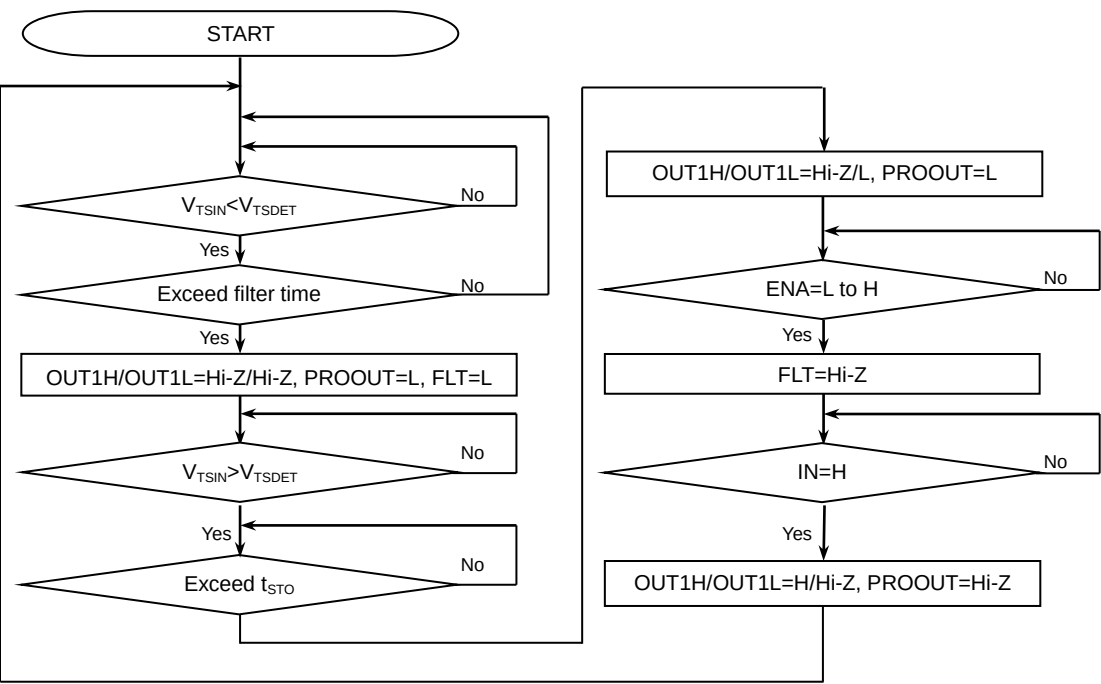


Figure 13. Thermal Protection Function Operation Status Transition Diagram

Description of Functions and Examples of Constant Setting – continued

5. Switching Controller

(a) Basic action

This IC has a built-in switching power supply controller which repeats ON/OFF synchronizing with internal clock set by RT pin. When V_BATT voltage is supplied ($V_{BATT} > V_{UVLOBATT} (= V_{UVLOBATTL} + V_{UVLOBATTHYS})$), FET_G pin starts switching by soft-start. Output voltage is determined by the following equation depending on external resistance and winding ratio “n” of fly back transformer ($n = V_{OUT2} \text{ side winding number} / V_{OUT1} \text{ side winding number}$)

$$V_{OUT2} = V_{FB} \times \{(R_1 + R_2) / R_2\} \times n \quad [V]$$

(b) Max duty

When, for example, output load is large, and voltage level of the SENSE pin does not reach current detection level, output is forcibly turned OFF by Maximum ON Duty (D_{ONMAX}).

(c) Protection function

The switching controller has the overvoltage protection (OVP) and the under voltage protection (UVP) as protection functions, and monitoring the FB pin voltage.

When the protection function is activated, switching controller will be OFF state (the FET_G pin outputs L). The protection holding time ($t_{DCDCRLS}$) is completed, the protection function will be released. Under voltage function is not activated during soft-start.

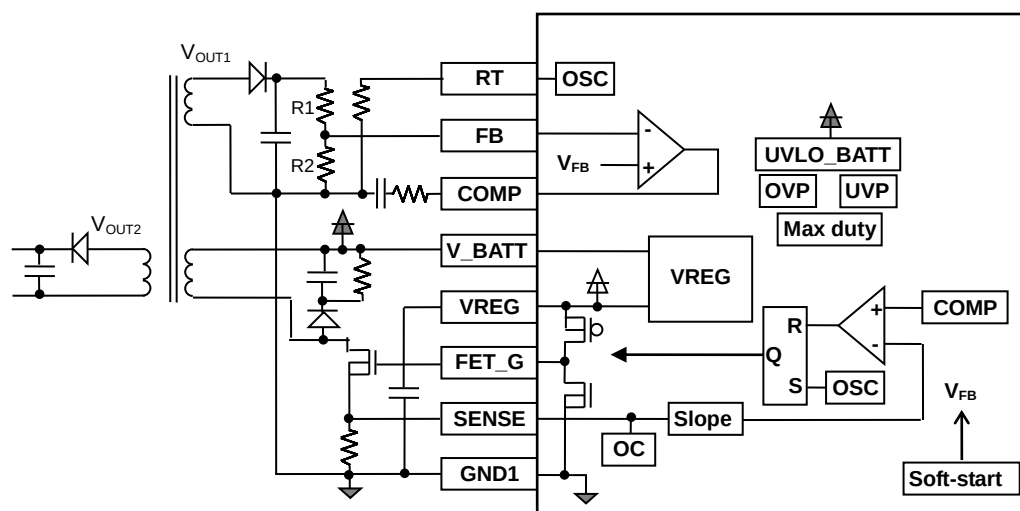


Figure 14. Block Diagram of Switching Controller

5. Switching Controller – continued
- (d)The pin handling when not using switching controller
- When not using switching controller, do pin handling as follows.

Pin No.	Pin Name	Processing Method
21	RT	pull down in GND1 by 68kΩ
22	FB	connect to VREG
23	COMP	connect to GND1
24	V_BATT	connect power supply
25	VREG	connect capacitor
26	FET_G	open
27	SENSE	connect to VREG

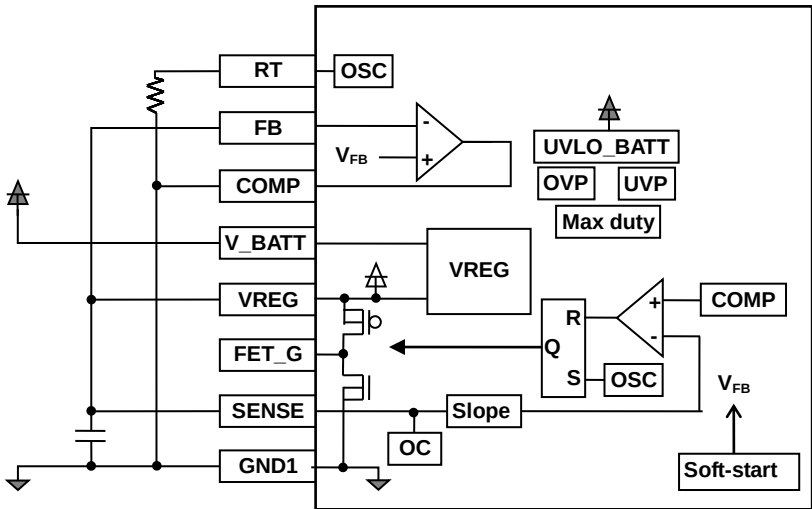


Figure 15. The pin handling when not using switching controller

6. Gate State Monitoring Function
- When input logic and gate logic of output device monitored with the PROOUT pin are compared, a logic L is output from the RDY pin when they disaccord. In order to prevent the detection error due to delay of input and output, OSFB (Output state feedback) filter time $t_{OSFBFIL}$ is provided.

Description of Functions and Examples of Constant Setting – continued


7. I/O Condition Table

No.	Status	Input									Output					
		V_BATT	VCC2	DESAT	VTSIN	ENA	INB	INA	OUT2	PROOUT	OUT1H	OUT1L	OUT2	PROOUT	FLT	RDY
1	DESAT Protection	○	○	H	H	H	L	H	H	X	Hi-Z	Hi-Z	Hi-Z	L	L	Hi-Z
2		○	○	H	H	H	L	H	L	X	Hi-Z	Hi-Z	L	L	L	Hi-Z
3	UVLO_VBATT	UVLO	○	L	H	X	X	X	H	H	Hi-Z	L	Hi-Z	Hi-Z	Hi-Z	L
4		UVLO	○	L	H	X	X	X	L	L	Hi-Z	L	L	Hi-Z	Hi-Z	L
5	UVLO_VCC2	○	UVLO	L	H	X	X	X	H	H	Hi-Z	L	Hi-Z	Hi-Z	Hi-Z	L
6		○	UVLO	L	H	X	X	X	L	L	Hi-Z	L	L	Hi-Z	Hi-Z	L
7	Thermal Protection	○	○	L	L	X	X	X	H	X	Hi-Z	Hi-Z	Hi-Z	L	L	Hi-Z
8		○	○	L	L	X	X	X	L	X	Hi-Z	Hi-Z	L	L	L	Hi-Z
9	Disable	○	○	L	H	L	X	X	H	H	Hi-Z	L	Hi-Z	Hi-Z	Hi-Z	L
10		○	○	L	H	L	X	X	L	L	Hi-Z	L	L	Hi-Z	Hi-Z	Hi-Z
11	INB Active	○	○	L	H	H	H	X	H	H	Hi-Z	L	Hi-Z	Hi-Z	Hi-Z	L
12		○	○	L	H	H	H	X	L	L	Hi-Z	L	L	Hi-Z	Hi-Z	Hi-Z
13	Normal Operation L Input	○	○	L	H	H	L	L	H	H	Hi-Z	L	Hi-Z	Hi-Z	Hi-Z	L
14		○	○	L	H	H	L	L	L	L	Hi-Z	L	L	Hi-Z	Hi-Z	Hi-Z
15	Normal Operation H Input	○	○	L	H	H	L	H	H	H	H	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Hi-Z
16		○	○	L	H	H	L	H	L	L	H	Hi-Z	Hi-Z	Hi-Z	Hi-Z	L

○: > UVLO, X: Don't care

Description of Functions and Examples of Constant Setting – continued

8. Power Supply Startup/Shutdown Sequence

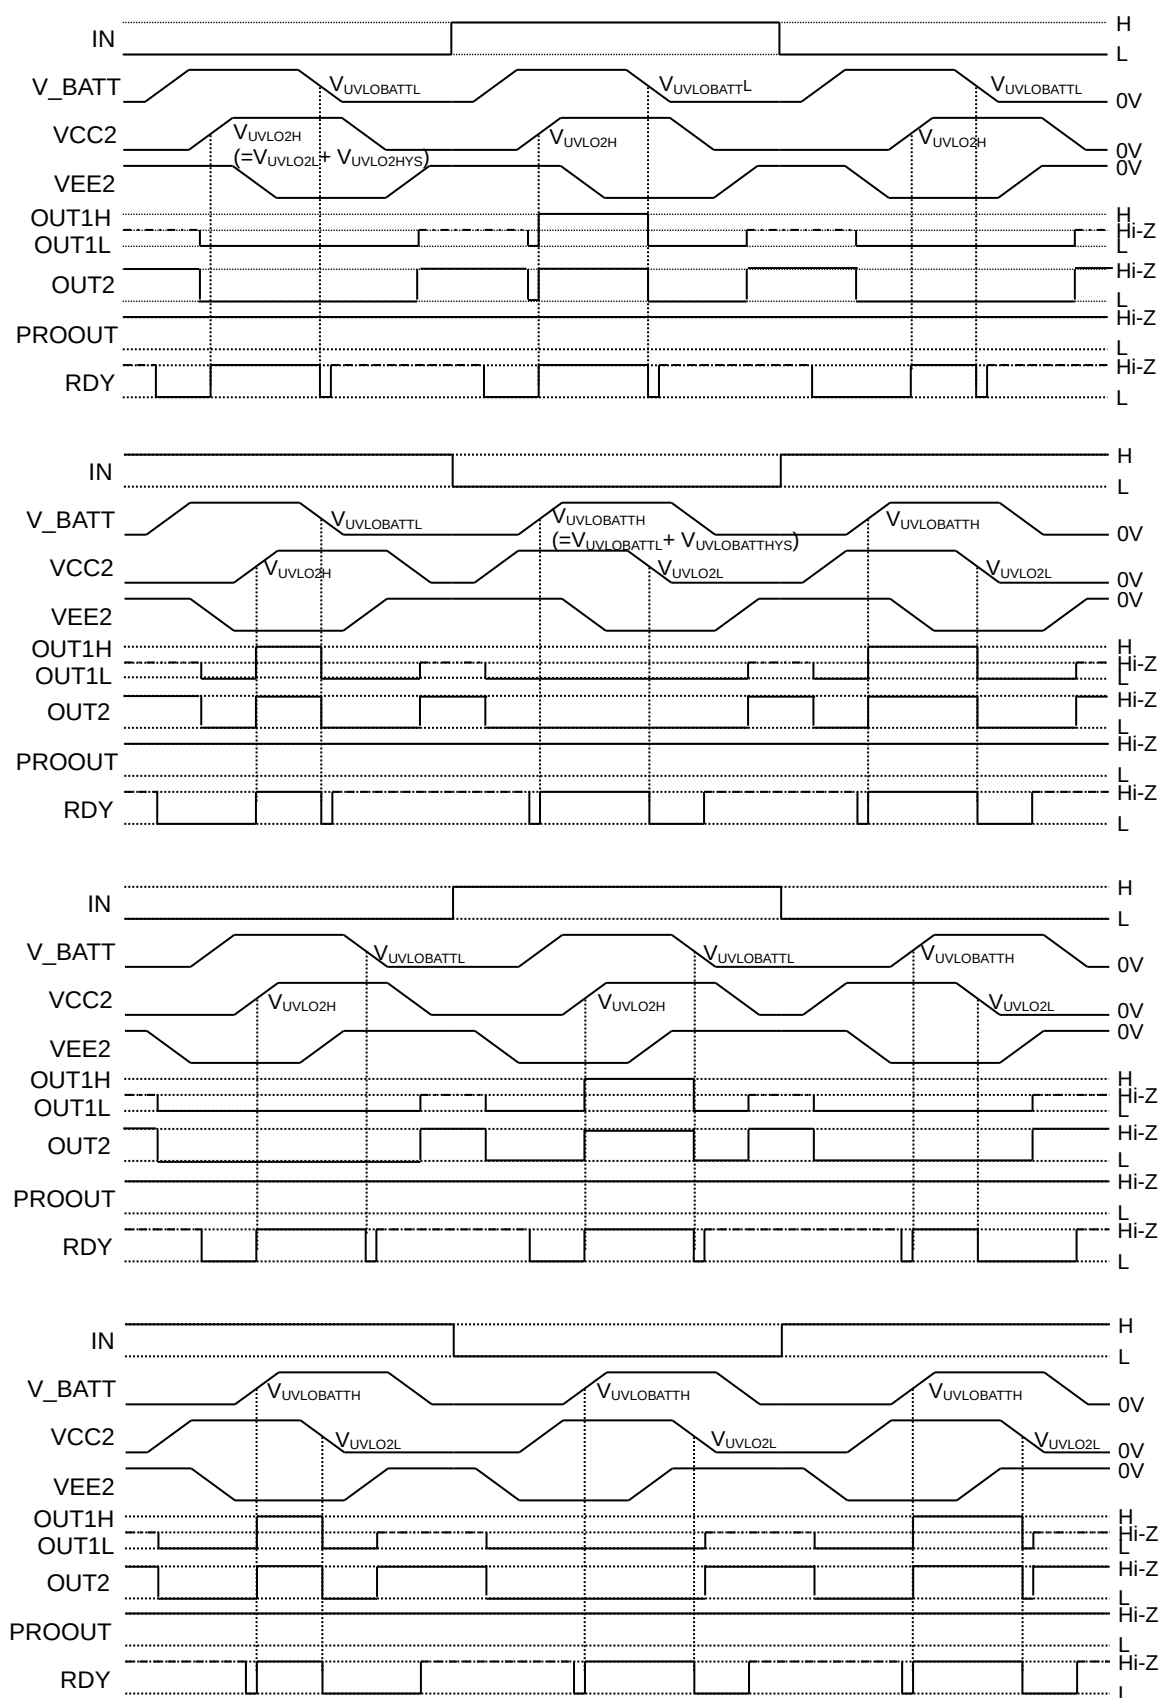

- : Since the VCC2 to VEE2 pin voltage is low and the output MOS does not turn ON, the output pins become Hi-Z conditions.
- : Since the V_BATT to GND1 pin voltage is low and the RDY output MOS does not turn ON, the output pins become Hi-Z conditions.

Figure 16. Power Supply Startup/Shutdown Sequence

Absolute Maximum Ratings

Parameter	Symbol	Limit	Unit
Main Power Supply Voltage	V _{BATT}	-0.3 to +40.0 ^(Note 2)	V
Output-side Positive Supply Voltage	V _{CC2}	-0.3 to +24.0 ^(Note 3)	V
Output-side Negative Supply Voltage	V _{EE2}	-15.0 to +0.3 ^(Note 3)	V
Maximum Difference Between Output-Side Positive and Negative Voltages	V _{MAX2}	30.0	V
INA, INB, ENA Pin Input Voltage	V _{IN}	-0.3 to +7.0 ^(Note 2)	V
MODE Pin Input Voltage	V _{MODE}	-0.3 to +V _{CC2} +0.3 or +24.0 ^(Note 3)	V
DESAT Pin Input Voltage	V _{DESAT}	-0.3 to +V _{CC2} +0.3 or +24.0 ^(Note 3)	V
VTSIN Pin Input Voltage	V _{VTs}	-0.3 to +V _{CC2} +0.3 or +24.0 ^(Note 3)	V
UVLOIN Pin Input Voltage	V _{UVLOIN}	-0.3 to +V _{CC2} +0.3 or +24.0 ^(Note 3)	V
OUT1H, OUT1L Pin Output Current (Peak 10μs)	I _{OUT1PEAK}	5.0 ^(Note 4)	A
OUT2 Pin Output Current (Peak 10μs)	I _{OUT2PEAK}	5.0 ^(Note 4)	A
PROOUT Pin Output Current (Peak 10μs)	I _{PROOUTPEAK}	2.5 ^(Note 4)	A
FLT, RDY Pin Output Current	I _{FLT}	10	mA
FET_G Pin Output Current (Peak 1μs)	I _{FET_GPEAK}	1	A
Storage Temperature Range	T _{stg}	-55 to +150	°C
Maximum Junction Temperature	T _{jmax}	+150	°C

Caution 1: Operating the IC over the absolute maximum ratings may damage the IC. The damage can either be a short circuit between pins or an open circuit between pins and the internal circuitry. Therefore, it is important to consider circuit protection measures, such as adding a fuse, in case the IC is operated over the absolute maximum ratings.

Caution 2: Should by any chance the maximum junction temperature rating be exceeded the rise in temperature of the chip may result in deterioration of the properties of the chip. In case of exceeding this absolute maximum rating, design a PCB boards with thermal resistance taken into consideration by increasing board size and copper area so as not to exceed the maximum junction temperature rating.

(Note 2) Relative to GND1

(Note 3) Relative to GND2

(Note 4) Must not exceed T_{jmax}=150°C

Thermal Resistance^(Note 5)

Parameter	Symbol	Thermal Resistance (Typ)		Unit
		1s ^(Note 7)	2s2p ^(Note 8)	
SSOP-B28W				
Junction to Ambient	θ_{JA}	112.9	64.4	°C/W
Junction to Top Characterization Parameter ^(Note 6)	Ψ_{JT}	34	23	°C/W

(Note 5) Based on JESD51-2A (Still-Air).

(Note 6) The thermal characterization parameter to report the difference between junction temperature and the temperature at the top center of the outside surface of the component package.

(Note 7) Using a PCB board based on JESD51-3.

(Note 8) Using a PCB board based on JESD51-7.

Layer Number of Measurement Board	Material	Board Size
Single	FR-4	114.3mm x 76.2mm x 1.57mm

Top	
Copper Pattern	Thickness
Footprints and Traces	70μm

Layer Number of Measurement Board	Material	Board Size
4 Layers	FR-4	114.3mm x 76.2mm x 1.6mm

Top		2 Internal Layers		Bottom	
Copper Pattern	Thickness	Copper Pattern	Thickness	Copper Pattern	Thickness
Footprints and Traces	70μm	74.2mm x 74.2mm	35μm	74.2mm x 74.2mm	70μm

Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit
Main Power Supply Voltage ^(Note 9)	V _{BATT}	4	12	32	V
Output-side Positive Supply Voltage ^(Note 10)	V _{CC2}	10	15	20	V
Output-side Negative Supply Voltage ^(Note 10)	V _{EE2}	-12	-	0	V
Maximum Difference Between Output-Side Positive and Negative Voltages	V _{MAX2}	10	-	28	V
Switching Frequency for Switching Controller	f _{SW}	100	-	500	kHz
Operating Temperature	T _{opr}	-40	+25	+125	°C

(Note 9) Relative to GND1

(Note 10) Relative to GND2

Insulation Related Characteristics

Parameter	Symbol	Characteristic	Unit
Insulation Resistance (V _{IO} =500V)	R _S	>10 ⁹	Ω
Insulation Withstand Voltage/1min	V _{ISO}	2500	V _{rms}
Insulation Test Voltage/1s	V _{ISO}	3000	V _{rms}

Electrical Characteristics(Unless otherwise specified Ta=-40°C to +125°C, V_{BATT}=4V to 32V, V_{CC2}=UVLO to 20V, V_{EE2}=-12V to 0V)

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
General						
Main Power Supply Circuit Current 1	I _{BATT1}	1.0	1.6	2.2	mA	V _{BATT} =4V
Main Power Supply Circuit Current 2	I _{BATT2}	0.7	1.3	1.9	mA	V _{BATT} =12V
Main Power Supply Circuit Current 3	I _{BATT3}	0.8	1.4	2.0	mA	V _{BATT} =32V
Output-side Circuit Current 1	I _{CC21}	1.0	1.8	2.6	mA	V _{CC2} =14V, OUT1L=L
Output-side Circuit Current 2	I _{CC22}	0.7	1.5	2.3	mA	V _{CC2} =14V, OUT1H=H
Output-side Circuit Current 3	I _{CC23}	1.1	1.9	2.7	mA	V _{CC2} =18V, OUT1L=L
Output-side Circuit Current 4	I _{CC24}	0.8	1.6	2.4	mA	V _{CC2} =18V, OUT1H=H
Output-side Circuit Current 5	I _{CC25}	1.2	2.0	2.8	mA	V _{CC2} =16V, V _{EE2} =-8V, OUT1L=L
Output-side Circuit Current 6	I _{CC26}	0.9	1.7	2.5	mA	V _{CC2} =16V, V _{EE2} =-8V, OUT1H=H
Switching Power Supply Controller						
FET_G Output Voltage H1	V _{FETGH1}	3.8	4.0	4.2	V	4.2V<V _{BATT} ≤32V I _{FET_G} =0A(open)
FET_G Output Voltage H2	V _{FETGH2}	-	V _{BATT} -0.2	V _{BATT}	V	V _{BATT} ≤4.2V I _{FET_G} =0A(open)
FET_G Output Voltage L	V _{FETGL}	0	-	0.3	V	I _{FET_G} =0A(open)
FET_G ON-resistance (Source)	R _{ONGH}	3	6	12	Ω	I _{FET_G} =-10mA
FET_G ON-resistance (Sink)	R _{ONGL}	0.3	0.6	1.3	Ω	I _{FET_G} =10mA
Oscillation Frequency	f _{SW}	182	200	222	kHz	R _{RT} =68kΩ
Soft-start Time	t _{SS}	-	-	50	ms	
FB Pin Threshold Voltage	V _{FB}	1.47	1.50	1.53	V	
FB Pin Input Current	I _{FB}	-0.8	0	+0.8	μA	
COMP Pin Sink Current	I _{COMPSINK}	-160	-80	-40	μA	
COMP Pin Source Current	I _{COMPSource}	40	80	160	μA	
V _{BATT} UVLO ON Voltage	V _{UVLOBATTL}	3.20	3.40	3.60	V	
V _{BATT} UVLO Hysteresis	V _{UVLOBATTHYS}	0.07	0.1	0.13	V	
V _{BATT} UVLO Filtering Time	t _{UVLOBATTFIL}	-	2	-	μs	
Maximum ON DUTY	D _{ONMAX}	-	48	-	%	
Over Voltage Detection Threshold	V _{OVTH}	1.60	1.65	1.70	V	
Under Voltage Detection Threshold	V _{UVTH}	1.23	1.30	1.37	V	
Over Current Detection Threshold	V _{OCTH}	0.17	0.20	0.23	V	
Protection Holding Time	t _{DCDCRLS}	20	40	60	ms	
Logic						
Logic High Level Input Voltage	V _{INH}	2.0	-	5.5	V	INA, INB, ENA
Logic Low Level Input Voltage	V _{INL}	0	-	0.8	V	INA, INB, ENA
Logic Pull-Down Resistance	R _{IND}	25	50	100	kΩ	INA, INB, ENA
Minimum Input Pulse Width	t _{INFIL}	-	-	90	ns	INA, INB
ENA Input Filtering Time	t _{ENAFIL}	-	0.5	0.8	μs	ENA
MODE Low Level Input Voltage	V _{MODEL}	0	-	0.3xV _{CC2}	V	Relative to GND2
MODE High Level Input Voltage	V _{MODEH}	0.7xV _{CC2}	-	V _{CC2}	V	Relative to GND2

Electrical Characteristics – continued

(Unless otherwise specified Ta=-40°C to +125°C, V_{BATT}=4V to 32V, V_{CC2}=UVLO to 20V, V_{EE2}=-12V to 0V)

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Output						
OUT1H ON-resistance (Source)	R _{ONH}	0.50	0.85	1.45	Ω	I _{OUT1H} =-40mA
OUT1L ON-resistance (Sink)	R _{ONL}	0.25	0.45	0.80	Ω	I _{OUT1L} =40mA
OUT1 Maximum Current	I _{OUT1MAX}	3.0	4.5	-	A	V _{CC2} =15V Guaranteed by design
PROOUT ON-resistance	R _{ONPRO}	0.45	0.85	1.55	Ω	I _{PROOUT} =40mA
Turn ON Time	t _{PONA}	40	80	120	ns	INA=PWM, INB=L
	t _{PONB}	40	80	120	ns	INA=H, INB=PWM
Turn OFF Time	t _{POFFA}	35	75	115	ns	INA=PWM, INB=L
	t _{POFFB}	35	75	115	ns	INA=H, INB=PWM
Propagation Distortion	t _{PDISTA}	-25	-5	+15	ns	t _{POFFA} - t _{PONA}
	t _{PDISTB}	-25	-5	+15	ns	t _{POFFB} - t _{PONB}
Rise Time	t _{RISE}	-	50	-	ns	10nF between OUT1-VEE2
Fall Time	t _{FALL}	-	50	-	ns	Guaranteed by design
OUT2 ON-resistance	R _{ON2}	0.25	0.45	0.80	Ω	I _{OUT2} =40mA
OUT2 ON Threshold Voltage	V _{OUT2ON}	1.8	2	2.2	V	Relative to V _{EE2}
Common Mode Transient Immunity	CM	100	-	-	kV/μs	Guaranteed by design
Protection Functions						
Output-side UVLO ON Threshold Voltage (UVLOIN)	V _{UVLOINL}	0.85	0.90	0.95	V	MODE=L
Output-side UVLO Threshold Hysteresis (UVLOIN)	V _{UVLOINHYS}	0.10× V _{UVLOINL}	0.11× V _{UVLOINL}	0.12× V _{UVLOINL}	V	MODE=L
Output-side UVLO ON Voltage	V _{UVLO2L}	10.9	11.5	12.1	V	MODE=H
Output-side UVLO Hysteresis	V _{UVLO2HYS}	0.8	1.2	1.6	V	MODE=H
Output-side UVLO Filtering Time	t _{UVLO2FIL}	6	12	22	μs	
DESAT Charging Current	I _{DESATC}	300	335	370	μA	V _{DESAT} =2V
DESAT Leading Edge Blanking Time	t _{DESATLEB}	0.14	0.20	0.26	μs	Guaranteed by design
DESAT Detection Voltage	V _{DESATDET}	6.0	6.4	6.8	V	Relative to GND2
DESAT Detection Filtering Time	t _{DESATFIL}	0.12	0.2	0.28	μs	
DESAT Detection Delay Time (PROOUT)	t _{DESATPRO}	0.26	0.38	0.50	μs	
DESAT Pin Low Voltage	V _{DESATL}	-	0.1	0.22	V	I _{DESAT} =1mA
Output Delay Difference between PROOUT and FLT	t _{PROFLT}	0.1	0.4	0.7	μs	
Thermal Detection Voltage	V _{TSDDET}	1.62	1.72	1.82	V	Relative to GND2
Thermal Detection Filtering Time	t _{TSFIL}	4	10	30	μs	
Soft Turn Off Release Time	t _{STO}	30	-	110	μs	
FLT Output Low Voltage	V _{FLTL}	-	0.18	0.40	V	I _{FLT} =5mA
Gate State H Detection Threshold Voltage	V _{OSFBH}	4.5	5.0	5.5	V	Relative to GND2
Gate State L Detection Threshold Voltage	V _{OSFBL}	4.0	4.5	5.0	V	Relative to GND2
OSFB Output Filtering Time	t _{OSFBFIL}	4.0	6.2	8.4	μs	
RDY Output Low Voltage	V _{RDYL}	-	0.18	0.40	V	I _{RDY} =5mA

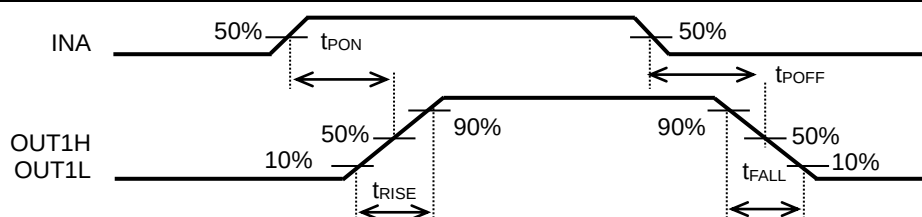


Figure 17. INA to OUT1H/OUT1L Timing Chart

UL1577 Ratings Table (pending)

Following values will be described in UL Report.

Parameter	Value	Unit	Conditions
Side 1 (Input Side) Circuit Current	1.3	mA	$V_{BATT}=12V$, OUT1L=L
Side 2 (Output Side) Circuit Current	2	mA	$V_{CC2}=16V$, $V_{EE2}=-8V$, OUT1L=L
Side 1 (Input Side) Consumption Power	15.6	mW	$V_{BATT}=12V$, OUT1L=L
Side 2 (Output Side) Consumption Power	48	mW	$V_{CC2}=16V$, $V_{EE2}=-8V$, OUT1L=L
Isolation Voltage	2500	Vrms	
Maximum Operating (Ambient) Temperature	125	°C	
Maximum Junction Temperature	150	°C	
Maximum Storage Temperature	150	°C	
Maximum Data Transmission Rate	5.5	MHz	

Typical Performance Curves

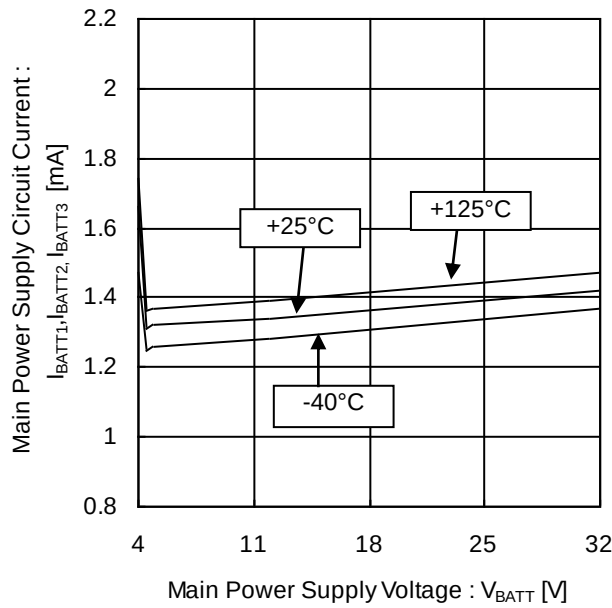


Figure 18. Main Power Supply Circuit Current vs Main Power Supply Voltage

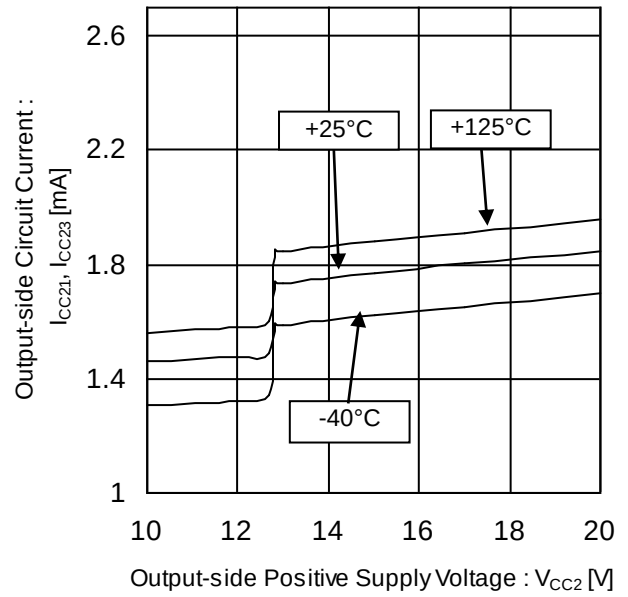


Figure 19. Output-side Circuit Current vs Output-side Positive Supply Voltage (MODE=H, $V_{EE2}=0V$, OUT1=L)

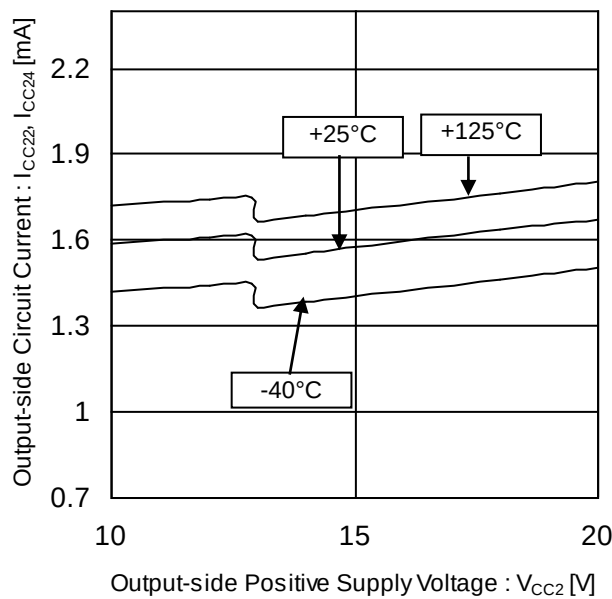


Figure 20. Output-side Circuit Current vs Output-side Positive Supply Voltage (MODE=H, $V_{EE2}=0V$, OUT1=H)

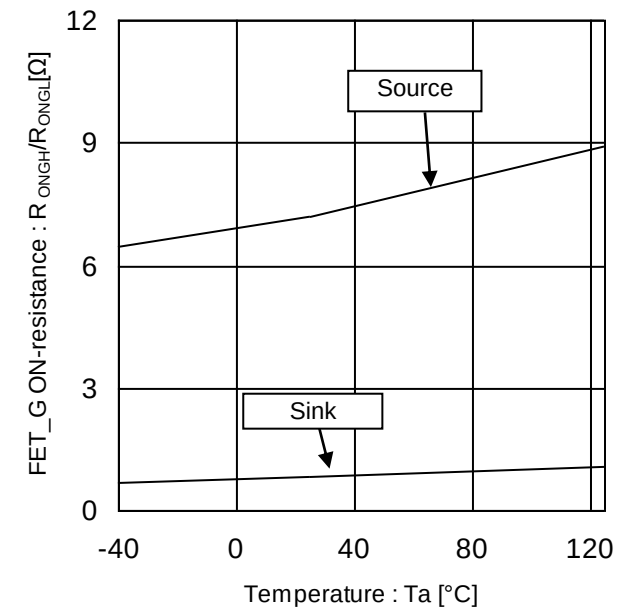


Figure 21. FET_G ON-resistance vs Temperature (Source /Sink)

Typical Performance Curves – continued

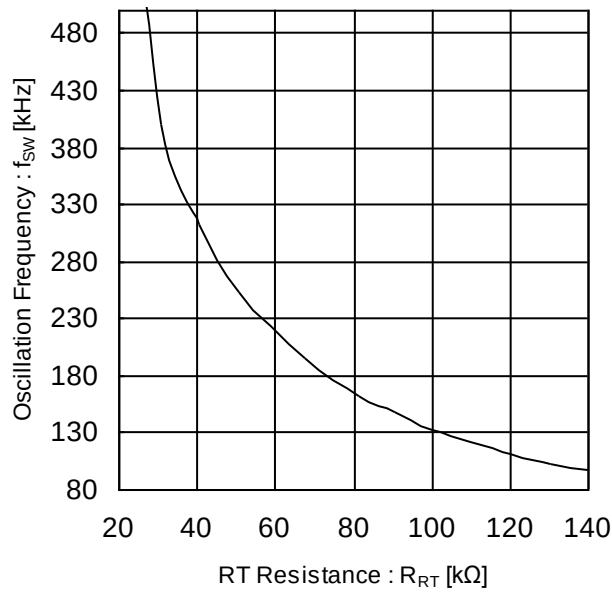


Figure 22. Oscillation Frequency vs RT Resistance

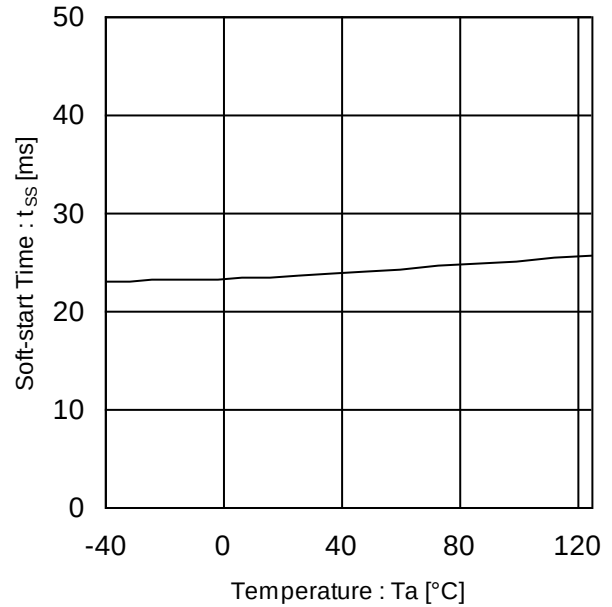


Figure 23. Soft-start Time vs Temperature

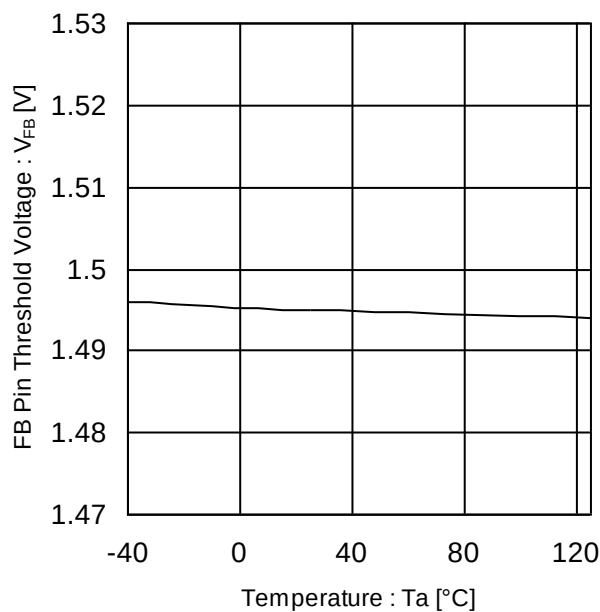


Figure 24. FB Pin Threshold Voltage vs Temperature

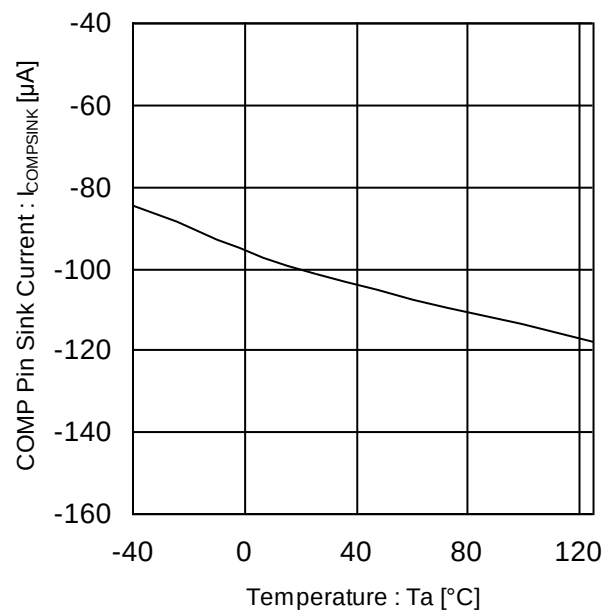


Figure 25. COMP Pin Sink Current vs Temperature

Typical Performance Curves – continued

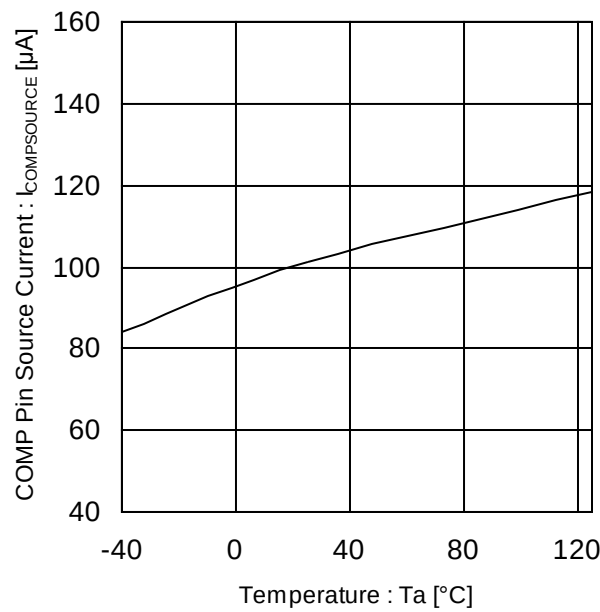


Figure 26. COMP Pin Source Current vs Temperature

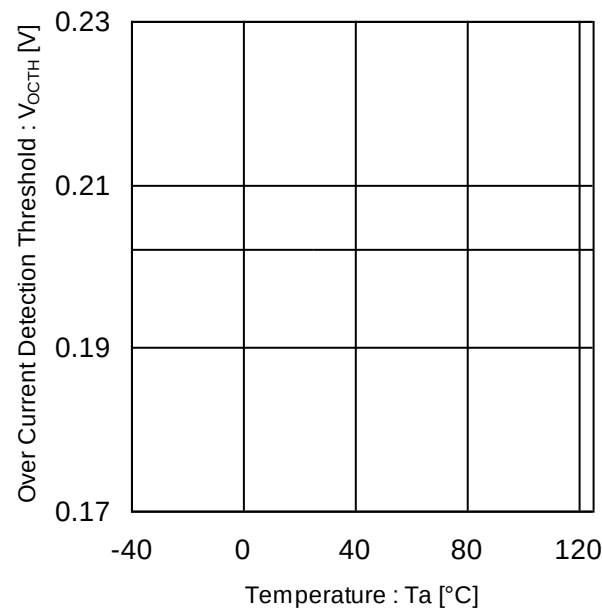


Figure 27. Over Current Detection Threshold vs Temperature

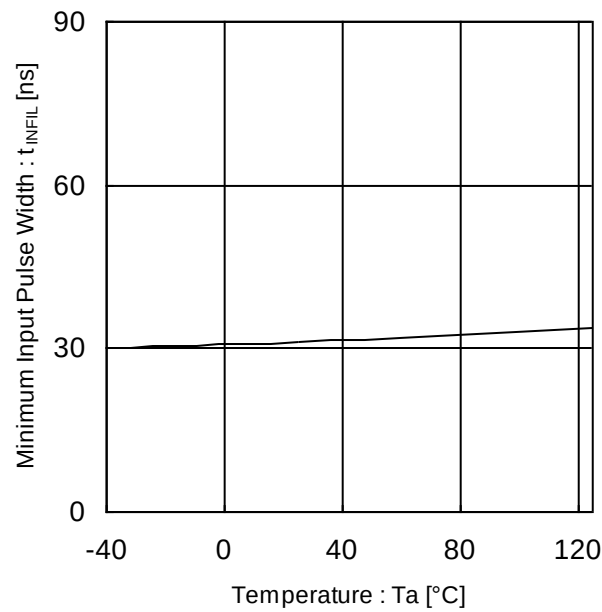


Figure 28. Logic Input Filtering Time vs Temperature (L pulse)

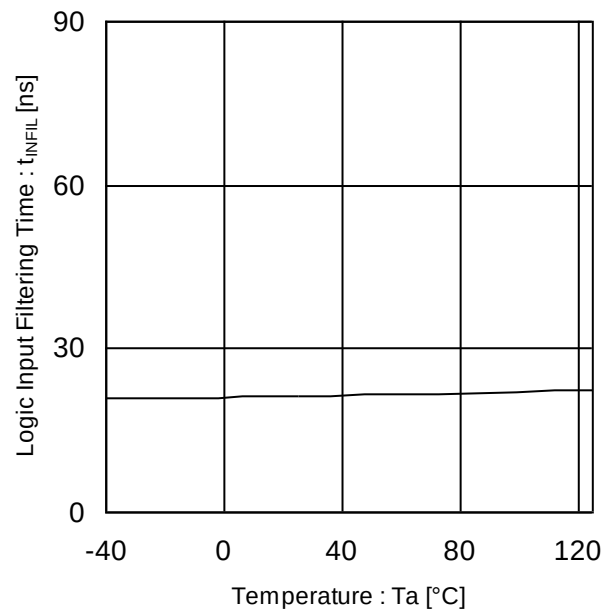


Figure 29. Logic Input Filtering Time vs Temperature (H pulse)

Typical Performance Curves – continued

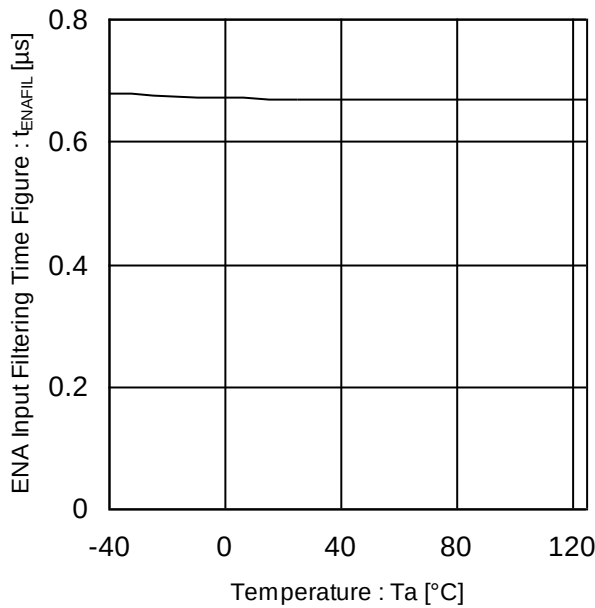


Figure 30. ENA Input Filtering Time Figure vs Temperature

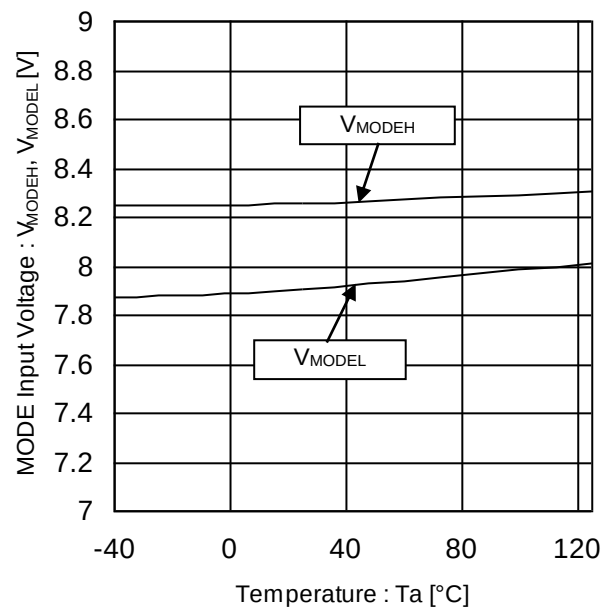


Figure 31. MODE Input Voltage vs Temperature ($V_{CC2}=14V$)

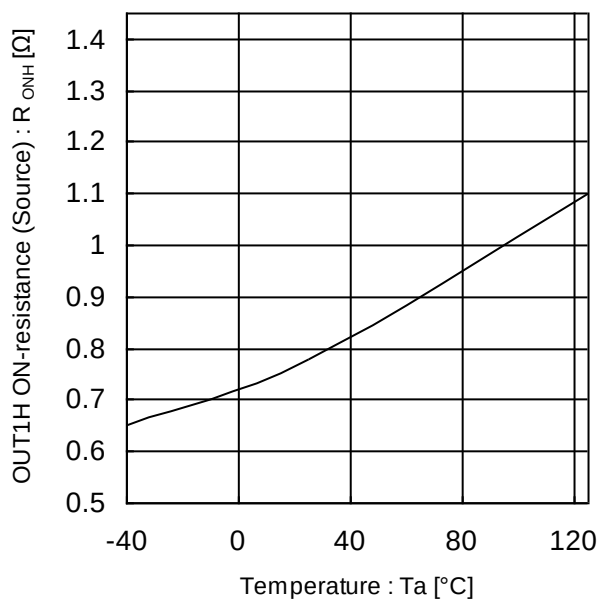


Figure 32. OUT1H ON-resistance (Source) vs Temperature ($I_{OUT1H}=-40mA$)

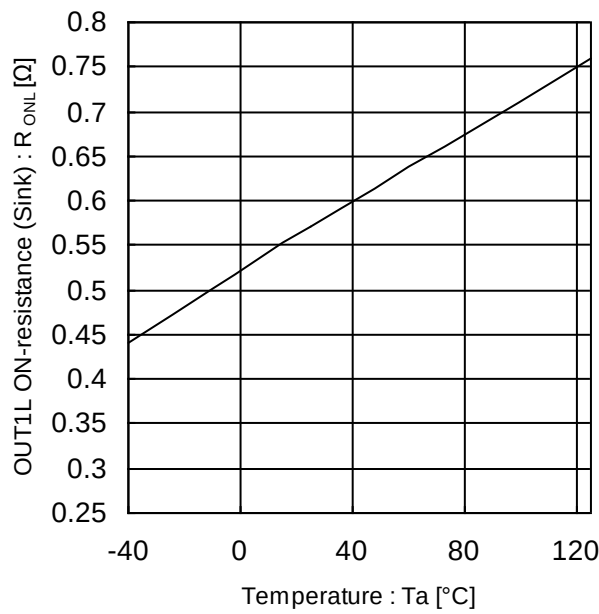


Figure 33. OUT1L ON-resistance (Sink) vs Temperature ($I_{OUT1L}=40mA$)

Typical Performance Curves – continued

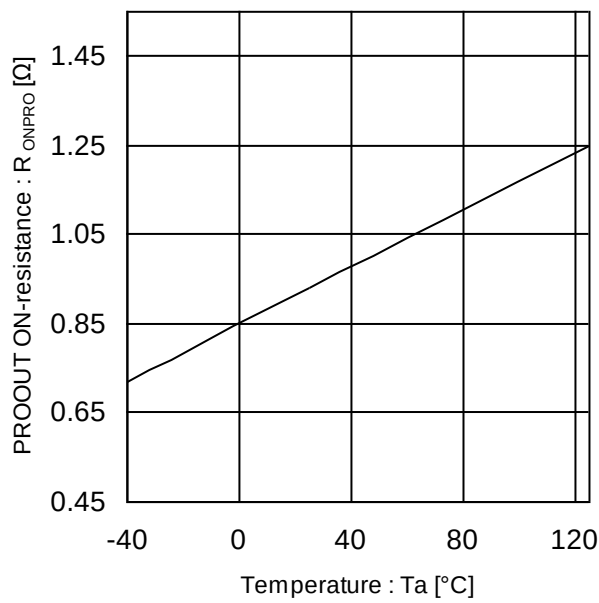


Figure 34. PROOUT ON-resistance vs Temperature ($I_{PROOUT}=40mA$)

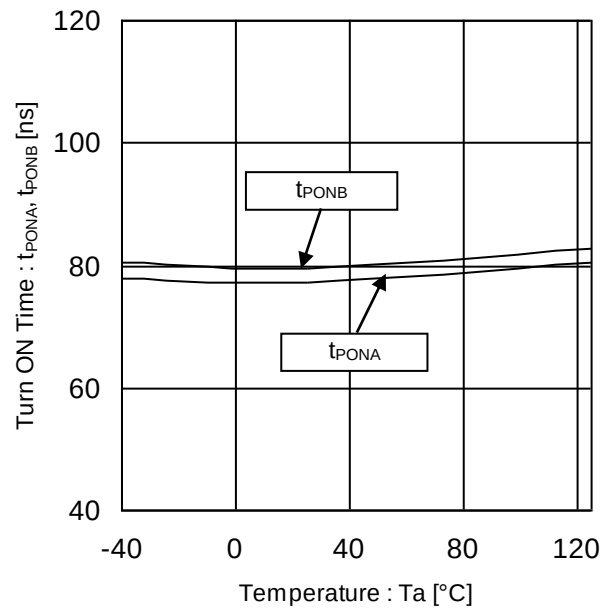


Figure 35. Turn ON Time vs Temperature

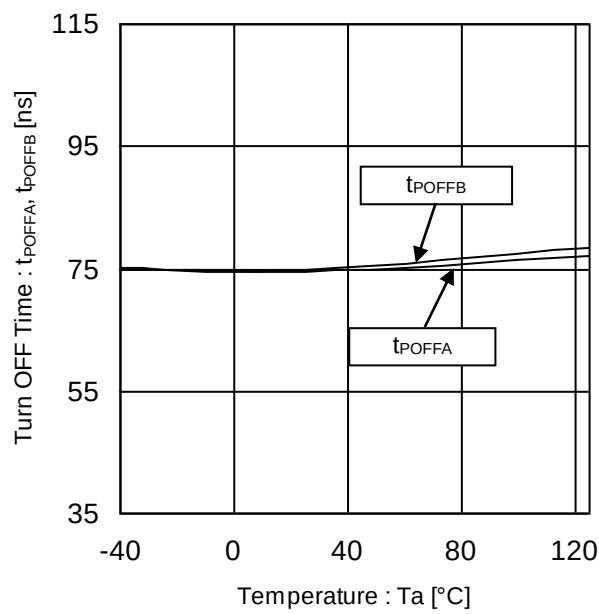


Figure 36. Turn OFF Time vs Temperature

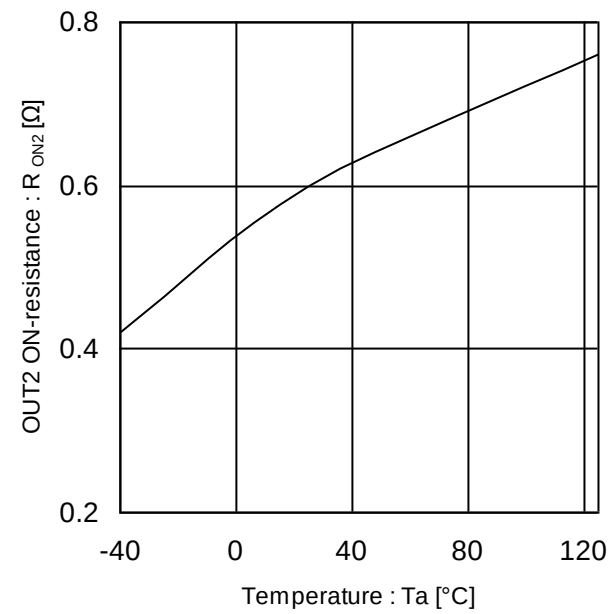


Figure 37. OUT2 ON-resistance vs Temperature ($I_{OUT2}=40mA$)

Typical Performance Curves – continued

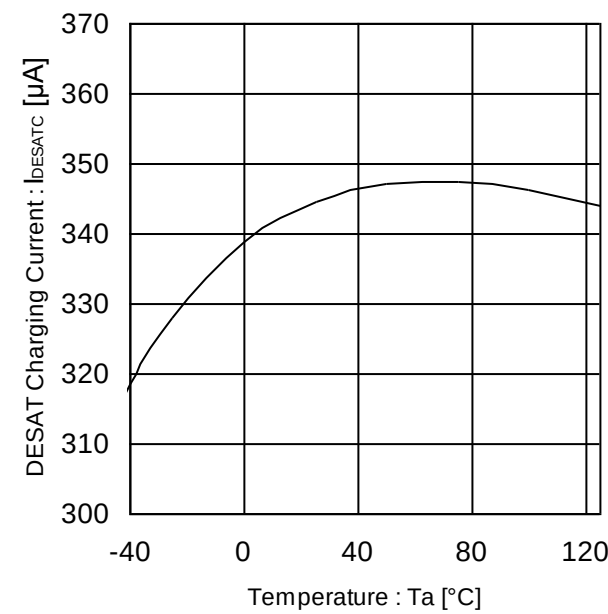


Figure 38. DESAT Charging Current vs Temperature

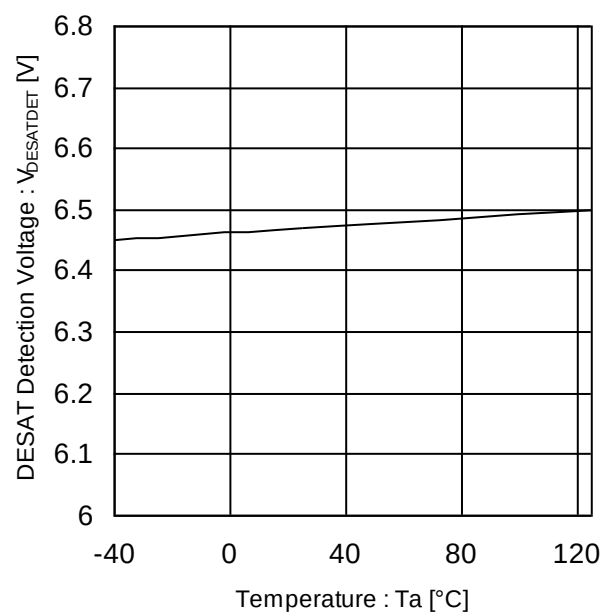


Figure 39. DESAT Detection Voltage vs Temperature

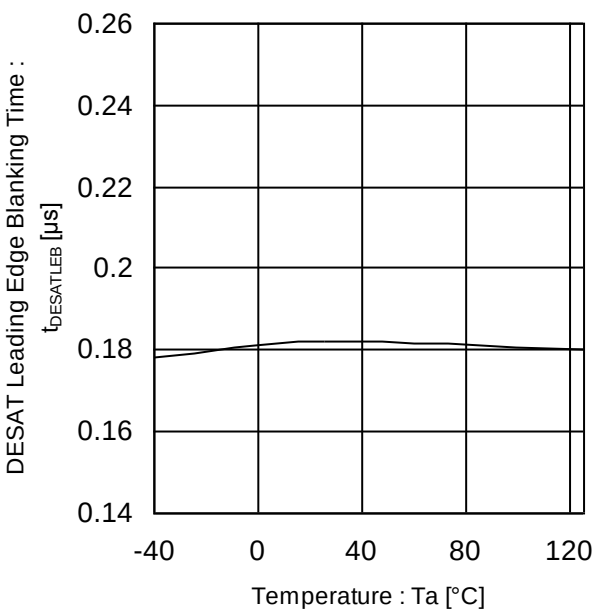


Figure 40. DESAT Leading Edge Blanking Time vs Temperature

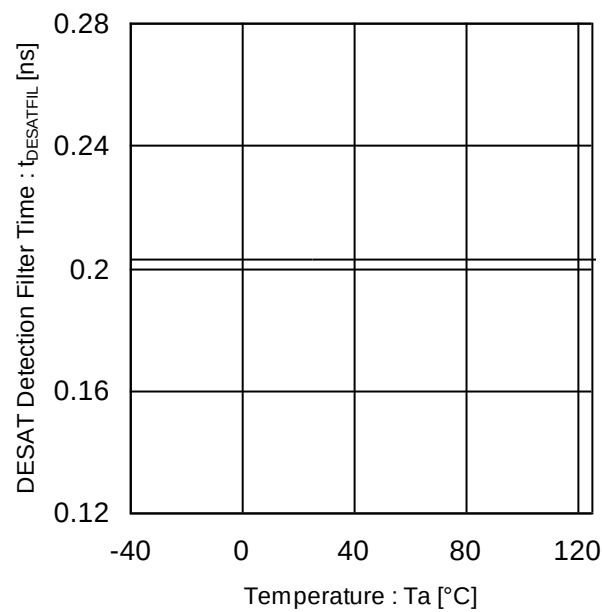


Figure 41. DESAT Detection Filter Time vs Temperature

Typical Performance Curves – continued

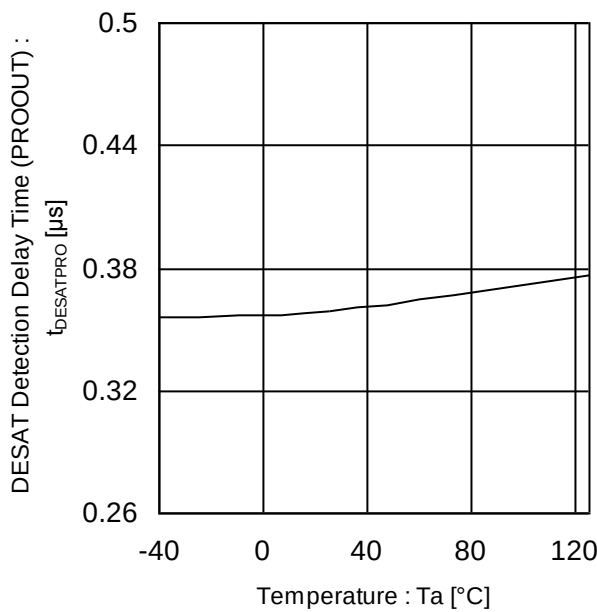


Figure 42. DESAT Detection Delay Time (PROOUT) vs Temperature

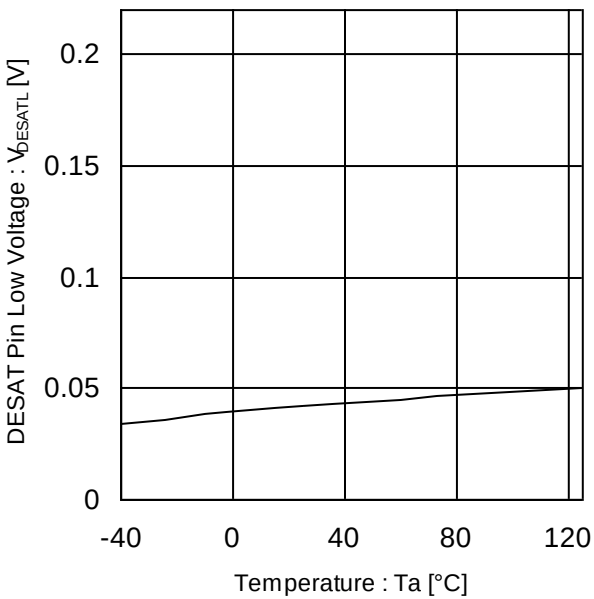


Figure 43. DESAT Pin Low Voltage vs Temperature

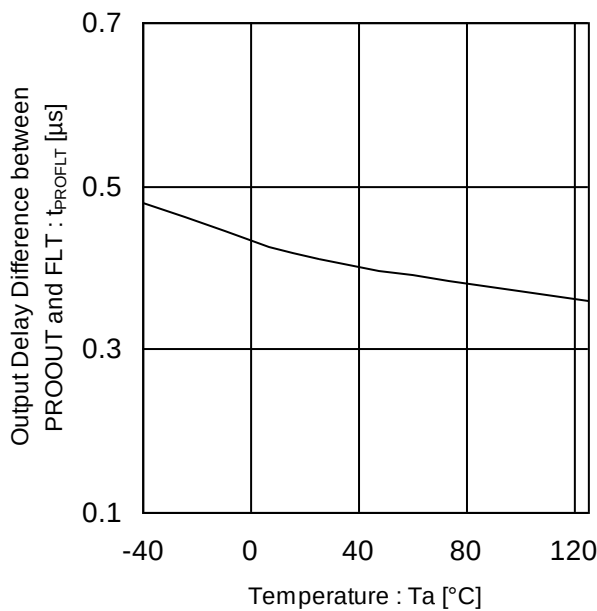


Figure 44. Output Delay Difference between PROOUT and FLT vs Temperature

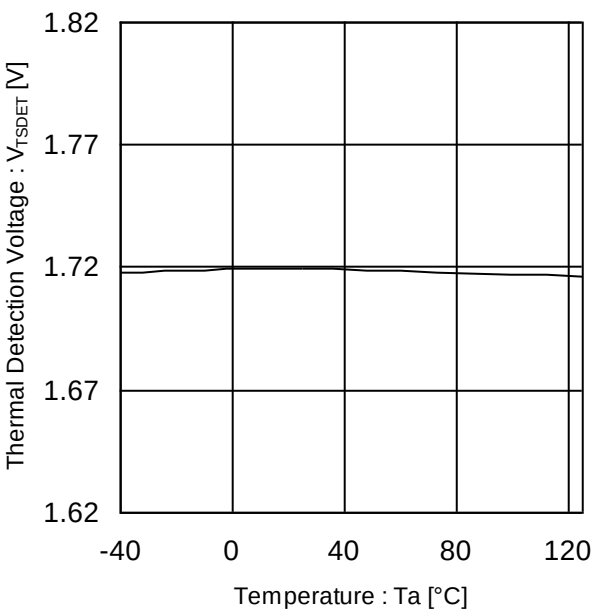


Figure 45. Thermal Detection Voltage vs Temperature

Selection of Components Externally Connected

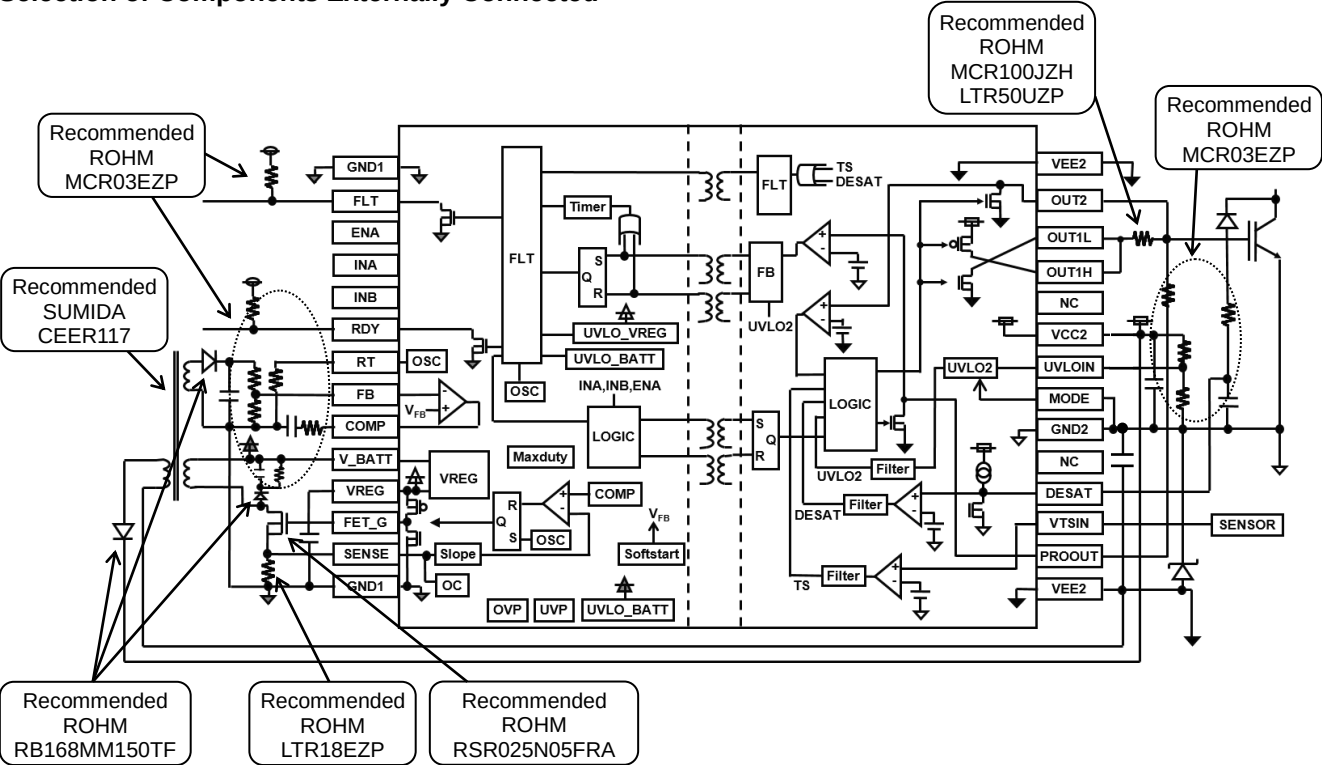


Figure 46. Recommended External Parts

I/O Equivalence Circuits

Pin No.	Pin Name	Input Output Equivalence Circuit Diagram
	Pin Function	
2	PROOUT	
	Soft turn-off pin/Gate voltage input pin	
3	VTSIN	
	Temperature sensor voltage input pin	
4	DESAT	
	DESAT detection pin	
7	MODE	
	Mode selection pin of output-side UVLO	
8	UVLOIN	
	Output-side UVLO setting input pin	





I/O Equivalence Circuits – continued

Pin No.	Pin Name	Input Output Equivalence Circuit Diagram
	Pin Function	
11	OUT1H	
	Source side output pin	
12	OUT1L	
	Sink side output pin	
13	OUT2	
	Output pin for Miller Clamp	
16	FLT	
	Fault output pin	
20	RDY	
	Ready output pin	
17	ENA	
	Input enabling signal input pin	

I/O Equivalence Circuits – continued

Pin No.	Name	Input Output Equivalence Circuit Diagram
	Function	
18	INA	
	Control input pin A	
19	INB	
	Control input pin B	
21	RT	
	Switching frequency setting pin for switching controller	
22	FB	
	Error amplifier inverting input pin for switching controller	

I/O Equivalence Circuits – continued

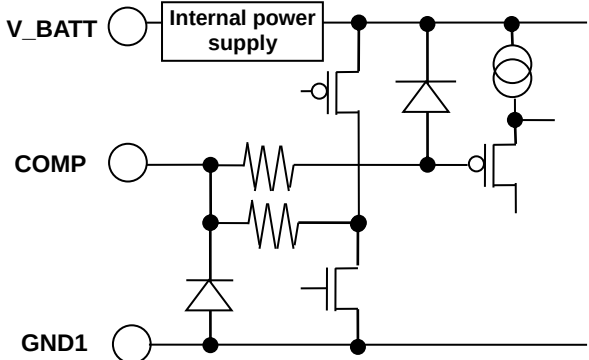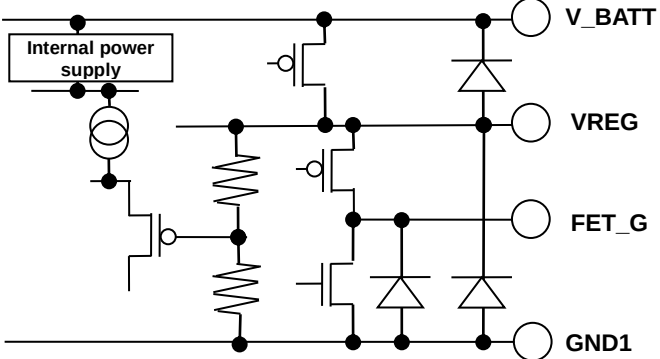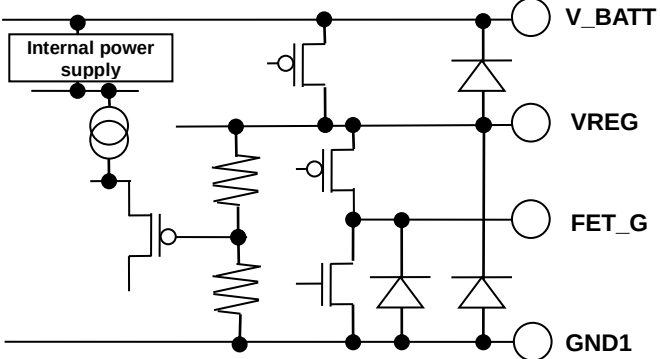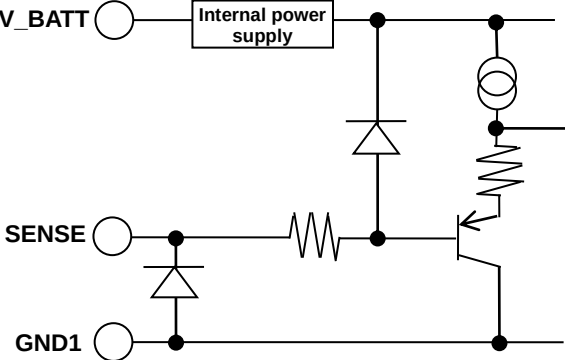Pin No.	Name	Input Output Equivalence Circuit Diagram
	Function	
23	COMP	
	Error amplifier output pin for switching controller	
25	VREG	
	Input-side internal power supply pin	
26	FET_G	
	MOS FET control pin for switching controller	
27	SENSE	
	Current detection pin for switching controller	

Operational Notes

1. Reverse Connection of Power Supply

Connecting the power supply in reverse polarity can damage the IC. Take precautions against reverse polarity when connecting the power supply, such as mounting an external diode between the power supply and the IC's power supply pins.

2. Power Supply Lines

Design the PCB layout pattern to provide low impedance supply lines. Separate the ground and supply lines of the digital and analog blocks to prevent noise in the ground and supply lines of the digital block from affecting the analog block. Furthermore, connect a capacitor to ground at all power supply pins. Consider the effect of temperature and aging on the capacitance value when using electrolytic capacitors.

3. Ground Voltage

Ensure that no pins are at a voltage below that of the ground pin at any time, even during transient condition.

4. Ground Wiring Pattern

When using both small-signal and large-current ground traces, the two ground traces should be routed separately but connected to a single ground at the reference point of the application board to avoid fluctuations in the small-signal ground caused by large currents. Also ensure that the ground traces of external components do not cause variations on the ground voltage. The ground lines must be as short and thick as possible to reduce line impedance.

5. Recommended Operating Conditions

The function and operation of the IC are guaranteed within the range specified by the recommended operating conditions. The characteristic values are guaranteed only under the conditions of each item specified by the electrical characteristics.

6. Inrush Current

When power is first supplied to the IC, it is possible that the internal logic may be unstable and inrush current may flow instantaneously due to the internal powering sequence and delays, especially if the IC has more than one power supply. Therefore, give special consideration to power coupling capacitance, power wiring, width of ground wiring, and routing of connections.

7. Operation Under Strong Electromagnetic Field

Operating the IC in the presence of a strong electromagnetic field may cause the IC to malfunction.

8. Testing on Application Boards

When testing the IC on an application board, connecting a capacitor directly to a low-impedance output pin may subject the IC to stress. Always discharge capacitors completely after each process or step. The IC's power supply should always be turned off completely before connecting or removing it from the test setup during the inspection process. To prevent damage from static discharge, ground the IC during assembly and use similar precautions during transport and storage.

Operational Notes – continued

9. Inter-pin Short and Mounting Errors

Ensure that the direction and position are correct when mounting the IC on the PCB. Incorrect mounting may result in damaging the IC. Avoid nearby pins being shorted to each other especially to ground, power supply and output pin. Inter-pin shorts could be due to many reasons such as metal particles, water droplets (in very humid environment) and unintentional solder bridge deposited in between pins during assembly to name a few.

10. Unused Input Pins

Input pins of an IC are often connected to the gate of a MOS transistor. The gate has extremely high impedance and extremely low capacitance. If left unconnected, the electric field from the outside can easily charge it. The small charge acquired in this way is enough to produce a significant effect on the conduction through the transistor and cause unexpected operation of the IC. So unless otherwise specified, unused input pins should be connected to the power supply or ground line.

11. Regarding the Input Pin of the IC

This IC contains P⁺ isolation and P substrate layers between adjacent elements in order to keep them isolated. P-N junctions are formed at the intersection of the P layers with the N layers of other elements, creating a parasitic diode or transistor. For example (refer to figure below):

When GND > Pin A and GND > Pin B, the P-N junction operates as a parasitic diode.

When GND > Pin B, the P-N junction operates as a parasitic transistor.

Parasitic diodes inevitably occur in the structure of the IC. The operation of parasitic diodes can result in mutual interference among circuits, operational faults, or physical damage. Therefore, conditions that cause these diodes to operate, such as applying a voltage lower than the GND voltage to an input pin (and thus to the P substrate) should be avoided.

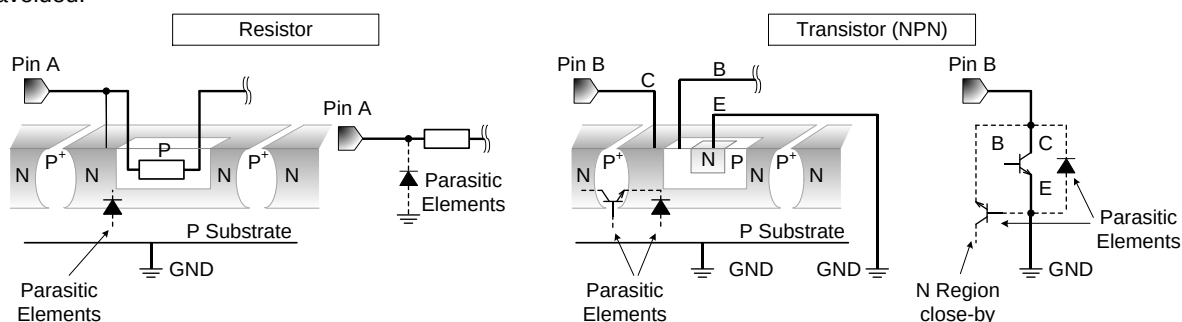


Figure 47. Example of IC structure

12. Ceramic Capacitor

When using a ceramic capacitor, determine a capacitance value considering the change of capacitance with temperature and the decrease in nominal capacitance due to DC bias and others.


13. Area of Safe Operation (ASO)

Operate the IC such that the output voltage, output current, and the maximum junction temperature rating are all within the Area of Safe Operation (ASO).


Ordering Information

B M 6 0 0 5 2 A F V										-	C E 2		
Part Number										Package FV: SSOP-B28W	Rank C:Automotive Packaging and forming specification E2: Embossed tape and reel		

Marking Diagram

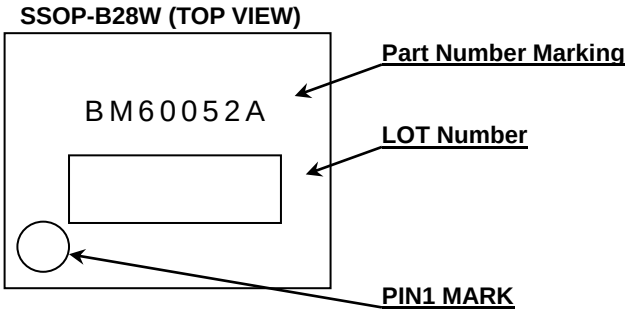

Physical Dimension and Packing Information

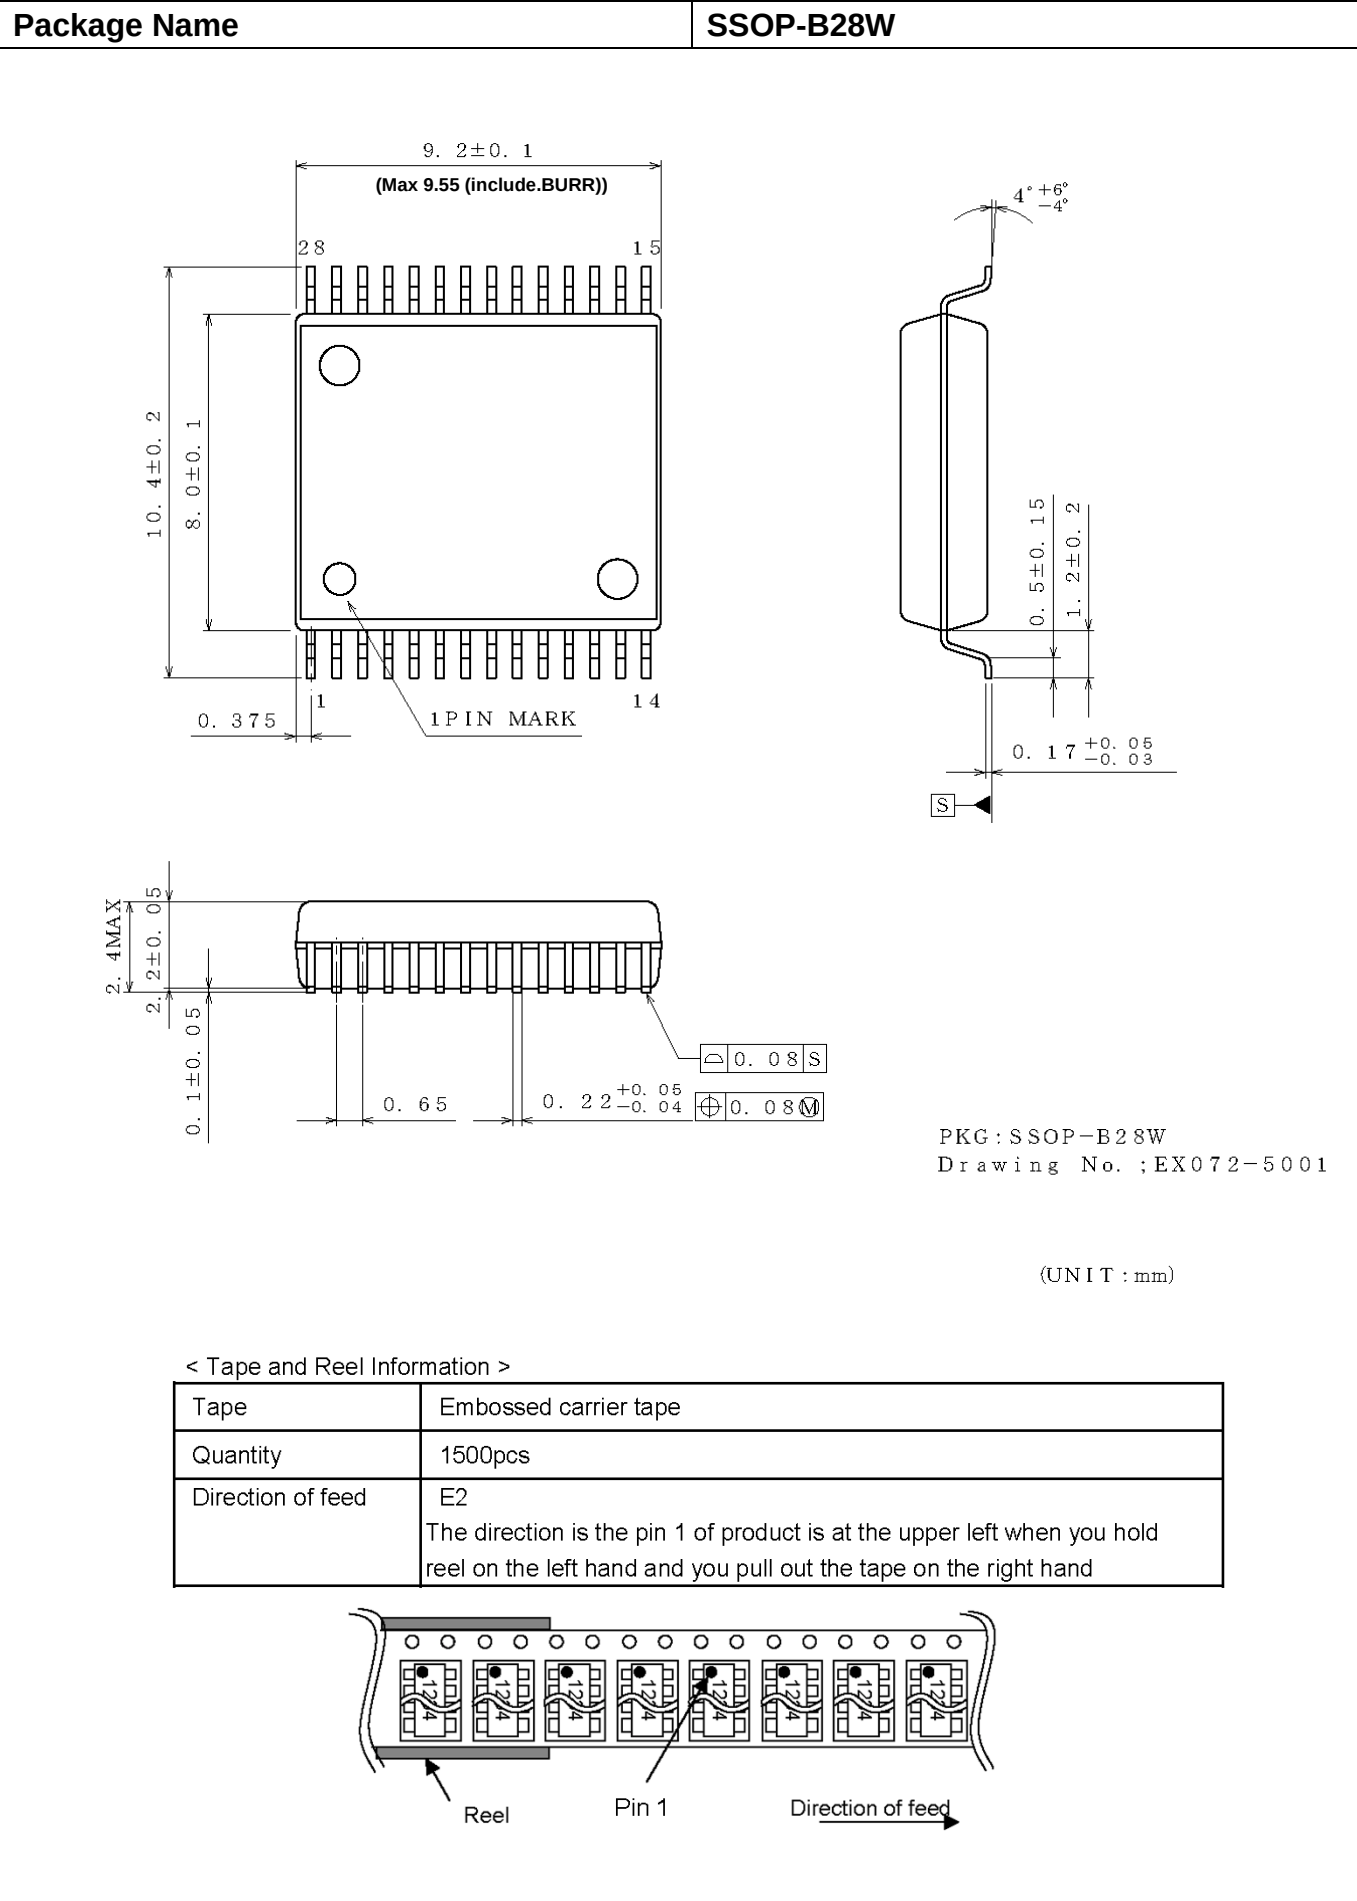

Revision History

Date	Revision	Changes
15.May.2018	001	New Release

Notice

Precaution on using ROHM Products

1. If you intend to use our Products in devices requiring extremely high reliability (such as medical equipment ^(Note 1), aircraft/spacecraft, nuclear power controllers, etc.) and whose malfunction or failure may cause loss of human life, bodily injury or serious damage to property ("Specific Applications"), please consult with the ROHM sales representative in advance. Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of any ROHM's Products for Specific Applications.

(Note1) Medical Equipment Classification of the Specific Applications

JAPAN	USA	EU	CHINA
CLASS III	CLASS III	CLASS II b	CLASS III
CLASS IV		CLASS III	

2. ROHM designs and manufactures its Products subject to strict quality control system. However, semiconductor products can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against the physical injury, damage to any property, which a failure or malfunction of our Products may cause. The following are examples of safety measures:
 - [a] Installation of protection circuits or other protective devices to improve system safety
 - [b] Installation of redundant circuits to reduce the impact of single or multiple circuit failure
3. Our Products are not designed under any special or extraordinary environments or conditions, as exemplified below. Accordingly, ROHM shall not be in any way responsible or liable for any damages, expenses or losses arising from the use of any ROHM's Products under any special or extraordinary environments or conditions. If you intend to use our Products under any special or extraordinary environments or conditions (as exemplified below), your independent verification and confirmation of product performance, reliability, etc, prior to use, must be necessary:
 - [a] Use of our Products in any types of liquid, including water, oils, chemicals, and organic solvents
 - [b] Use of our Products outdoors or in places where the Products are exposed to direct sunlight or dust
 - [c] Use of our Products in places where the Products are exposed to sea wind or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, and NO₂
 - [d] Use of our Products in places where the Products are exposed to static electricity or electromagnetic waves
 - [e] Use of our Products in proximity to heat-producing components, plastic cords, or other flammable items
 - [f] Sealing or coating our Products with resin or other coating materials
 - [g] Use of our Products without cleaning residue of flux (even if you use no-clean type fluxes, cleaning residue of flux is recommended); or Washing our Products by using water or water-soluble cleaning agents for cleaning residue after soldering
 - [h] Use of the Products in places subject to dew condensation
4. The Products are not subject to radiation-proof design.
5. Please verify and confirm characteristics of the final or mounted products in using the Products.
6. In particular, if a transient load (a large amount of load applied in a short period of time, such as pulse. is applied, confirmation of performance characteristics after on-board mounting is strongly recommended. Avoid applying power exceeding normal rated power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.
7. De-rate Power Dissipation depending on ambient temperature. When used in sealed area, confirm that it is the use in the range that does not exceed the maximum junction temperature.
8. Confirm that operation temperature is within the specified range described in the product specification.
9. ROHM shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.

Precaution for Mounting / Circuit board design

1. When a highly active halogenous (chlorine, bromine, etc.) flux is used, the residue of flux may negatively affect product performance and reliability.
2. In principle, the reflow soldering method must be used on a surface-mount products, the flow soldering method must be used on a through hole mount products. If the flow soldering method is preferred on a surface-mount products, please consult with the ROHM representative in advance.

For details, please refer to ROHM Mounting specification

Precautions Regarding Application Examples and External Circuits

1. If change is made to the constant of an external circuit, please allow a sufficient margin considering variations of the characteristics of the Products and external components, including transient characteristics, as well as static characteristics.
2. You agree that application notes, reference designs, and associated data and information contained in this document are presented only as guidance for Products use. Therefore, in case you use such information, you are solely responsible for it and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of such information.

Precaution for Electrostatic

This Product is electrostatic sensitive product, which may be damaged due to electrostatic discharge. Please take proper caution in your manufacturing process and storage so that voltage exceeding the Products maximum rating will not be applied to Products. Please take special care under dry condition (e.g. Grounding of human body / equipment / solder iron, isolation from charged objects, setting of ionizer, friction prevention and temperature / humidity control).

Precaution for Storage / Transportation

1. Product performance and soldered connections may deteriorate if the Products are stored in the places where:
 - [a] the Products are exposed to sea winds or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, and NO₂
 - [b] the temperature or humidity exceeds those recommended by ROHM
 - [c] the Products are exposed to direct sunshine or condensation
 - [d] the Products are exposed to high Electrostatic
2. Even under ROHM recommended storage condition, solderability of products out of recommended storage time period may be degraded. It is strongly recommended to confirm solderability before using Products of which storage time is exceeding the recommended storage time period.
3. Store / transport cartons in the correct direction, which is indicated on a carton with a symbol. Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.
4. Use Products within the specified time after opening a humidity barrier bag. Baking is required before using Products of which storage time is exceeding the recommended storage time period.

Precaution for Product Label

A two-dimensional barcode printed on ROHM Products label is for ROHM's internal use only.

Precaution for Disposition

When disposing Products please dispose them properly using an authorized industry waste company.

Precaution for Foreign Exchange and Foreign Trade act

Since concerned goods might be fallen under listed items of export control prescribed by Foreign exchange and Foreign trade act, please consult with ROHM in case of export.

Precaution Regarding Intellectual Property Rights

1. All information and data including but not limited to application example contained in this document is for reference only. ROHM does not warrant that foregoing information or data will not infringe any intellectual property rights or any other rights of any third party regarding such information or data.
2. ROHM shall not have any obligations where the claims, actions or demands arising from the combination of the Products with other articles such as components, circuits, systems or external equipment (including software).
3. No license, expressly or implied, is granted hereby under any intellectual property rights or other rights of ROHM or any third parties with respect to the Products or the information contained in this document. Provided, however, that ROHM will not assert its intellectual property rights or other rights against you or your customers to the extent necessary to manufacture or sell products containing the Products, subject to the terms and conditions herein.

Other Precaution

1. This document may not be reprinted or reproduced, in whole or in part, without prior written consent of ROHM.
2. The Products may not be disassembled, converted, modified, reproduced or otherwise changed without prior written consent of ROHM.
3. In no event shall you use in any way whatsoever the Products and the related technical information contained in the Products or this document for any military purposes, including but not limited to, the development of mass-destruction weapons.
4. The proper names of companies or products described in this document are trademarks or registered trademarks of ROHM, its affiliated companies or third parties.

General Precaution

1. Before you use our Products, you are requested to carefully read this document and fully understand its contents. ROHM shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any ROHM's Products against warning, caution or note contained in this document.
2. All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using ROHM's Products, please confirm the latest information with a ROHM sales representative.
3. The information contained in this document is provided on an "as is" basis and ROHM does not warrant that all information contained in this document is accurate and/or error-free. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties resulting from inaccuracy or errors of or concerning such information.