


F161, Film, Metallized Polyester Stacked, Automotive Grade, 0.1 uF, 10%, 63 VAC, 100 VDC, 85C, 2220, 4mm

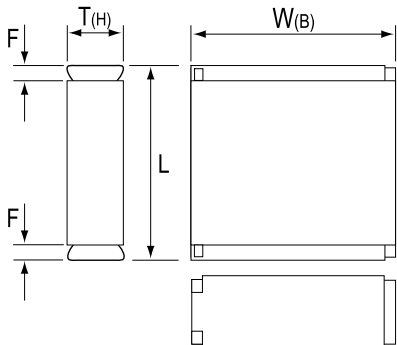

Note: '()' correspond to the letters used in the product bulletin

General Information	
Supplier:	KEMET
Series:	F161
Dielectric:	Metallized Polyester Stacked
Style:	SMD Chip
Features:	Automotive Grade
RoHS:	Yes
Qualifications:	AEC-Q200
AEC-Q200:	Yes
Miscellaneous:	This Capacitor Is Currently Under Development, Please Contact Kemet For Availability

Dimensions	
Chip Size	2220
L	5.7mm +/-0.2mm
W	5mm +/-0.2mm
T	4mm +/-0.2mm
F	0.5mm NOM

Specifications	
Capacitance:	0.1 uF
Capacitance Tolerance:	10%
Voltage AC:	63 VAC
Voltage DC:	100 VDC
Temperature Range:	-55/+125C
Rated Temperature:	85C
Dissipation Factor:	0.8% 1kHz, 1.2% 10kHz, 2.5% 100kHz
Insulation Resistance:	1 GOhms
Max dV/dt:	30 V/us

Packaging Specifications	
Packaging:	T&R
Packaging Quantity:	2100