

NOTES:

1. MATERIAL

1.1 HDMI CABLE: [(7/0.12BC*1P+7/0.12BC+AM)*5PCS+7/0.12BC*4C+AM
+7/0.12BC+128/0.12ALM+BLACK PVC JACKET.

OD: 7.3 ± 0.2 MM

CABLE MARKING: E324703 AWM STYLE 20276 80°C 30V HIGH SPEED

HDMI® CABLE WITH ETHERNET

1.2 HDMI TYPE A MALE: BLACK INSULATION,
GOLD PLATED CONTACTS, GOLD PLATED SHELL

1.3 ALL HOOD: MOLDED BLACK PVC AND U ZINC ALLOY SHELL ASSEMBLY (SILVER).

2. ELECTRICAL

2.1 100% OPEN AND SHORT TEST.

2.2 CONDUCTOR RESISTANCE: 8 OHMS MAX.


2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN.

2.4 HI-POT: DC200V/0.01S.

2.5 HDTV-DVD TEST : 1080I.

3. PACKAGING: A PC/PE-BAG PACKAGING.

4. ALL MATERIALS ARE REACH COMPLIANT.

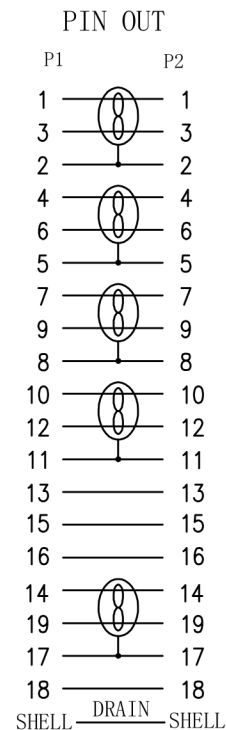

P/N

CUSTOMER	L
AV22528	10000 ± 150mm
AV22529	15000 ± 200mm

LENGTH TOLERANCE: X. ± 0.5 .X ± 0.2 .XX ± 0.1	SCALE: FREE	CUS. NAME: CPC	ENG:		
ANGLE TOLERANCE: X° ± 3° .X° ± 1°	UNIT: mm		PRODUCT NO: N/A	CUSTOMER NO: P/N	CHECKED:
VERSION: 00	PAGE: 1/1	DRAWING NO: HF2574	PRODUCT DESCRIPTION: HDMI AM/AM		APPROVED:

00	NEW ISSUE	2019-04-25
REV.	MODIFY DESCRIPTION	DATE