

XBKP50100D10M

predetermining subtracting counter - mechanical 5
digit display - 24 V DC



Main

Range of product	Zelio Count
Product or component type	Preselection counter
Display type	Mechanical
Size	75 x 60 mm
Display digits	5 digit(s)
Counting frequency	25 Hz
Reset	Manual
Counting capacity	0...99999
Technology type	Electromechanical

Complementary

[Us] rated supply voltage	24 V DC (Us +/- 10 %)
Power consumption in W	2.5 W
Output type	Contact (volt-free)
Preset number	1
Counting mode	Adding Subtracting
Input type	Contact (20 VA/220 V/1 A maximum)
Mounting mode	Flush-mounted Removable
Mounting support	Panel mounting
Fixing mode	By screws
Connections - terminals	AMP lugs on connection box
Height	75 mm
Number of outputs	1
Product weight	0.2 kg
Width	60 mm
Product destination	Cable
CAD overall width	60 mm
CAD overall height	75 mm
CAD overall depth	102 mm
Contacts usage	Volt-free contacts
Input current	0...1 A
Rotary handle fixing	Screws

Environment


standards	EN 50081-2 EN 50082-2 EN 61010
product certifications	CE
IP degree of protection	IP40 conforming to IEC 60529
ambient air temperature for operation	-10...50 °C
ambient air temperature for storage	-40...85 °C
vibration resistance	5 gn (f = 10...150 Hz) conforming to IEC 60068-2-6
shock resistance	30 gn for 6 ms conforming to IEC 60068-2-27
electrical shock protection class	Class II conforming to IEC 60536

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


Electromechanical Preset Counters

Subtracting Preset Counters with Mechanical Display

XBKP50100D•0M

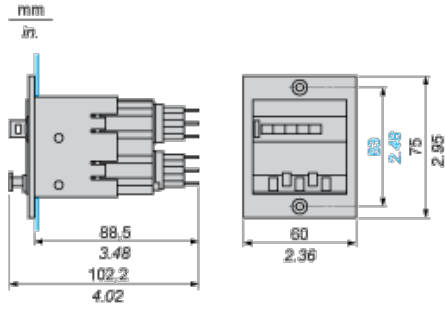


Flush-Mounting




Adding Preset Counters with Mechanical Display

XBKP50100D•0M

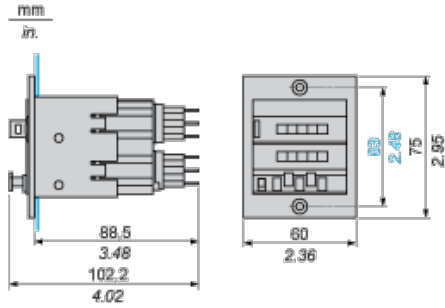

Flush-Mounting



Wiring Diagram of Electromechanical Preset Counters

24 Vdc Supply Voltage

XBKP50100D•0M, XBKP50100U•0M

