

# Product data sheet

## Characteristics

# XZCPV11V12L2

pre-wired connectors XZ - straight female - M12 -  
5 pins - cable PVC 2m



## Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

## Complementary

Electrical connection	M12, 5 pins straight female connector
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	2 m
Cable outer diameter	5.2 mm
Cable composition	5 x 0.34 mm <sup>2</sup>
Wire insulation material	PVC
[Ue] rated operational voltage	60 V AC 75 V DC
[In] rated current	3 A
Contact resistance	5000 µOhm
Insulating resistance	1 GΩ
Product weight	0.09 kg


## Environment

IP degree of protection	IP65 IP67
Product certifications	cULus
Ambient air temperature for operation	-25...80 °C (static)
Ambient air temperature for storage	-25...80 °C

## Contractual warranty

Warranty period	18 months
-----------------	-----------

Dimensions

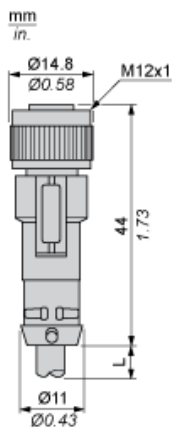


L :      Lenght of cable

---

## Connections and Schemes

---

### Connectors



BU : Blue  
BN : Brown  
BK : Black  
GY : Grey  
BK/WH : Black / White