


# Dual Channel Digital Storage Oscilloscope **multicomp** PRO

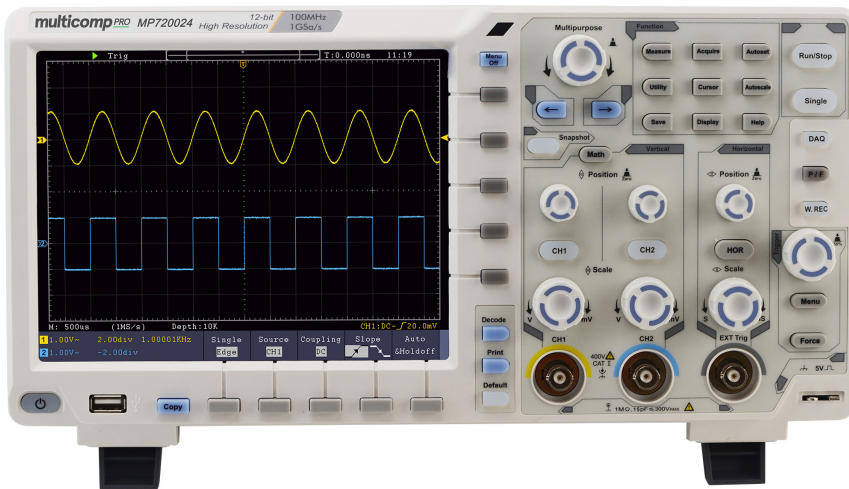

## Features

- 12-bit high resolution ADC, restoring the waveform detail fully
- 20M record length, and 55,000 wfms/s waveform refresh rate
- Low background noise, vertical sensitivity in 1 mV/div - 10 V/div
- Multi-trigger, and bus decoding function
- SCPI, and LabVIEW supported
- Ultra-thin body-design, less space accommodation
- Multi-interface integration - USB host, USB device, USB port for PictBridge, LAN, AUX, and more
- VGA port - better solution for video expansion, and teaching demonstration
- 8" 800 × 600 high resolution LCD Display

## Oscilloscope Specifications

Bandwidth	100MHz
Sample Rate	1GS/s (8 bits) 500MS/s (12 bits)
Vertical Resolution (A/D)	12 bits
Record length	20M
Waveform Refresh Rate	55,000 wfms/s
Horizontal Scale (s/div)	2ns/div - 1000s/div, step by 1~2~5
Rise Time (at input, typical)	≤3.5ns
Channel	2 + 1 Ext Trigger
Display	8" colour LCD, 800 × 600 pixels
Input Impedance	1MΩ ± 2%, in parallel with 15pF ±5pF
Channel Isolation	50Hz : 100 : 1, 10MHz : 40 : 1
Max Input Voltage	1MΩ ≤ 300Vrms
DC Accuracy	Average≥16: ±(3% reading + 0.05 div) for ΔV
Probe Attenuation Factor	0.001X - 1000X, step by 1 - 2 - 5
LF Respond (AC, -3dB)	≥10Hz (at input, AC coupling, -3dB)
Sample Rate / Relay Time Accuracy	±1 ppm (TYP, Ta=+25°C)

Newark.com/exclusive-brands  
Farnell.com/exclusive-brands  
Element14.com/exclusive-brands

**multicomp** PRO

# Dual Channel Digital Storage Oscilloscope **multicomp** PRO

Interpolation	sin(x) / x	
Interval ( $\Delta T$ ) Accuracy (full bandwidth)	Single: $\pm(1 \text{ interval time} + 1 \text{ ppm} \times \text{reading} + 0.6 \text{ ns})$ ; Average > 16: $\pm(1 \text{ interval time} + 1 \text{ ppm} \times \text{reading} + 0.4 \text{ ns})$	
Input Coupling	DC, AC, and GND	
Vertical Sensitivity	1mV/div - 10V/div (at input)	
Trigger Type	Edge, Video, Pulse, Slope, Runt, Windows, Timeout, Nth Edge, Logic, I2C, SPI, RS232 and CAN	
Bus Decoding	I <sup>2</sup> C, SPI, RS232, and CAN	
Trigger Mode	Auto, Normal, and Single	
Vertical Range	$\pm 2\text{V}$ ( 1mv/div - 50mv/div), $\pm 20\text{V}$ ( 100mv/div - 1V/div), $\pm 200\text{V}$ (2V/div - 10V/div)	
Line / Field Frequency (video)	NTSC, PAL and SECAM standard	
Cursor Measurement	$\Delta V$ , and $\Delta T$ between cursors, $\Delta V$ and $\Delta T$ between cursors, and auto- cursors	
Automatic Measurement	Vpp, Vavg, Vrms, Freq, Period, Peak RMS, Cursor RMS, Vmax, Vmin, Vtop, Vbase, Vamp, Overshoot, Phase, Preshoot, Rise Time, Fall Time, +Width, -Width, +Duty, -Duty, Duty Cycle, Delay A→B ↑, Delay A→B ↓, +Pulse Count, -Pulse Count, Rise Edge Count, Fall Edge Count	
Waveform Math	+, -, ×, ÷, FFT, FFTrms, Intg, Diff, Sqrt, User Defined Function, digital filter (low pass, high pass, band pass, band reject)	
Waveform Storage	50 waveforms	
Lissajou's Figure	Bandwidth	Full bandwidth
	Phase Difference	$\pm 3$ degrees
Communication Interface	USB host, USB device, USB port for PictBridge, Trig Out (P/F), LAN, and VGA (optional)	
Frequency Counter	Available	
Power Supply	100V AC to 240V AC, 50/60Hz, CAT II	
Power Consumption	<15W	
Fuse	2A, T class, 250V	
Dimension (W × H × D)	340mm × 177mm × 90mm	
Weight	2.4kg	
Standard Accessories Included	Power cord, USB cable, CD-Rom.Manual, Probes, Probe Adjust Tool	
Optional Accessories	Soft bag	
Power Cord Plug Type	US	
Warranty	12 months	

## Part Number Table

Description	Part Number
Dual Channel Digital Storage Oscilloscope, 100MHz	MP720024 US

**Important Notice** : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/exclusive-brands  
 Farnell.com/exclusive-brands  
 Element14.com/exclusive-brands

**multicomp** PRO