

- Ultra wide 4:1 input voltage 10 W DC/DC converter in a compact DIP-24 plastic case
- I/O isolation 5000 VACrms rated for 250 VACrms working voltage
- Certification according to IEC/EN/ES 60601-1 3rd edition for 2XMOPP
- Risk management process according to ISO 14971 including risk management file
- Acceptance criteria for electronic assemblies according to IPC-A-610 Level 3
- Low leakage current < 2µA
- Extended operating temperature range -40°C to 90°C.
- EMC compliance to IEC 60601-1-2 4th edition and EN55032 class A
- Operating up to 5000m altitude
- 5 year product warranty



The THM-10WI series is a range of medical 10 Watt DC/DC converters in DIP-24 plastic package and with ultra-wide 4:1 input voltage range. They provide a reinforced isolation system for 5000 VACrms isolation and a very low leakage current of less than 2 µA. The units are approved to IEC/EN/ES 60601-1 3rd edition for 2 × MOPP (Means Of Patient Protection) and come along with an ISO 14971 risk management file. Design and production conform to the quality management system ISO 13485. With a high efficiency of up to 87% and highest grade components the converters can reliably operate in an ambient temperature range of -40°C up to +90°C. They constitute a reliable solution not only for medical equipment but also for demanding ranges of application such as transportation, control & measurement or IGBT drivers.

Models				
Order code*	Input voltage range	Output voltage	Output current max.	Efficiency typ.
THM 10-0510WI	4.5 – 9 VDC (5 VDC nominal)	3.3 VDC	2500 mA	80.0 %
THM 10-0511WI		5.0 VDC	2000 mA	84.0 %
THM 10-0512WI		12 VDC	830 mA	86.5 %
THM 10-0513WI		15 VDC	670 mA	87.0 %
THM 10-0515WI		24 VDC	416 mA	85.5 %
THM 10-0521WI		±5.0 VDC	±1000 mA	83.0 %
THM 10-0522WI		±12 VDC	±416 mA	85.5 %
THM 10-0523WI		±15 VDC	±333 mA	86.5 %
THM 10-2410WI	9.0 – 36 VDC (24 VDC nominal)	3.3 VDC	2500 mA	83.0 %
THM 10-2411WI		5.0 VDC	2000 mA	86.5 %
THM 10-2412WI		12 VDC	830 mA	89.0 %
THM 10-2413WI		15 VDC	670 mA	89.0 %
THM 10-2415WI		24 VDC	416 mA	89.0 %
THM 10-2421WI		±5.0 VDC	±1000 mA	85.0 %
THM 10-2422WI		±12 VDC	±416 mA	89.0 %
THM 10-2423WI		±15 VDC	±333 mA	88.0 %
THM 10-4810WI	18 – 75 VDC (48 VDC nominal)	3.3 VDC	2500 mA	82.5 %
THM 10-4811WI		5.0 VDC	2000 mA	86.5 %
THM 10-4812WI		12 VDC	830 mA	89.0 %
THM 10-4813WI		15 VDC	670 mA	89.0 %
THM 10-4815WI		24 VDC	416 mA	88.5 %
THM 10-4821WI		±5.0 VDC	±1000 mA	85.0 %
THM 10-4822WI		±12 VDC	±416 mA	88.0 %
THM 10-4823WI		±15 VDC	±333 mA	88.0 %

\* Suffix **-B2** for trim option with adjustable output  
 Suffix **-B3** for remote-control option  
 Suffix **-B4** for trim + remote-control option

## Input Specifications

Input current no load	5 Vin models: 20 mA typ. 24 Vin models: 6 mA typ. 48 Vin models: 4 mA typ.	
Surge voltage (3 sec. max.)	5 Vin models: 16 V max. 24 Vin models: 50 V max. 48 Vin models: 100 V max.	
Start-up voltage	5 Vin models: 4.5 VDC (or lower) 24 Vin models: 9 VDC (or lower) 48 Vin models: 18 VDC (or lower)	
Startup time	30 ms typ.	
Under voltage shut down	5 Vin models: 4 VDC typ. 24 Vin models: 8 VDC typ. 48 Vin models: 16 VDC typ.	
Conducted noise	<ul style="list-style-type: none"> <li>– Conducted &amp; Radiated input suppression</li> <li>– Filter proposal for complying to EN 55032 class B</li> </ul>	EN 55011 limits to IEC 60601-1-2 4th edition EN 55032 class A (internal filter) EN 55032 class B (with external components) <a href="http://www.tracopower.com/overview/thm10wi">www.tracopower.com/overview/thm10wi</a>
EMC immunity	<ul style="list-style-type: none"> <li>– Generic for Medical equipment</li> <li>– ESD (electrostatic discharge)</li> <li>– Radiated immunity</li> <li>– Fast transient / surge (with external input capacitor / diode)</li> <li>– Conducted immunity</li> <li>– Magnetic field immunity</li> </ul>	IEC/EN 60601-1-2 4th edition EN 61000-4-2, air $\pm 8$ kV, contact $\pm 6$ kV, perf. criteria A EN 61000-4-3, 10 V/m, perf. criteria A EN 61000-4-4, $\pm 2$ kV, perf. criteria A EN 61000-4-5, $\pm 2$ kV perf. criteria A 5 Vin models: Nippon chemi-con KY 1000 $\mu$ F/ 25 V and reverse diode (Vishay V10P45) in parallel 24 Vin models: Nippon chemi-con KY 470 $\mu$ F/ 50 V 48 Vin models: Nippon chemi-con KY 330 $\mu$ F/ 100 V EN 61000-4-6, 10 Vrms, perf. criteria A EN 61000-4-8 100 A/m, continuous, perf. criteria A 1000 A/m, 1 sec., perf. criteria A
External input fuse required (recommended values, slow blow type)	5 Vin models: 5 A 24 Vin models: 2 A 48 Vin models: 1 A	

## Output Specifications

Voltage set accuracy			$\pm 1\%$ max.
Output voltage adjustment (for THM 10WI -B2 / -B4 option models only)			
	- Single output	15 & 24 Vout models:	-10 / +20%
		other models:	$\pm 10\%$
	- Dual output	5, 12 & 15 Vout models:	$\pm 10\%$
Regulation			
	- Input variation	single output:	0.2% max.
		dual output:	0.5% max.
	- Load variation 0 – 100 %	single output:	0.2% max.
		dual output:	1.0% max.
	- Cross regulation	dual output:	5.0% max. (asymmetrical load 25/100%)
Minimum load			not required
Ripple and noise (20 MHz Bandwidth)			
		3.3 & 5.0 VDC models:	30 mVp-p typ. with cap. 10 $\mu$ F/25V X7R MLCC
		12 & 15 VDC models:	40 mVp-p typ. with cap. 10 $\mu$ F/25V X7R MLCC
		24 VDC models:	50 mVp-p typ. with cap. 4.7 $\mu$ F/50V X7R MLCC
Transient response	- Recovery time (25% load step change)		250 $\mu$ s typ.
Over load protection			at 150 % typ. of lout rated (hiccup mode)
Short circuit protection			Continuous, automatic recovery
Over voltage protection			
	-Single output	3.3 VDC models:	3.7 – 5.4 VDC
		5.0 VDC models:	5.6 – 7.0 VDC
		12 VDC models:	13.5 – 19.6 VDC
		15 VDC models:	18.3 – 22.0 VDC
		24 VDC models:	29.1 – 32.5 VDC
	-Dual output	$\pm 5$ VDC models:	5.6 – 7.0 VDC
		$\pm 12$ VDC models:	13.5 – 18.2 VDC
		$\pm 15$ VDC models:	17.0 – 22.0 VDC
Capacitive load			
	-Single output	3.3 VDC models:	3'000 $\mu$ F max.
		5.0 VDC models:	2'500 $\mu$ F max.
		12 VDC models:	430 $\mu$ F max.
		15 VDC models:	350 $\mu$ F max.
		24 VDC models:	125 $\mu$ F max.
	-Dual output	$\pm 5$ VDC models:	1440 $\mu$ F max. (each output)
		$\pm 12$ VDC models:	550 $\mu$ F max. (each output)
		$\pm 15$ VDC models:	180 $\mu$ F max. (each output)

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### General Specifications

Temperature ranges	<ul style="list-style-type: none"> <li>- Operating</li> <li>- Rated according to IEC/EN 60601-1</li> <li>- Case temperature</li> <li>- Storage temperature</li> </ul>	<ul style="list-style-type: none"> <li>-40°C to +90°C (with derating)</li> <li>-40°C to +50°C (without derating)</li> <li>+105°C max.</li> <li>-55°C to +125°C</li> </ul>
Derating		3.5%/K above 75°C
Thermal impedance		18°C/W typ.
Humidity (non condensing)		5 % to 95 % rel H max.
Isolation voltage (50Hz, 60sec)	- to meet ES/IEC/EN 60601-1	5000 VACrms, rated for 250 VACrms working voltage, 2 × MOPP
Clearance/creepage		8 mm min.
Leakagecurrent (at 240VAC, 60Hz)		2 µA max.
Isolation capacitance (input/output)		17 pF max.
Altitude during operation		5000 m
Temperature coefficient		±0.02 %/K typ.
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)		3'850'000 h
Switching frequency		300 kHz ±30 kHz (pulse width modulation)
Vibration and thermal shock resistance		according to MIL-STD-810F
Remote On/Off (for THM 10WI -B3 / -B4 option models only)	<ul style="list-style-type: none"> <li>- Off</li> <li>- On</li> <li>- Off idle current</li> <li>- Remote pin input current</li> </ul>	<ul style="list-style-type: none"> <li>2.2 – 12 VDC (referred to -Vin pin)</li> <li>open circuit or 0 – 1.2 VDC (referred to -Vin pin)</li> <li>2.5 mA typ.</li> <li>-0.5 mA min.</li> <li>1 mA max.</li> </ul>
Safety standards/approvals	<ul style="list-style-type: none"> <li>- Medical equipment</li> <li>- Certification documents</li> </ul>	<ul style="list-style-type: none"> <li>ANSI/AAMI ES60601-1:2005/(R)2012,</li> <li>IEC/EN60601-1 3rd edition</li> <li><a href="http://www.tracopower.com/overview/thm10wi">www.tracopower.com/overview/thm10wi</a></li> </ul>
Environmental compliance	<ul style="list-style-type: none"> <li>- Reach</li> <li>- RoHS</li> </ul>	<ul style="list-style-type: none"> <li><a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a></li> <li>RoHS directive 2011/65/EU</li> </ul>

### Physical Specifications

Casing material	non-conductive black plastic
Base material	non-conductive black plastic
Potting material	silicone (UL94 V-0 rated)
Package weight	14 g (0.48oz)
Soldering temperature	max. 265°C / 10 sec




- The component is not be used in an oxygen rich environment.
- The component is not to be used in conjunction with flammable anaesthetics and agents.
- The component has to be disposed appropriately. Please refer to local regulations (Waste Electrical and Electronic Equipment).
- A modification of the component is not allowed.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### Outline Dimensions


Standard pinning

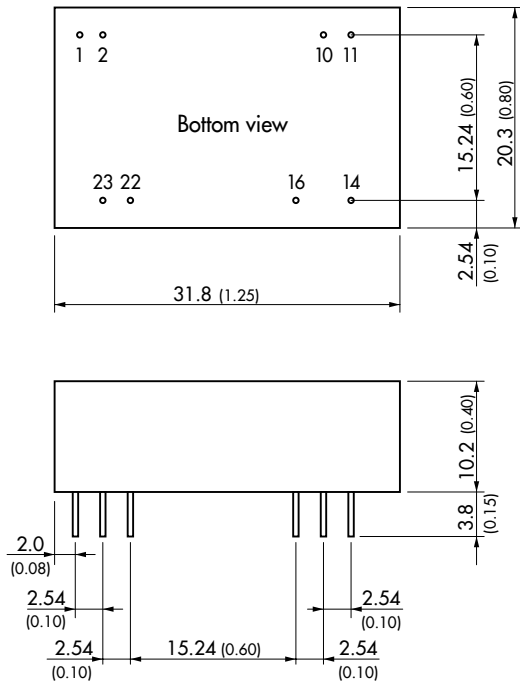

Standard Pinout		
Pin	Single	Dual
1	No Pin*/Remote	No Pin*/Remote
2	-Vin (GND)	-Vin (GND)
10	No Pin*/Trim	No Pin*/Trim
11	No con.	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin (Vcc)	+Vin (Vcc)
23	+Vin (Vcc)	+Vin (Vcc)

\*If Remote or Trim is not selected there is no pin on corresponding number

Optional pinning: suffix **-A1**

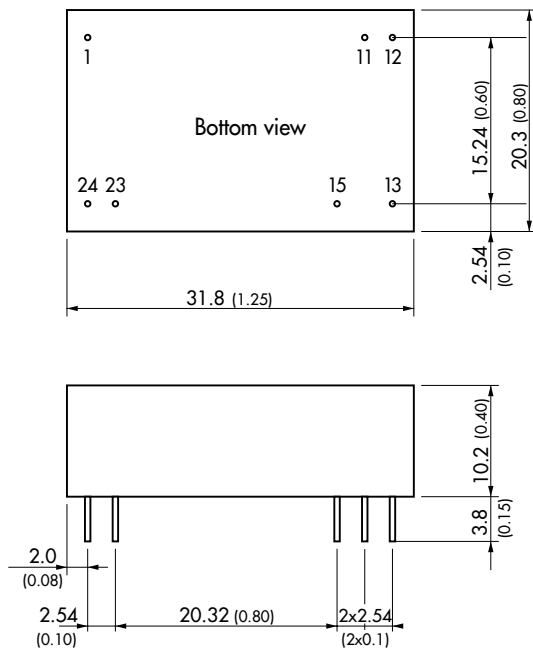

Optional Pinout		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
11	No pin	Common
12	-Vout	No pin
13	+Vout	-Vout
15	No pin	+Vout
23	-Vin (GND)	-Vin (GND)
24	-Vin (GND)	-Vin (GND)

Remark: No suffix **-A1** for 5 Vin models. Corresponding parts are with THM 10 series by default. see [www.tracopower.com/overview/thm10](http://www.tracopower.com/overview/thm10)

Dimensions in [mm], ( ) = Inch  
 Tolerances  $\pm 0.5$  ( $\pm 0.02$ )  
 Pin  $\varnothing 0.6 \pm 0.1$  ( $0.024 \pm 0.004$ )  
 Pin pitch tolerances  $\pm 0.25$  ( $\pm 0.01$ )