


novopro UV Bar 9

I N S T R U C T I O N M A N U A L

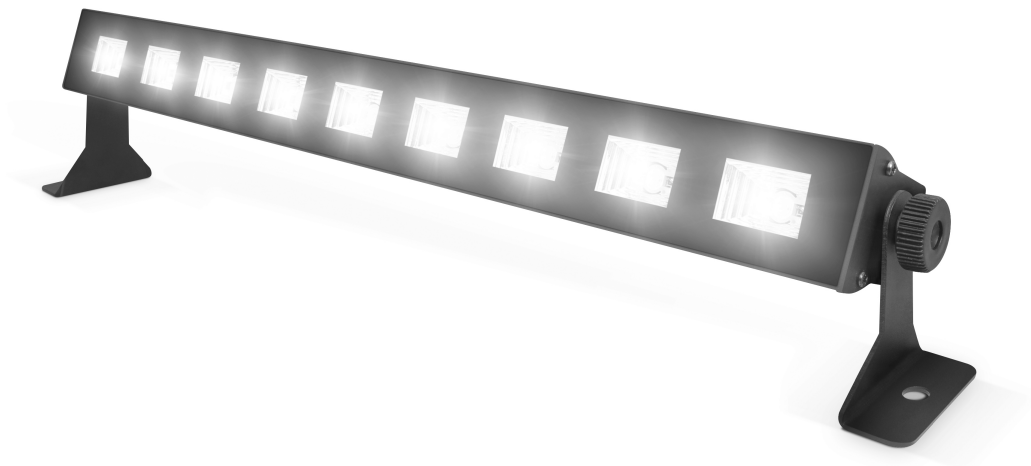

Manual version 1.0

This user manual will help you operate this product safely and quickly, so please spend a few minutes to read through the enclosed information.

Due to continuous product development, please check for the latest version of this product manual at:

www.novopro.co.uk

Designed and engineered in the UK and manufactured in China for Novopro Ltd.
Novopro Ltd is a trade-only supplier and only supply wholesale to trade resellers.
At the end of the products working life, please take it to a recycling plant for environmentally friendly disposal.
Due to continuous product development, specifications and appearance are subject to change. E&OE.
© Copyright Novopro.

Thank you for purchasing this Novopro product.

To optimise its performance, please read these instructions carefully to familiarise yourself with the basic operations of the unit. Please retain them for future reference. This unit has been tested at the factory before being shipped to you. To prevent or reduce the risk of electrical shock or fire, do not expose the unit to rain or moisture. To prevent a fire hazard, do not expose the unit to any naked flame sources. Unplug this apparatus during lightning storms or if it is unlikely to be used for long periods of time. When installing the unit, please ensure you leave enough space around the unit for ventilation. Slots and openings in the unit are provided for ventilation to ensure reliable operation of the product and to protect it from overheating. To prevent fire hazard, the openings should never be blocked or covered.

The unit is powered by the mains, always handle the power cable by the plug. Never pull out the plug by pulling on the cable. Never touch the power cable when your hands are wet as this could cause an electric shock. Do not tie a knot in the cable. The power cable should be placed such that it is not likely to be stepped on. A damaged power cable can cause a fire or give you an electrical shock. Check the power cable periodically, if you ever find that it is damaged, replace it before using the unit again. The voltage of the available power supply differs according to country or region. Be sure that the power supply voltage of the area where this unit is to be used meets the requirements of the unit.

The lightning flash symbol inside a triangle is to alert the user to the presence of high voltage within the unit's enclosure that may be of sufficient power to constitute a risk of electrical shock to persons. Caution: to prevent the risk of electric shock, do not attempt to open the unit. No user-serviceable parts inside. Refer all servicing to qualified service personnel. The exclamation mark inside a triangle is intended to alert the user to the presence of important operating and maintenance instructions in the literature accompanying the appliance.

Select the installation location of your unit carefully. Avoid placing it in direct sunlight or locations subject to vibration and excessive dust. Do not use the unit where there are extremes in temperature (do not exceed 40°C).

Unpacking and safety Please unpack your new product carefully. Your new product should reach you in perfect condition. Please check that no damage has occurred during transit. If any damage is found, do not operate your unit, **please contact the retailer you purchased it from immediately.**

Packing list: Lighting unit / mounting brackets / instruction manual / carry bag.

Manufacturer EC Declaration of Conformity



In compliance with the following requirements:

RoHS Directive (2011/65/EU) and WEEE Directive (2012/19/EU) and (2002/96/EU).

At the end of the products working life, please ensure that the unit is taken to a recycling plant for environmentally friendly disposal - IT MUST NOT be disposed of with general household waste.

Overhead rigging

Important - the installation must be carried out by qualified service personal only. Improper installation can result in serious injuries and /or damage to property. Overhead rigging requires extensive experience. Working load limits should be respected, certified installation materials should be used and the installed unit should be inspected regularly for safety.

- Make sure the area below the installation place is free from unwanted persons during rigging, de-rigging and servicing.
- Locate the unit in a well ventilated spot, far away from any flammable materials and/or liquids. The fixture must be fixed **at least 50cm** from surrounding walls
- The device should be installed out of reach of people and outside of areas where persons may walk by or be seated.
- A safety cable must be used when rigging the product overhead.
- Before rigging, please ensure that the installation area can hold minimum point load of 10 times the device's weight.
- The device should be well fixed; a free swinging mounting is dangerous.
- Do not cover any ventilation opening as this may result in overheating

Operation

The Novopro UV Bar 9 is a totally plug&play unit. Simply plug it into the mains power supply, turn on the power switch and the unit will operate until you turn off the switch or unplug the mains power. In order to prolong the life of the product, always turn off the unit when not in use.

Product specification:

Mains power	220-240V / 50/60Hz
Power consumption	30w
Light source	9 x 3w UV LEDs
Operating temperature	-25°C to 40°C
Dimensions (WxDxH)	500 x 50 x 60mm (not inc bracket)
Nett weight	0.7Kg

Due to continuous product development, specifications and appearance are subject to change.