

# Resettable Fuse - Radial


**multicomp** PRO

**RoHS  
Compliant**



## Specifications:



Lead Material	: Tin Plated Copper
Soldering Characteristic	: MIL-STD-202, Method 208E
Insulating Coating	: Flame retardant epoxy
Operating Current	: 2.5A to 14A
Maximum Voltage	: 16V
Operating Temperature Range	: -40°C to +85°C

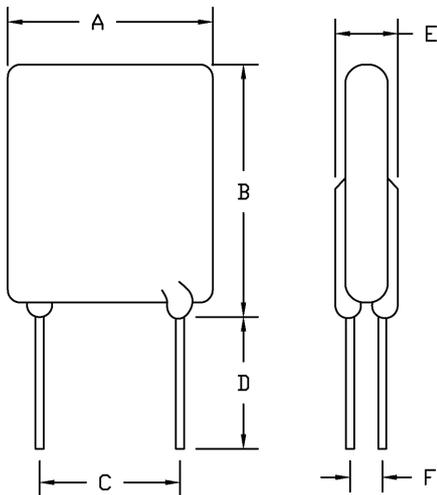

A Max.	B Max.	C Typ.	D Min.	E Max.	F Typ.	Part Number
7.1	11	5.1	7.6	3	1.2	MC33151
8.9	12.8					MC33152
10.4	14.3					MC33153

Dimensions : Millimetres

Lead Size: 20 AWG  
Ø0.81mm Diameter

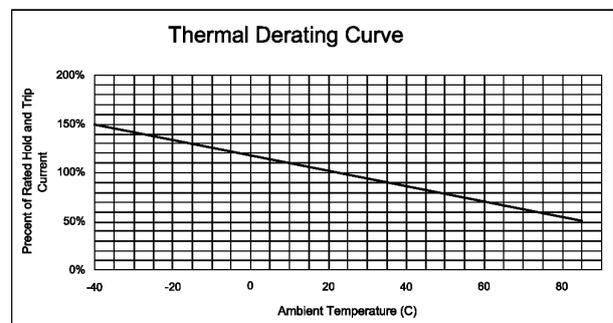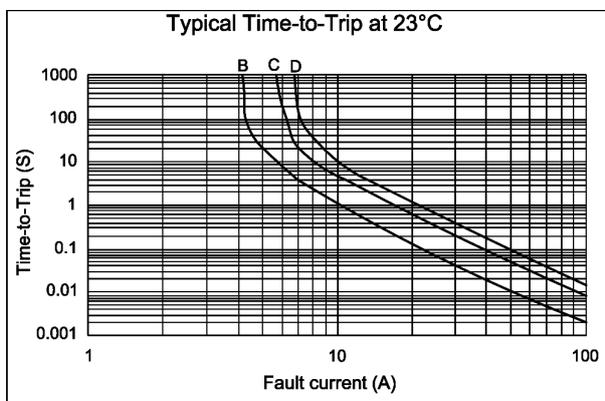

Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
Element14.com/multicomp-pro

**multicomp** PRO

# Resettable Fuse - Radial **multicomp**PRO

## Part Number Table

Description	Hold Current	Trip Current	Max.Time To Trip	Max. Current	Rated Voltage	Typ. Power	Resistance Tolerance		Time-to-Trip Curve Option	Part Number
							RMIN	R1MAX		
	IH, A	IT, A	at 5×H	IMax, A	VMax, V DC	Pd, W	ohms	ohms		
Fuse, Resettable, Radial, 3A	3	5.1	2	100	16	2.3	0.034	0.105	OptionB	MC33151
Fuse, Resettable, Radial, 4A	4	6.8	3.5			2.4	0.05	0.063	OptionC	MC33152
Fuse, Resettable, Radial, 5A	5	8.5	3.6			2.6	0.014	0.044	OptionD	MC33153

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro  
 Farnell.com/multicomp-pro  
 Element14.com/multicomp-pro

**multicomp**PRO