

Transient Voltage Suppression Diodes Surface Mount

multicomp PRO



Features:

- Ideal for automated placement
- Glass passivated chip junction
- Available in uni-directional and bi-directional
- 600 W peak pulse power capability with a 10/1000 μ s waveform, repetitive rate (duty cycle):0.01%
- Very fast response time
- Low incremental surge resistance
- Solder dip 260°C, 40seconds

Typical Applications:

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive and telecommunication.

Mechanical Data:

Case	: SMB molded plastic Epoxy meets UL 94V-0 flammability rating
Terminals	: Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D
Polarity	: Colour band denotes cathode end
Reverse Voltage	: 440Volts
Power Dissipation	: 600 Watts

Maximum Ratings and Electrical Characteristics:

T_A = 25 °C unless otherwise noted.

Characteristics	Symbol	Value	Unit
Peak Pulse Power Dissipation at T _A = 25°C by 10x1000 μ s waveform (Note 1), (Note 2)	P _{PPM}	600	Watts
Power Dissipation on Infinite Heat Sink at T _A = 50°C	P _{M(AV)}	5	
Peak forward surge current 8.3ms Single Half Sine-Wave Uni-Directional only	I _{FSM}	100	Amps
Maximum Instantaneous Forward Voltage at 50A for Uni-Directional only (Note 4)	V _F	3.5V / 5	Volts
Typical Thermal Resistance Junction to Lead	R _{UJA}	100	°C/W
Typical Thermal Resistance Junction to Ambient	R _{UJL}	20	°C/W
Operating Temperature Range	T _J	-65 to +150	°C
Storage Temperature Range	T _{STG}		

Notes:

1. Non-repetitive current pulse, per Fig.3 and derated above T_A=25°C per Fig.2.
2. Mounted on 5mm × 5mm copper pad to each terminal
3. Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only.
4. V_F < 3.5V for V_{BR} < 200V and V_F < 6.5V for V_{BR} > 201V
5. The typical data above is for reference only

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO

Transient Voltage Suppression Diodes Surface Mount

Part Number		Reverse Stand off Voltage VR	Breakdown Voltage VBR (Volts) @ IT		Test Current	Max. Clamping Voltage VC @ Ipp	Peak Pulse Current Ipp	Max. Reverse Leakage IR@ VR
Unidirectional	Bidirectional	VWM (V)	Min.	Max.	IT (mA)	Vc (V)	IPPM (Amps)	ID (µA)
-	SMBJ100CA	100	111	123	1	162	3.7	1
SMBJ18A	SMBJ18CA	18	20	22.1	1	29.2	20.6	1
SMBJ200A	-	200	224	247	1	324	1.9	1
-	SMBJ24CA	24	26.7	29.5	1	38.9	15.5	1
SMBJ33A	SMBJ33CA	33	36.7	40.6	1	53.3	11.3	1
SMBJ36A	SMBJ36CA	36	40	44.2	1	58.1	10.4	1
SMBJ40A	SMBJ40CA	40	44.4	49.1	1	64.5	9.3	1
SMBJ48A	SMBJ48CA	48	53.3	58.9	1	77.4	7.8	1
SMBJ70A	-	70	77.8	86	1	113	5.3	1

Notes:

1. For bidirection type having V_{RWM} of 10 volts and less, the I_R limit is double.
2. For parts without A (V_{BR} is ±10% and V_c is 5% higher than with A parts).

Ratings and Characteristic Curves

Figure 1 - Peak Pulse Power Rating

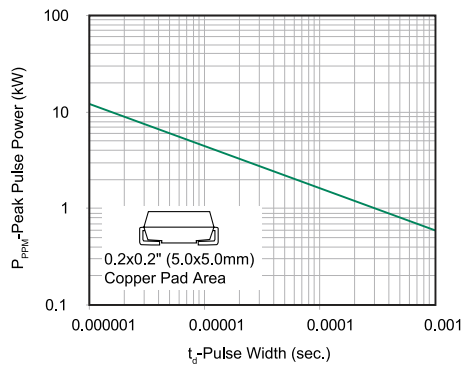


Figure 2 - Pulse Derating Curve

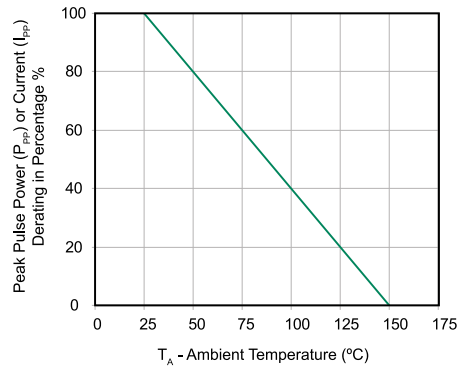


Figure 3 - Pulse Waveform


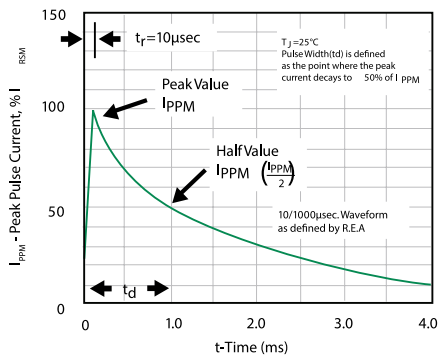


Figure 4 - Typical Junction Capacitance

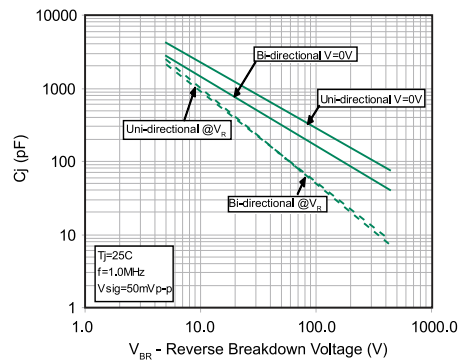

Transient Voltage Suppression Diodes Surface Mount



Figure 5 - Steady State Power Dissipation Derating Curve



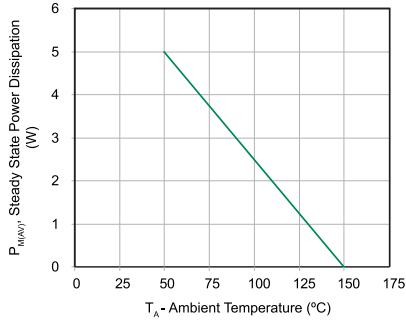


Figure 6 - Maximum Non-Repetitive Peak Forward Surge Current Uni-Directional Only

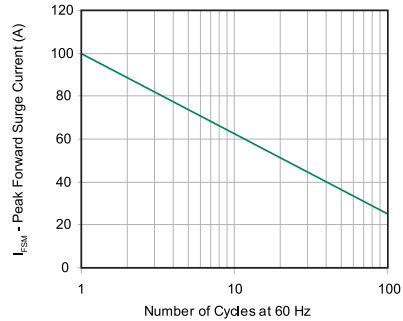

Dimensions:

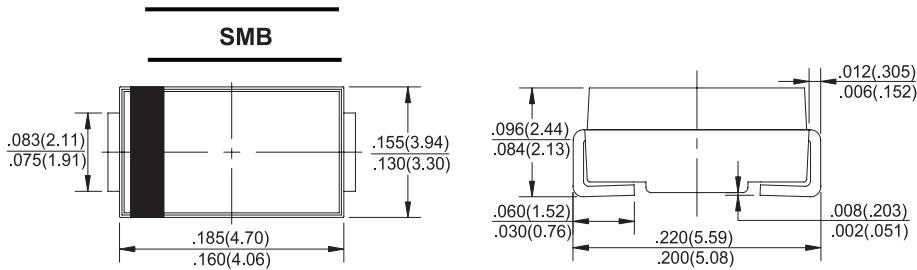

Dimensions : Inches (Millimetres)

Part Number Table

Description	Part Number
Transient Voltage Suppression Diodes Surface Mount	SMBJ100CA
	SMBJ18A
	SMBJ18CA
	SMBJ200A
	SMBJ24CA
	SMBJ33A
	SMBJ33CA
	SMBJ36A
	SMBJ36CA
	SMBJ40A
	SMBJ40CA
	SMBJ48A
	SMBJ48CA
	SMBJ70A

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

