

**RoHS
Compliant**

Features

- Multiturn / Wirewound / Industrial
- Metal shaft and Bushing
- Bushing Mount
- Available with shaft (6mm Dia.)



Electrical Characteristics

Standard Resistance Range	: 100 to 100kΩ
Resistance Tolerance	: ±5% Std.
Independent Linearity	: ±0.25%
Effective Electrical Angle	: 3600 Deg. -10 Deg. min.
Absolute Minimum Resistance	: 0.2% or 2Ω Max.
Noise	: 100Ω ENR max.
Insulation Resistance	: 500V DC, 1000MΩ min.
Dielectric Withstanding Voltage	: 101.3kpa 900V AC




Environmental Characteristic

Power Rating	: 2 Watt (70°C), 0 Watt (125°C) (500 Volts Max.)
Temperature Range	: -55°C to +125°C
Temperature Coefficient	: ±100ppm/°C
Vibration	: 98m/s ² (1% ΔTR, 1% ΔVR)
Shock	: 490m/s ² (1% ΔTR, 1% ΔVR)
Load Life	: 1,000 hrs, 2 Watt @ 70°C
Rotational Life (No Load)	: 1,000,000 Shaft revolutions
Total Resistance Shift	: ±5% Max.

Physical Characteristics

Torque	: 36mN-m Max.
Stop Strength	: 300mN-m max.
Mechanical Angle	: 3600 Deg. Min.

Diagram

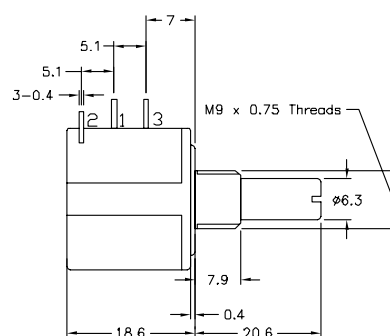

Dimensions : Millimetres

Part Number Table

Description	Resistance Ohms	Part Number
Precision Wirewound Potentiometer	100	MCWWPT-10-101-LF
	1,000	MCWWPT-10-102-LF
	10,000	MCWWPT-10-103-LF
	100,000	MCWWPT-10-104-LF
	200	MCWWPT-10-201-LF
	2,000	MCWWPT-10-202-LF
	20,000	MCWWPT-10-203-LF
	500	MCWWPT-10-501-LF
	5,000	MCWWPT-10-502-LF
	50,000	MCWWPT-10-503-LF

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.