

TECHNICAL DATA SHEET

PRO-ELEC

T8 LED Linear Fixture Model PEL01618 - 619

**RoHS
Compliant**

Input voltage	AC176-265V 50/60Hz
Input Current	41mA(Max)
Input Power	4W
PF	≥0.5
Output voltage	80V
Output current	50mA
CCT	3000K/4000K/6500K
CRI	≥80
Lumen output	400lm±10%
LM/W	100lm/w
Lumen maintenance	3000H@96% 6000H@92%
LED brand	SANAN
LED type	2835(24-26lm)
LED quantity	26PCS
Transmittance	90%
Beam angle	>120°
Body material	PC
Lifetime	30000H
Warranty	3 years
IP	IP20
Working Temperature	-20°C~45°C
Working Humidity	≤80%RH
Temperature and humidity of storage	20°C~65°C@≤95%RH
Certificate	CE/ERP/ROHS

Important Notice : This data sheet and its contents (the "Information") belong to pro-ELEC. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but pro-ELEC assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where pro-ELEC was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict pro-ELEC's liability for death or personal injury resulting from its negligence.

PRO-ELEC

TECHNICAL DATA SHEET

PRO-ELEC

**RoHS
Compliant**

T8 LED Linear Fixture Model PEL01620 - 621

Input voltage	AC176-265V 50/60Hz
Input Current	80mA(Max)
Input Power	8W
PF	≥0.5
Output voltage	75V
Output current	105mA
CCT	3000K/4000K/6500K
CRI	≥80
Lumen output	800lm±10%
LM/W	100lm/w
Lumen maintenance	3000H@96% 6000H@92%
LED brand	SANAN
LED type	2835(24-26lm)
LED quantity	48PCS
Transmittance	90%
Beam angle	>120°
Body material	PC
Lifetime	30000H
Warranty	3 years
IP	IP20
Working Temperature	-20°C~45°C
Working Humidity	≤80%RH
Temperature and humidity of storage	20°C~65°C@≤95%RH
Certificate	CE/ERP/ROHS

Important Notice : This data sheet and its contents (the "Information") belong to pro-ELEC. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but pro-ELEC assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where pro-ELEC was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict pro-ELEC's liability for death or personal injury resulting from its negligence.

PRO-ELEC

TECHNICAL DATA SHEET

PRO-ELEC

**RoHS
Compliant**

T8 LED Linear Fixture Model PEL01622 - 623

Input voltage	AC176-265V 50/60Hz
Input Current	100mA(Max)
Input Power	10W
PF	≥0.5
Output voltage	108V
Output current	92mA
CCT	3000K/4000K/6500K
CRI	≥80
Lumen output	1000lm±10%
LM/W	100lm/w
Lumen maintenance	3000H@96% 6000H@92%
LED brand	SANAN
LED type	2835(24-26lm)
LED quantity	70PCS
Transmittance	90%
Beam angle	>120°
Body material	PC
Lifetime	30000H
Warranty	3 years
IP	IP20
Working Temperature	-20°C~45°C
Working Humidity	≤80%RH
Temperature and humidity of storage	20°C~65°C@≤95%RH
Certificate	CE/ERP/ROHS

Important Notice : This data sheet and its contents (the "Information") belong to pro-ELEC. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but pro-ELEC assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where pro-ELEC was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict pro-ELEC's liability for death or personal injury resulting from its negligence.

PRO-ELEC

TECHNICAL DATA SHEET

PRO-ELEC

**RoHS
Compliant**

T5 LED Cabinet Light Model PEL01624 - 625

Input voltage	AC176-265V 50/60Hz
Input Current	140mA(Max)
Input Power	14W
PF	≥0.5
Output voltage	039V
Output current	102mA
CCT	3000K/4000K/6500K
CRI	≥80
Lumen output	1400lm±10%
LM/W	100lm/w
Lumen maintenance	3000H@96% 6000H@92%
LED brand	SANAN
LED type	2835(24-26lm)
LED quantity	90PCS
Transmittance	90%
Beam angle	>120°
Body material	PC
Lifetime	30000H
Warranty	3 years
IP	IP20
Working Temperature	-20°C~45°C
Working Humidity	≤80%RH
Temperature and humidity of storage	20°C~65°C@≤95%RH
Certificate	CE/ERP/ROHS




Important Notice : This data sheet and its contents (the "Information") belong to pro-ELEC. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but pro-ELEC assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where pro-ELEC was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict pro-ELEC's liability for death or personal injury resulting from its negligence.

PRO-ELEC

TECHNICAL DATA SHEET

PRO-ELEC

**RoHS
Compliant**

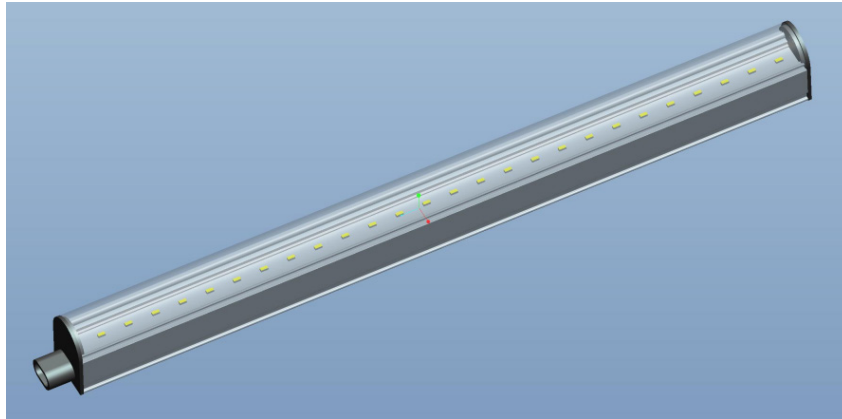

Model	L	W	H
	Max	Max	Max
PEL01618-619	313	22	30
PEL01620-621	573	22	30
PEL01622-623	873	22	30
PEL01624-625	1173	22	30

Important Notice : This data sheet and its contents (the "Information") belong to pro-ELEC. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but pro-ELEC assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where pro-ELEC was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict pro-ELEC's liability for death or personal injury resulting from its negligence.

PRO-ELEC