


LQW15CAR64K00#



< List of part numbers with package codes > LQW15CAR64K00D , LQW15CAR64K00B

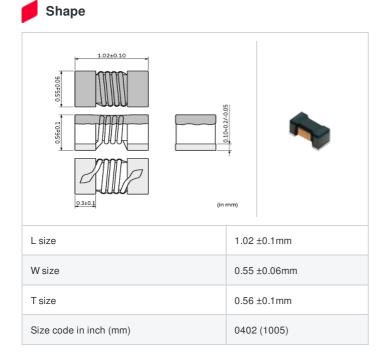

	Notoe
_	110163

"#" indicates a package specification code.

Typical impedance: 5800Ω (typ) @ $900MHz/2400\Omega$ (typ) @ 1.7GHz

References

Packaging code	Specifications	Minimum quantity
D	φ180mm Paper taping	10000
В	Packing in bulk	500

Mass (Typ.)

1 piece

0.0012g

Specifications

Inductance	640nH ±10%
Inductance test frequency	10MHz
Rated current (Itemp) (Based on Temperature rise)	240mA
Max. of DC resistance	1.40Ω
Self resonance frequency (min.)	870MHz
Operating temperature range (Self-temperature rise is included)	-40°C to 125°C
Class of magnetic shield	No Shield
Series	LQW15CA_00

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued


without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

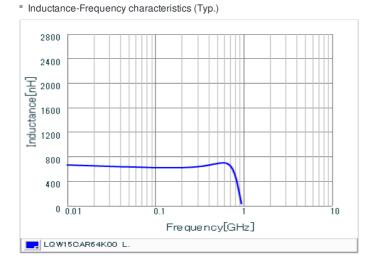

14 12

Q-Frequency characteristics (Typ.)



🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. 2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.