LQW18AN4N2C8Z# "#" indicates a package specification code.






















< List of part numbers with package codes > LQW18AN4N2C8ZD , LQW18AN4N2C8ZJ , LQW18AN4N2C8ZB

Shape

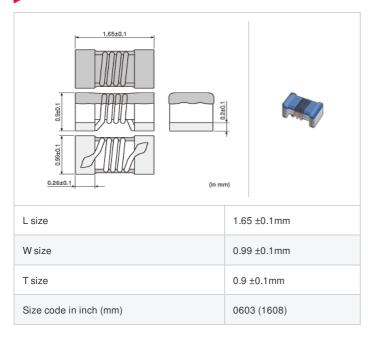



Notes

Please consider 'Notice (Rating).'

When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40 °C max.



Packaging code	Specifications	Minimum quantity
D	φ180mm Paper taping	4000
J	φ330mm Paper taping	10000
В	Packing in bulk	500

	Mass (Typ.)	
1 piece		0.0034g

Specifications

Inductance	4.2nH ±0.2nH
Inductance test frequency	100MHz
Rated current (Itemp) (Based on Temperature rise)	2200mA
Max. of DC resistance	0.028Ω
Q (min.)	30
Q test frequency	250MHz
Self resonance frequency (min.)	10000MHz
Operating temperature range (Self-temperature rise is not included)	-55 to 125°C
Series	LQW18AN_8Z

1 of 3



^{1.} This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



^{2.} This datasheet has only typical specifications because there is no space for detailed specifications



In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature.

Derating of Rated Current



2 of 3



Attention


1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

Inductance-Frequency characteristics (Typ.)



Q-Frequency characteristics (Typ.)



3 of 3



1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

