

Inline terminal - IB IL PD 24V-PAC - 2862987

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Inline terminal for power distribution (24 V), complete with accessories, (connector and labeling field) 24 V supply voltage is fed out from the segment circuit (US)

Product Description

The terminal is designed for use within an Inline station.

The terminal enables the 24 V supply voltage to be supplied from the segment circuit (U_S). It therefore provides the 24 V supply from U_S for sensors, which are connected to the IB IL 24 DI.../HD-PAC Inline terminals via 1-conductor technology.

Your advantages

- Supply of the 24 V segment voltage US



Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4017918910105
Weight per Piece (excluding packing)	44.000 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Dimensions

Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm

Interfaces

Connection method	Inline data jumper
Interface	Inline local bus

Power supply

I/O voltage	24 V DC
-------------	---------

Inline terminal - IB IL PD 24V-PAC - 2862987

Technical data

Power supply

I/O voltage range	19.2 V DC ... 30 V DC
Max. current consumption	8 A

General

Weight	44 g
--------	------

Inline potentials

Designation	Segment circuit supply (U _S)
Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current consumption	max. 8 A


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Connection diagram


e.g. for single wire connection with IB IL 24 DI 32/HD

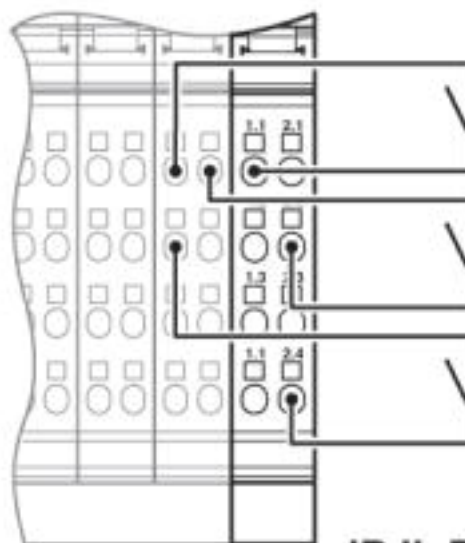

IB IL PD 24V-PAC

Inline terminal - IB IL PD 24V-PAC - 2862987

Dimensional drawing

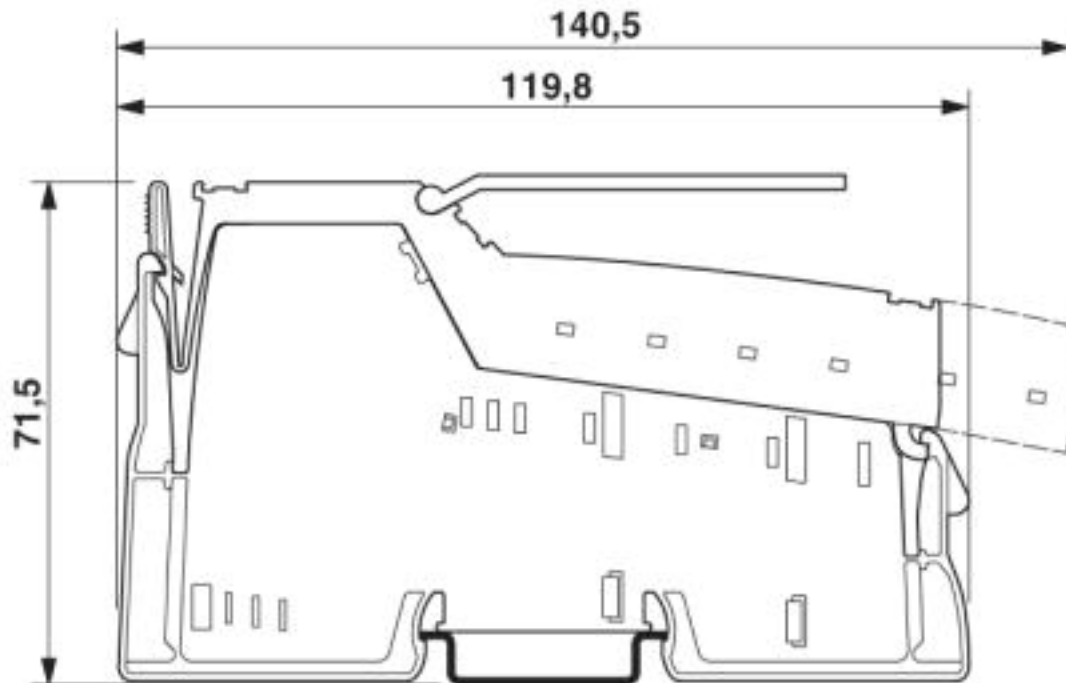

Classifications

eCl@ss

eCl@ss 4.0	27250300
eCl@ss 4.1	27250300
eCl@ss 5.0	27250300
eCl@ss 5.1	27242600
eCl@ss 6.0	27242600
eCl@ss 7.0	27242610
eCl@ss 8.0	27242610
eCl@ss 9.0	27242610

ETIM

ETIM 2.0	EC000313
ETIM 3.0	EC001600
ETIM 4.0	EC001600
ETIM 5.0	EC001600
ETIM 6.0	EC001600
ETIM 7.0	EC001600

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015

Inline terminal - IB IL PD 24V-PAC - 2862987

Classifications

UNSPSC

UNSPSC 12.01	43201404
UNSPSC 13.2	32151602
UNSPSC 18.0	32151602
UNSPSC 19.0	32151602
UNSPSC 20.0	32151602
UNSPSC 21.0	32151602

Approvals

Approvals

Approvals


DNV GL / BV / LR / ABS / EAC

Ex Approvals


Approval details

DNV GL		https://approvalfinder.dnvgl.com/	TAA00002CU
--------	---	---	------------

BV		http://www.veristar.com/portal/veristarinfo/generalinfo/approved/approvedProducts/equipmentAndMaterials	20989/B2_BV
----	---	---	-------------

LR		http://www.lr.org/en	08/20033
----	---	---	----------

ABS		http://www.eagle.org/eagleExternalPortalWEB/	17-HG1621871-PDA
-----	--	---	------------------

EAC			EAC-Zulassung
-----	---	--	---------------

Accessories

Accessories

Labeling panel

Inline terminal - IB IL PD 24V-PAC - 2862987

Accessories

Labeling field - IB IL FIELD 2 - 2727501

Labeling field, width: 12.2 mm



Terminal marking

Insert strip - ESL 62X10 - 0809492

Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems: Laser printer, mounting type: insert, lettering field size: 62 x 10 mm, Number of individual labels: 72

