

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Junction box, material: Stainless steel, 316L/1.4404, surface resistance: brushed, silver, 200 mm x 150 mm x 80 mm, type of locking: Screw-on cover, scope of supply - ATD: Mounting plate, Fixing angle with mounting screws, M12 grounding bolts, affixed externally, Installation notes, Mounting plate

### Your advantages

- Innovative product range of high-quality stainless steel housings as the basis for individual terminal boxes
- Reduced assembly and approval effort thanks to ready-equipped terminal boxes
- Flange plates possible on four sides of the housing, including seal protection
- Housing adjustments using threads, bore holes, and rectangular cutouts with consideration given to normative specifications



# **Key Commercial Data**

| Packing unit                         | 1 pc                           |
|--------------------------------------|--------------------------------|
| GTIN                                 | 4 046356 927628                |
| GTIN                                 | 4046356927628                  |
| Weight per Piece (excluding packing) | 1,872.000 g                    |
| Custom tariff number                 | 94032080                       |
| Country of origin                    | Germany                        |
| Note                                 | Made to Order (non-returnable) |

### Technical data

#### General

| Scope of supply | Mounting plate                          |
|-----------------|---|
|                 | Fixing angle with mounting screws       |
|                 | M12 grounding bolts, affixed externally |
|                 | Installation notes                      |
| Color           | silver                                  |

#### **Dimensions**

| Width  | 200 mm |
|--------|--------|
| Height | 150 mm |



# Technical data

# Dimensions

| Depth                                    | 80 mm  |
|--|--------|
| Clearance width, maximum DIN rail length | 171 mm |
| Max. material thickness                  | 1.5 mm |

### General

| Housing material        | Stainless steel, 316L/1.4404 |
|-------------------------|------------------------------|
| Surface characteristics | brushed                      |
| Note                    | 240 grain                    |
| Cover fastening         | Screw-on cover               |
| Note                    | Allen screws                 |
| Fixing device           | External fixing clips        |
| Seal material           | Silicon                      |


### Ambient conditions

| Degree of protection of housing (IP) | IP66          |
|--------------------------------------|---------------|
| Protection class                     | I             |
| Degree of protection (IK)            | 7.00 J        |
| Temperature in operating conditions  | -55 °C 135 °C |


# Drawings







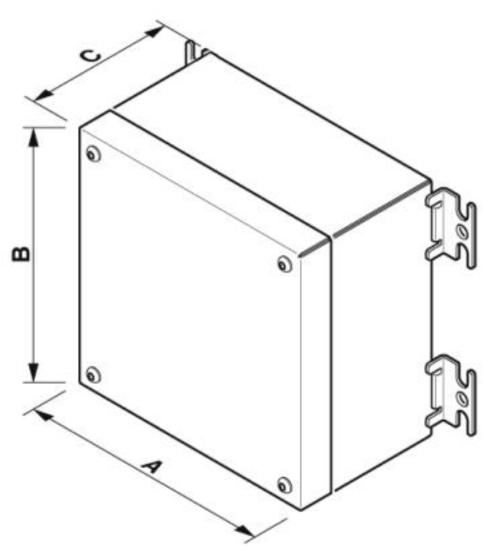



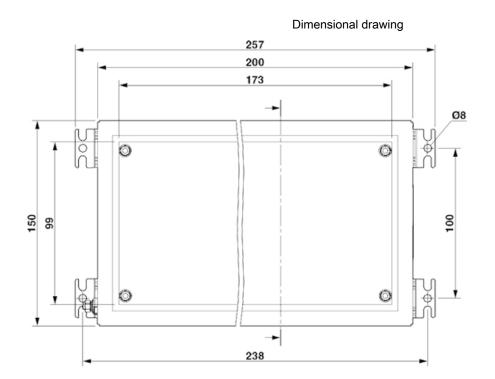



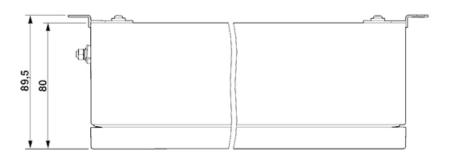



# Classifications

# eCl@ss

| eCl@ss 10.0.1 | 27180190 |
|---------------|----------|
| eCl@ss 4.0    | 27180100 |
| eCl@ss 4.1    | 27180100 |
| eCl@ss 5.0    | 27180500 |
| eCl@ss 5.1    | 27180100 |
| eCl@ss 6.0    | 27180100 |
| eCl@ss 7.0    | 27180190 |
| eCl@ss 8.0    | 27180190 |
| eCl@ss 9.0    | 27180190 |

### **ETIM**

| ETIM 4.0 | EC000261 |
|----------|----------|
| ETIM 5.0 | EC000261 |
| ETIM 6.0 | EC000261 |
| ETIM 7.0 | EC000261 |

### **UNSPSC**

| UNSPSC 13.2 | 31261502 |
|-------------|----------|
| UNSPSC 18.0 | 31261502 |
| UNSPSC 19.0 | 31261502 |
| UNSPSC 20.0 | 31261502 |
| UNSPSC 21.0 | 31261502 |

# **Approvals**

Approvals

Approvals

UL Listed / cUL Listed / DNV GL / cULus Listed

Ex Approvals

IECEx / ATEX / EAC Ex

Approval details

UL Listed



http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm

E471052



# Approvals

cUL Listed

(UL)

http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm

E471052

**DNV GL** 



https://approvalfinder.dnvgl.com/

TAE00001HA

cULus Listed



#### Accessories

Accessories

Mounting plate

Mounting plate - AE MP SH 200X150 - 0161963



Mounting plate, width: 108 mm, height: 171 mm, color: silver

#### Screwdriver tools

Screwdriver - SF-BIT-HEX 3-50 - 1212647



Screw bit, hexagon, E6.3-1/4" drive, size: Hex  $3 \times 50$  mm, hardened, suitable for holder according to DIN 3126-F6.3/ ISO 1173

### Screwdriver - SF-BIT-HEX 4-50 - 1212648



Screw bit, hexagon, E6.3-1/4" drive, size: Hex 4  $\times$  50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ ISO 1173

### Torque tool



# Accessories

Torque screwdriver - TSD-M 6NM - 1212226



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 3 - 6 Nm

### Universal tools

Control cabinet key - USS 4 - 1203149



Control cabinet key, metal, for all common types of control cabinet

Phoenix Contact 2020 © - all rights reserved http://www.phoenixcontact.com