


# GS1AF43

Blown fuse signalling contact, TeSys GS, 1st C/O, for GS1 GS2 3 poles 250-400 A, DIN fuse size 1-2

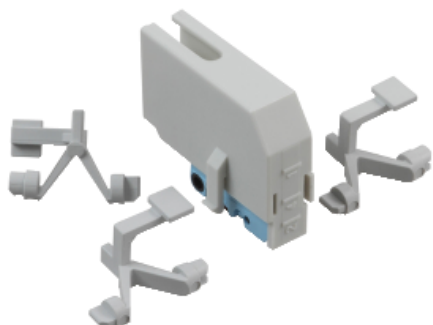

⚠ Discontinued

GS1AF43 has not been replaced. Please contact your customer care center for more information.

## Main

Range of product	TeSys
Device short name	GS1AF
Product or component type	Auxiliary contact
Contact application	Blown fuse signalling
Contacts type and composition	1 C/O
Contact operation	Instantaneous
[I <sub>th</sub> ] conventional free air thermal current	16 A 104 °F (40 °C)
[I <sub>e</sub> ] rated operational current	12 A 24 V DC-13 2 A 48 V DC-13 3 A 400 V AC-15 4 A 230 V AC-15 0.4 A 220 V DC-13 0.6 A 110 V DC-13

## Complementary

Range compatibility	TeSys GS fuse-switch disconnecter
Mechanical durability	30000 cycles
Electrical durability	30000 cycles AC-15
Product compatibility	GS
Poles description	3P
Switch rated current	250 A 400 A
Fuse type	DIN NFC
Fuse size	2 1
Net weight	0.08 lb(US) (0.038 kg)

## Ordering and shipping details

Category	18402-WORLD SERVICE PARTS(CONTROL ACCESS)
Discount Schedule	CP10

GTIN	03389110563344
Returnability	No

### Offer Sustainability

REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a>

### Contractual warranty

Warranty	18 months
----------	-----------