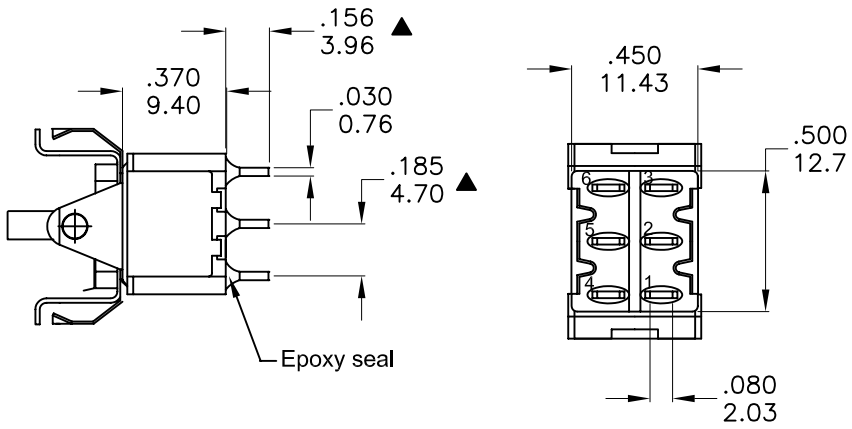

Model No.	POS.1	POS.2	POS.3
3MD5	ON	OFF	MOM
Term. Comm.	2-3,5-6	2-3,5-4	2-1,5-4
SCHEMATIC			

SWITCH FUNCTION

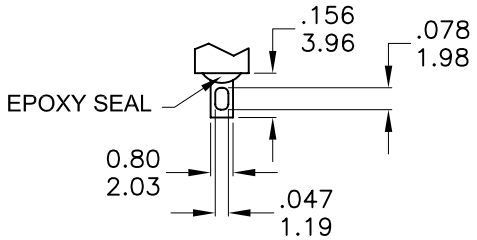

SOLDER LUG

SPECIFICATIONS
ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
CONTACT RESISTANCE: 10mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000MΩ min.
DIELETRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS
CASE: Dially phthalate (DAP) (UL94v-0).
ACTUATOR: Nylon,black std.
BUSHING: Brass,nickel plated.
HOUSING: Stainless Steel.
SWITCHE SUPPORT: Brass,Tin plated.
TERMINAL/CONTACT: Brass,Silver or gold plated.

RATING :
R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)
Q : 2Amps @250VAC
5Amps @120 VAC or 28 VDC

德利威電子股份有限公司
DAILYWELL ELECTRONICS CO.,LTD.

	符號	原尺寸	修改後尺寸	變更日期
1	Ⓐ			
2	Ⓑ			
3	Ⓒ			
4	Ⓓ			
5	Ⓔ			

SCALE (比例) : 3 : 2

TOLERANCE (公差) :
0.00 mm ± 0.25mm
0.0 mm ± 0.40mm
ANGULAR : ± 2.54 mm
FILE NAME : 3MDP0124

TITLE 圖 名	Miniature Rocker & Paddle Switches			SIZE 圖紙	A4
DWG NO. 圖 號	3MD5R00000M1QE			UNIT 單位	inch mm
REV. 版本	A	DATE 日 期	NOV - 14 - 2003	SHEET 張 數	1 of 1
CHECKED BY 審 核	Jack		DRAWN BY 製 圖	BLUE	