## THROUGHBEAM FIBRES

CE

| FIBRE TYPE | Length | Material | | Temp. | Fibre | Min. Bending | Min. Obj. | Range with amps. (mm) | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | Inner | Outer | Range | Diam. (mm) | Radius (mm) | Res. | F70R | F71R | F2 |
| FTS8BC  | 2m | Plastic | Polyethylene | -30°c to +70°c | Ø 0.5 | 10R (Top) 15R (Fibre) | Ø 0.5 | 130 | 75 | 30 |
| FT5BC  | 2m | Plastic | Polyethylene | -30°c to +70°c | Ø1 | 30R | Ø 1 | 460 | 270 | 80 |
| FT7BC  | 2m | Plastic | Polyethylene | -30°c to +70°c | Ø 1 | 30R | Ø 1 | 460 | 270 | 80 |
| FT8EBC  | 2m | Plastic | Polyethylene | -30°c to +70°c | Ø 0.75 | 20R | Ø 0.7 | 260 | 150 | 60 |
| FTH7BC  | 2m | Plastic | Polyethylene | -30°c to +115°c | Ø 1 | 30R | Ø 1 | 460 | 270 | 80 |
| FTSV82BC 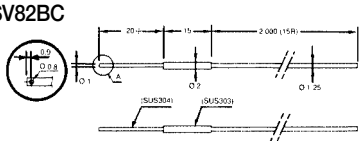 90° | 2m | Plastic | Polyethylene | -30°c to +70°c | Ø 0.5 | Do Not Bend Nose Fibre - 15R | Ø 0.5 | 70 | 40 | 15 |
| FTL716BC  | 2m | Plastic | Polyethylene | -30°c to +70°c | 0.267X16 | 30R | - | 400 | 220 | 80 |
| FU712BC  | 2m | Plastic | Polyethylene | -30°c to +70°c | Ø 1 | 30R | Ø 1 | 12 | 12 | 12 |
| FTV7BC  90° | 2m | Plastic | Polyethylene | -30°c to +70°c | Ø 1 | 30R | Ø 2 | 460 | 270 | 80 |
| FTV74BC  90° | 2m | Plastic | Polyethylene | -30°c to +70°c | Ø 1 | 30R | Ø 2 | 460 | 270 | 80 |
| FTVW7YBC  | 1m | Plastic | Polyethylene | -30°c to +70°c | Ø 1 | 1R | Ø 0.2 | 1000 | - | - |