


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0347083093](#)
Status: **Active**
Overview: [Stac64 Single, Multi-Pocket and Hybrid Header System](#)
Description: Stac64 3 Bay Right-Angle Headers, 40 Circuits, Bay A 16 Circuit Signal Header, Polarization B, Gray; Bay B 16 Circuit Signal Header, Polarization A, Black; Bay C 8 Circuit Signal Header, Polarization A, Black; Tray

Documents:

3D Model	Packaging Specification PK-31300-892-001 (PDF)
3D Model (PDF)	Brochure (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

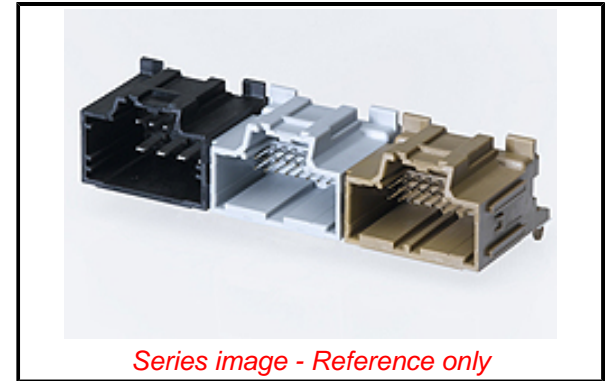

General

Product Family	PCB Headers
Series	34708
Application	Automotive, Power, Wire-to-Board
Comments	Bay A 16 Circuits Stac64 Right Angle Signal Header, Polarization B. Bay B 16 Circuits Stac64 Right Angle Signal Header, Polarization A. Bay C 8 Circuits Stac64 Right Angle Signal Header, Polarization A
Overview	Stac64 Single, Multi-Pocket and Hybrid Header System
Product Name	Stac64
UPC	884982560697

Physical

Breakaway	No
Circuits (Loaded)	40
Circuits (maximum)	40
Color - Resin	Black, Gray
Durability (mating cycles max)	10
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	20.144/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	3.36mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Yes
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +100°C
Termination Interface: Style	Through Hole

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2020)4578-DC (25
June 2020)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Compliant

Not Contained

Search Parts in this Series

[34708](#) Series

Mates With

[31408](#) USCAR 2.54mm (.100") Pitch Receptacle, [31372](#) 5.25mm (.206") Pitch Hybrid Receptacle Assembly, [34729](#) 2.54mm (.100") Pitch Stac64 Right Angle Receptacle

Electrical

Current - Maximum per Contact	Contact Molex
Voltage - Maximum	500V

Solder Process Data

Duration at Max. Process Temperature (seconds)	040
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260

Material Info**Reference - Drawing Numbers**

Packaging Specification	PK-31300-892-001
Sales Drawing	SD-34708-300-001

This document was generated on 07/27/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION