

Specifications

Contact Rating : 5A with resistive load @ 120V AC or 28V DC
2A with resistive load @ 250 VAC

Electrical Life : 50,000 make-and-break cycles at full load

Contact Resistance : 10mΩ max. initial @ 2V DC to 4V DC
100mill Amp for both coin silver and gold plated contacts.

Insulation Resistance : 1,000MΩ min.

Dielectric Strength : 1,000V_{RMS} @ sea level

Operating Temperature : -30°C to 85°C

Materials:

Case : Melamine or diallyl phthalate (DAP)

Toggle Handle : Brass, Chrome Plated

Bushing : Brass, Nickel Plated

Housing : Stainless Steel

End Contact : Coin Silver, Silver Plated


End Terminal : Brass, Silver Plated

Centre Contact & Terminal : Brass, Silver Plated Epoxy Sealed Terminals

Includes : Hex Nut, Lock Washer & Locking Ring



Diagram

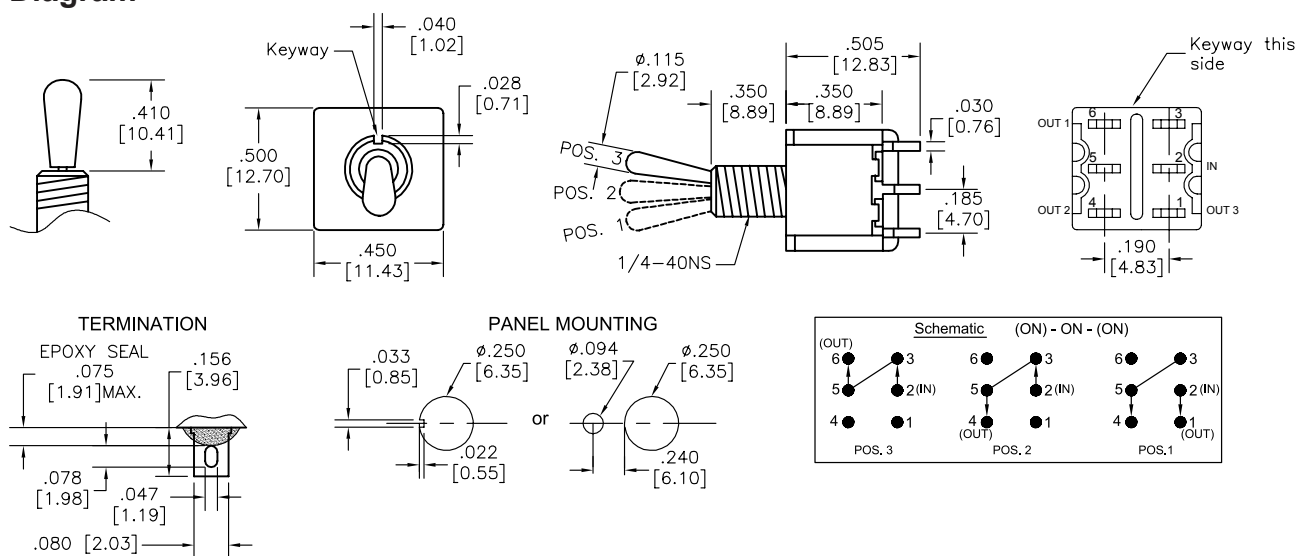

Dimensions : Millimetres (Inches)

Part Number Table

Description	Part Number
Toggle Switch, (On)-On-(On), DPDT, Non Illuminated, 5A, Panel Mount	SPC4999

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.