

SECTION 1D FUSED TERMINAL BLOCKS

TECHNICAL DATA

Mouldings:	Nylon 6.6, grey, UL94 V2, (fuseholder black)
Inserts:	Tinned brass
Fuse contacts:	Stainless steel
Screws:	M3 x 6, steel, zinc plated and yellow chromated
Wire protectors:	Stainless steel
Maximum working temp:	100°C continuous
Current rating:	10 amp to EN60335-1
Voltage rating:	Terminal block - 380V Fuseholder - 250V
Conductor size:	
Without wire protector:	Up to 6mm ²
With wire protector :	Up to 2.5mm ²
Fuse size:	20mm x 5mm
Fixing centres:	Peg to earth screw - 15mm Peg to fixing hole - 20mm

OPTIONS

Marking: special printing available. Please provide sketch.

Covers: see page 62.

Fuses: see catalogue 2 section I for details.

High Temperature: details upon request.

FEATURES


Series 503SI fused terminal blocks are available in unearthed versions from 1 to 5 pole and earthed versions from 3 to 5 pole. A common dovetail enables mixed assemblies to be constructed by clipping on additional 1 pole lengths to provide multiple versions of fused and unfused terminals. All variations can be supplied with or without wire protectors.

Earth Screws & Washers (Optional)

Screws: 503SIES - M3x12, Posi

Washers: 503SITW - M3

APPROVALS

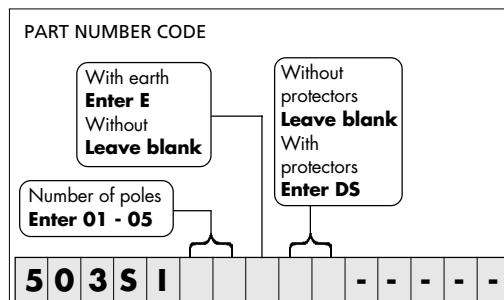

01273 431600



01273 439288



sales@metway.co.uk