


Product Name: Gravity IO Expansion Shield for LattePanda


Introduction

This Gravity I/O expansion shield, which is made for LattePanda, breakouts all GPIO pins to make it compatible with standard Arduino device and no interruption with other ports on LattePanda. Each pin has VCC and GND power port, compatible with Gravity-3Pin Color coded interface, supports hundreds of sensors and modules.

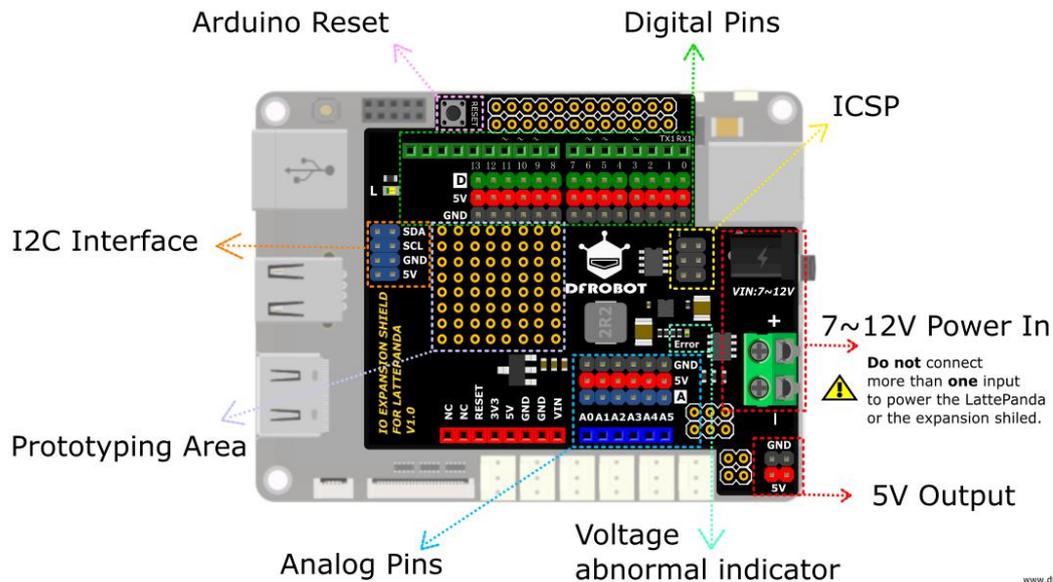

Gravity IO Expansion Shield for LattePanda Pinout

And this shield also adds a new power solution for LattePanda. You can use a 7~12V wide range power supply to power the board and devices via DC 2.1 or DC terminal port, maximum 5A under 5V IO output All make the shield perfect for using LattePanda to learning and developing.

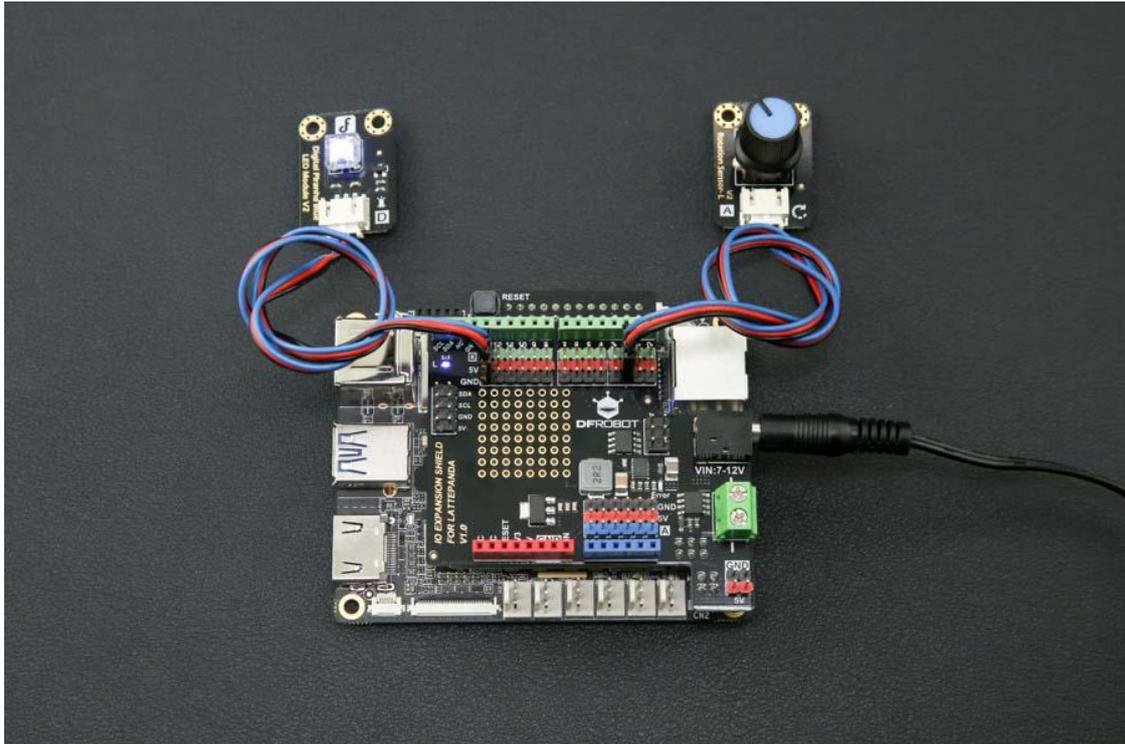

LattePanda with Gravity IO Expansion Shield

Note:

1. The two power terminals are connected to each other. Do not connect external power at the same time
2. When using 7 ~ 12V external power supply, do not repeat power LattePanda via USB

Specification

LattePanda Compatible

Arduino Leonardo Compatible

Gravity sensor Compatible

Input Voltage: 7~12V

Input interface: DC 2.1; 2-pin wire.

Digital Gravity interface x14

Analog Gravity interface x6

IIC port x2

ICSP port x1

Output Voltage: 5V

I/O Operating Voltage: 5V

5V Port Maximum Output Current: 5A

3.3V Port Maximum Output Current: 1A

8x8 general 2.54mm prototype pad
Dimension: 70mm x 68mm / 2.76in x 2.68in

Shipping list

Gravity IO Expansion Shield for LattePanda x1

Documents

Schematic

【 https://github.com/Arduinolibrary/LattePanda_Gravity_IO_Expansion_Shield/raw/master/Gravity%20IO%20Expansion%20Shield%20for%20LattePanda%20Schematic.pdf】

3D file

【 https://github.com/Arduinolibrary/LattePanda_Gravity_IO_Expansion_Shield/raw/master/3D%20Files.pdf】