

(<https://www.dfrobot.com/product-1697.html>)

## Introduction

DFRobot's BME680 Environmental Sensor is a low power gas, pressure, temperature & humidity sensor based on BOSCH BME680 sensor. It is a 4-in-1 multi-functional MEMS environmental sensor which integrates VOC (Volatile Organic Compounds) sensor, temperature sensor, humidity sensor and barometer.

With DFRobot Gravity BME680 Environmental Sensor, you can monitor 4 environmental parameters simultaneously. It is designed for air quality monitor systems, and due to the MEMS technology the BME680 has a small size and low power consumption. It can be widely used in environmental monitoring, home automation and control, Internet of Things (IoT) wearable device, GPS enhancement, etc.

DFRobot Gravity BME680 environmental sensor provides a Gravity I2C connector, plug & play feature, and is easy to connect. With onboard voltage regulator IC and level translator IC, DFRobot Gravity BME680 environmental sensor has flexible compatibility. It can be directly connected to 3.3V and 5V systems. Moreover, there is also a SPI connector for further expansion projects.

With the development of industrialization, air pollution is getting worse and worse. Toxic chemical odors are even common with new furniture. These invisible killers are destroying your health day by day. You do need to concern about your health as soon as possible and DFRobot Gravity BME680 environmental sensor can help make an air quality monitor for this purpose. DFRobot Gravity BME680 can help you take care of your health!

## Specification


[https://wiki.dfrobot.com/Gravity\\_\\_I2C\\_BME680\\_Environmental\\_Sensor\\_\\_VOC,\\_Temperature,\\_Humidity,\\_Barometer\\_\\_SKU\\_\\_SEN0248](https://wiki.dfrobot.com/Gravity__I2C_BME680_Environmental_Sensor__VOC,_Temperature,_Humidity,_Barometer__SKU__SEN0248)

- Input Voltage: 3.3V~5.0V
- Operating Current: 5mA (25mA in VOC)
- Wire Connector: Gravity I2C
- Connector in Reserve: SPI
- Temperature Measurement Range: -40°C~ 85°C
- Temperature Measurement Precision: ±1.0°C(0~65°C)
- Humidity Measurement Range: 0-100%r.H
- Humidity Measurement Precision: ±3%r.H.(20-80% r.H.,25°C)
- Atmospheric Pressure Measurement Range: 300-1100hPa
- Atmospheric Pressure Measurement Precision: ±0.6hPa(300-1100hPa,0~65°C)
- IAQ (Indoor Air Quality) Range: 0-500 (the larger the worse)
- Module Size: 30 × 22(mm) / 1.18 x0.87(inches)

## IAQ (Indoor Air Quality) Sheet

IAQ Index	Air Quality
0 – 50	good <sup>10</sup>
51 – 100	average
101 – 150	little bad
151 – 200	bad
201 – 300	worse <sup>2</sup>
301 – 500	very bad

## Board Overview

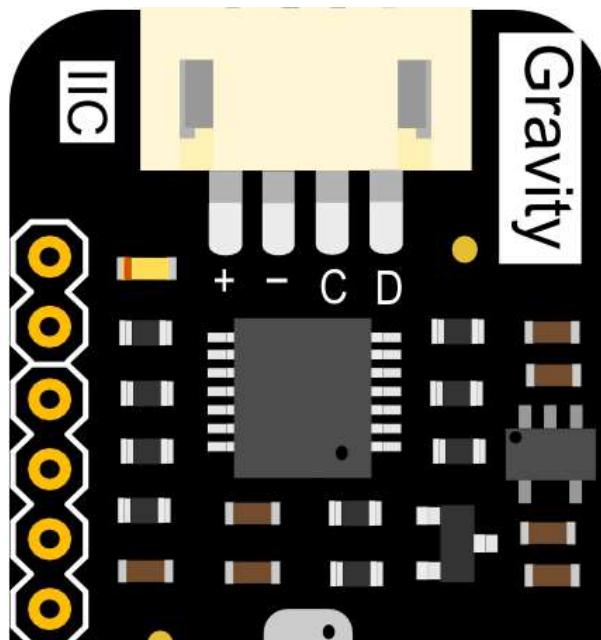



Num	Label	Description
+	VCC	Power Input(3.3~5.0V)
-	GND	Power Ground(0V)
C	SCL	I2C Clock Signal
D	SDA	I2C Data Signal

## Tutorial

This tutorial will demonstrate how to use this sensor. Currently, only FireBeetle ESP8266 IOT Microcontroller (<https://www.dfrobot.com/product-1634.html>) can read IAQ values, other main controllers are not supported at this time.

## Requirements


- **Hardware**
  - DFRduino UNO R3 (<https://www.dfrobot.com/product-838.html>) (or similar) x 1
  - DFRobot Gravity BME680 environmental sensor x1
  - Gravity 4Pin Sensor wire (or Dupont wires) x1
- **Software**
  - Arduino IDE (V1.0.x or V1.8.x), Click to Download Arduino IDE from Arduino® (<https://www.arduino.cc/en/Main/Software>)
  - Download and install the **BME680 Library** ([https://github.com/DFRobot/DFRobot\\_BME680](https://github.com/DFRobot/DFRobot_BME680)). How to install the library? (<https://www.arduino.cc/en/Guide/Libraries#.UxU8mdzF9H0>)

## Connection Diagram

This product supports both IIC and SPI wiring connector. Please select suitable connector according to the wiring. Below is the connection diagram for your reference.  
IIC wiring connector is recommended, since it is plug & play and easy to use.


### IIC Connection Diagram

You must pay attention to the wiring order, VCC to Power Supply, GND to Ground.

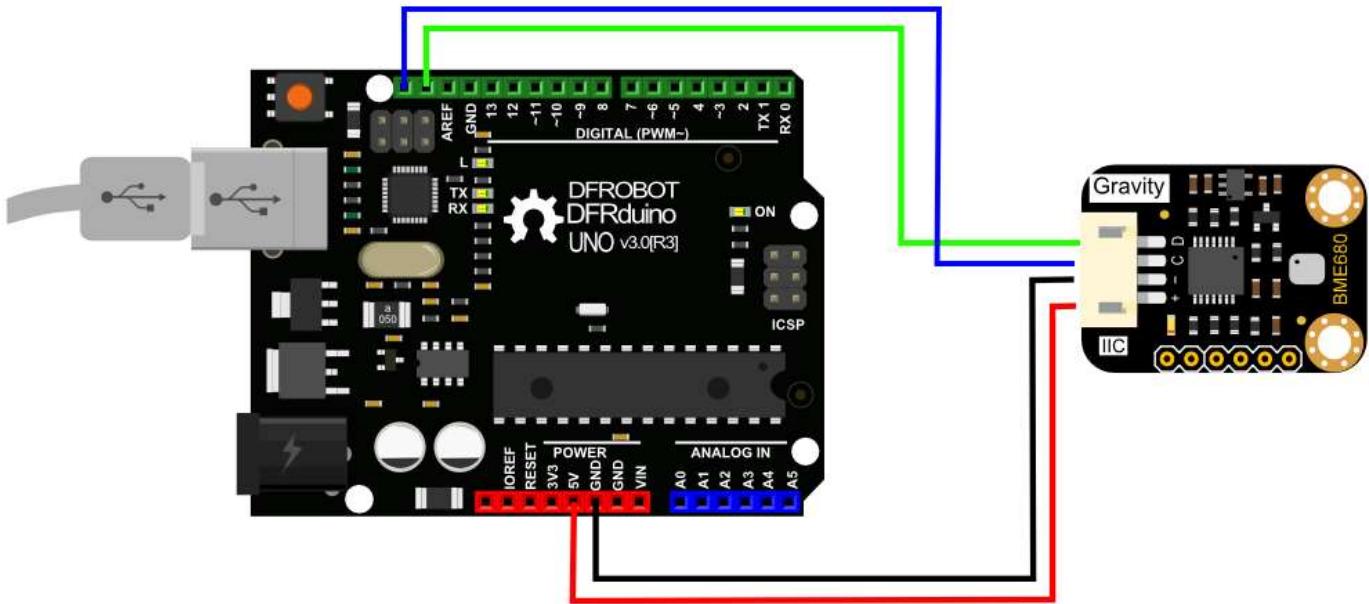

## SPI Connection Diagram

You must pay attention to the wiring order, VCC to Power Supply, GND to Ground.

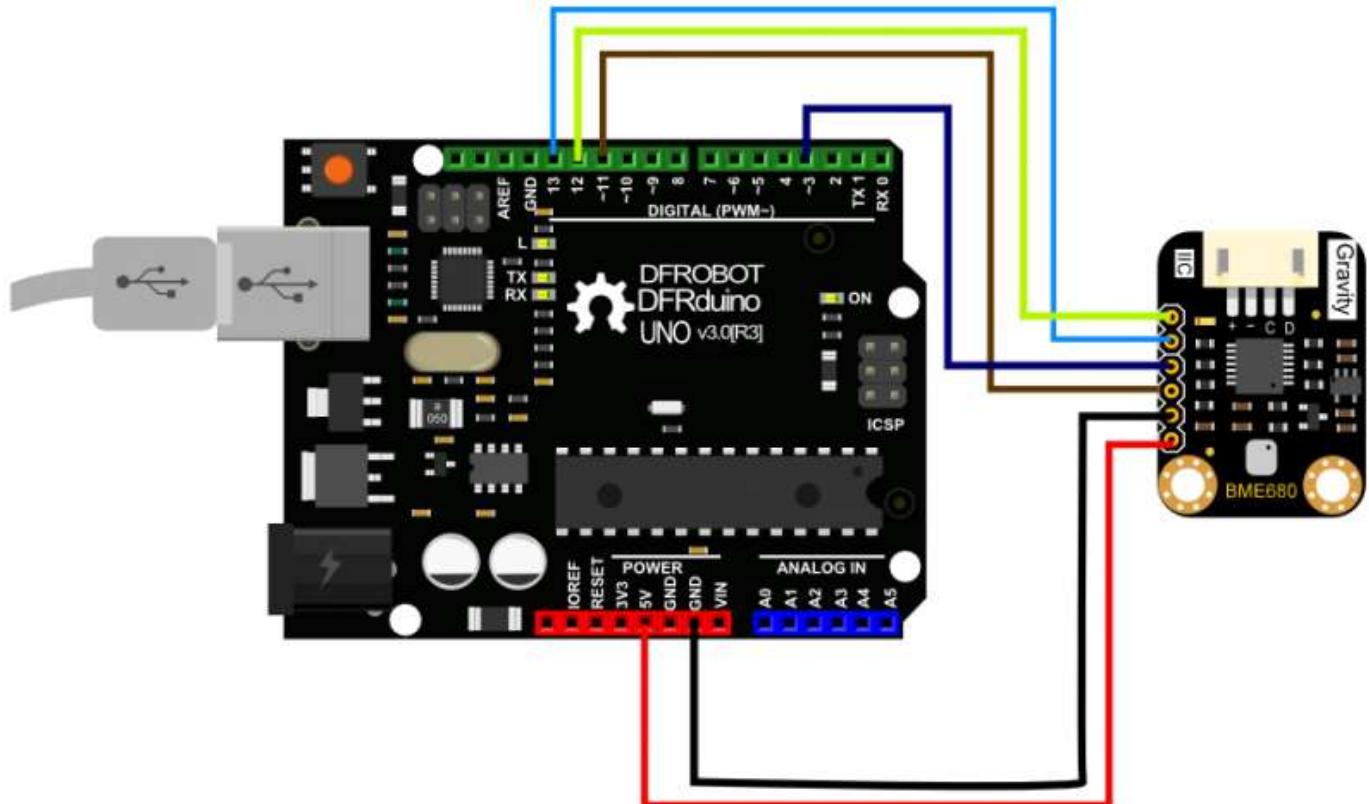

## Sample Code

Download and install the **BME680 Library** ([https://github.com/DFRobot/DFRobot\\_BME680](https://github.com/DFRobot/DFRobot_BME680))  
[https://wiki.dfrobot.com/Gravity\\_\\_I2C\\_BME680\\_Environmental\\_Sensor\\_\\_VOC,\\_Temperature,\\_Humidity,\\_Barometer\\_\\_SKU\\_\\_SEN0248](https://wiki.dfrobot.com/Gravity__I2C_BME680_Environmental_Sensor__VOC,_Temperature,_Humidity,_Barometer__SKU__SEN0248)

[<https://www.arduino.cc/en/Guide/Libraries#.UxU8mdzF9H0>]

(<https://www.arduino.cc/en/Guide/Libraries#.UxU8mdzF9H0>)| How to install Libraries in Arduino IDE] This sample code is based on IIC connector. Please check file: DFRobot\_BME680\_SPI.ino for

sample code for SPI connector in the library file. Because SPI sample code realizes the same function, it will not be shown at here. Calibration is needed to monitor altitude value exactly. So that please fill in the sample code with correct local altitude value:

```
seaLevel = bme.readSeaLevel (your correct local altitude value)
```

## Without IAQ

Program Function: read data from BME680 sensor and serial printing(without IAQ).

```
#include "DFRobot_BME680_I2C.h"
#include "Wire.h"
#include "SPI.h"

/*use an accurate altitude to calibrate sea level air pressure*/
#define CALIBRATE_PRESSURE

DFRobot_BME680_I2C bme(0x77); //0x77 I2C address

float seaLevel;
void setup()
{
    Serial.begin(115200);
    while(!Serial);
    delay(1000);
    Serial.println();
    Serial.print(bme.begin());
    #ifdef CALIBRATE_PRESSURE
    bme.startConvert();
    delay(1000);
    bme.update();
    /*You can use an accurate altitude to calibrate sea level air pressure.
     *And then use this calibrated sea level pressure as a reference to obtain the calibrated
     *In this case,525.0m is chendu accurate altitude.
     */
    seaLevel = bme.readSeaLevel(525.0);
    Serial.print("seaLevel :");
    Serial.println(seaLevel);
    #endif
}

void loop()
{
    bme.startConvert();
    delay(1000);
    bme.update();
    Serial.println();
    Serial.print("temperature(C) :");
    Serial.println(bme.readTemperature(), 2);
    Serial.print("pressure(Pa) :");
    Serial.println(bme.readPressure());
    Serial.print("humidity(%rh) :");
    Serial.println(bme.readHumidity(), 2);
    Serial.print("gas resistance(ohm) :");
    Serial.println(bme.readGasResistance());
    Serial.print("altitude(m) :");
    Serial.println(bme.readAltitude());
    #ifdef CALIBRATE_PRESSURE
    Serial.print("calibrated altitude(m) :");
    
```

```
    Serial.println(bme.readCalibratedAltitude(seaLevel));  
#endif  
}
```

## With IAQ

Program Function: read data from BME680 sensor and serial printing(with IAQ). At present, only FireBeetle ESP8266 IOT Microcontroller (<https://www.dfrobot.com/product-1634.html>) can read IAQ, other controllers can not support. For FireBeetle ESP8266 IOT Microcontroller,please use Arduino IDE 1.8.x. Then update the SDK to 2.3.1 or above. Refer to section 4.2 of the FireBeetle ESP8266 Wiki

([https://www.dfrobot.com/wiki/index.php/FireBeetle\\_ESP8266\\_IOT\\_Microcontroller\\_SKU:\\_DFR0489](https://www.dfrobot.com/wiki/index.php/FireBeetle_ESP8266_IOT_Microcontroller_SKU:_DFR0489)) for the tutorial.

```
#include "DFRobot_BME680_I2C.h"
#include "Wire.h"

/*use an accurate altitude to calibrate sea level air pressure*/
#define CALIBRATE_PRESSURE

DFRobot_BME680_I2C bme(0x77); //0x77 I2C address

float seaLevel;
void setup()
{
    uint8_t      rs1t = 1;
    Serial.begin(115200);
    while(!Serial);
    delay(1000);
    Serial.println();
    while(rs1t != 0) {
        rs1t = bme.begin();
        if(rs1t != 0) {
            Serial.println("bme begin faild");
            delay(2000);
        }
    }
    Serial.println("bme begin successful");
    bme.supportIAQ();
}

void loop()
{
    static uint8_t      firstCalibrate = 0;

    #ifdef CALIBRATE_PRESSURE
    if(firstCalibrate == 0) {
        if(bme.iaqUpdate() == 0) {
            /*You can use an accurate altitude to calibrate sea level air pressure.
             *And then use this calibrated sea level pressure as a reference to obtain the calib
             *In this case,525.0m is chendu accurate altitude.
             */
            seaLevel = bme.readSeaLevel(525.0);
            Serial.print("seaLevel :");
            Serial.println(seaLevel);
            firstCalibrate = 1;
        }
    }
    #else
        firstCalibrate = 1;
    #endif
}
```

```
if(firstCalibrate) {  
    uint8_t rslt = bme.iaqUpdate();  
    if(rslt == 0) {  
        Serial.println();  
        Serial.print("time(ms) :");  
        Serial.println(millis());  
        Serial.print("temperature(C) :");  
        Serial.println(bme.readTemperature(), 2);  
        Serial.print("pressure(Pa) :");  
        Serial.println(bme.readPressure());  
        Serial.print("humidity(%rh) :");  
        Serial.println(bme.readHumidity(), 2);  
        Serial.print("altitude(m) :");  
        Serial.println(bme.readAltitude());  
  
#ifdef CALIBRATE_PRESSURE  
    Serial.print("calibrated altitude(m) :");  
    Serial.println(bme.readCalibratedAltitude(seaLevel));  
#endif  
    Serial.print("gas resistance :");  
    Serial.println(bme.readGasResistance());  
    if(bme.isIAQReady()) {  
        Serial.print("IAQ :");  
        float iaq = bme.readIAQ();  
        Serial.print(iaq);  
        if(iaq < 50) Serial.println(" good");  
        else if(iaq < 100) Serial.println(" average");  
        else if(iaq < 150) Serial.println(" little bad");  
        else if(iaq < 200) Serial.println(" bad");  
        else if(iaq < 300) Serial.println(" worse");  
        else Serial.println(" very bad");  
    } else Serial.println("IAQ not ready, please wait about 5 minutes");  
    }  
}  
}
```

## Without IAQ

```
temperature(C) :22.00
pressure(Pa) :95945.00
humidity(%rh) :70.45
gas resistance(ohm) :13259.00
altitude(m) :470.61
calibrated altitude(m) :523.07

temperature(C) :22.01
pressure(Pa) :95946.00
humidity(%rh) :70.34
gas resistance(ohm) :13567.00
altitude(m) :470.52
calibrated altitude(m) :522.98

temperature(C) :22.03
pressure(Pa) :95943.00
humidity(%rh) :70.24
gas resistance(ohm) :13853.00
altitude(m) :470.78
calibrated altitude(m) :523.24

temperature(C) :22.04
pressure(Pa) :95944.00
humidity(%rh) :70.15
gas resistance(ohm) :14048.00
altitude(m) :470.69
calibrated altitude(m) :523.16
```

## With IAQ

```

time(ms) :300003
temperature(C) :21.00
pressure(Pa) :96320.00
humidity(%rh) :37.00
altitude(m) :438.15
calibrated altitude(m) :521.95
gas resistance :8700.00
IAQ not ready, please wait about 5 minutes

time(ms) :302816
temperature(C) :21.00
pressure(Pa) :96320.00
humidity(%rh) :37.00
altitude(m) :438.15
calibrated altitude(m) :521.95
gas resistance :8629.00
IAQ :25.00 good

time(ms) :305630
temperature(C) :21.00
pressure(Pa) :96322.00
humidity(%rh) :37.00
altitude(m) :437.98
calibrated altitude(m) :521.78
gas resistance :8665.00
IAQ :21.00 good

```

## Arduino Library Functions List

- Create a bme object and write to IIC address.

```
DFRobot_BME680_I2C bme(0x77);
```

- Initialize BME680 and library

```
begin();
```

- Start data converting

```
startConvert();
```

- Read converted data

```
update();
```

- support reading the IAQ

```
supportIAQ();
```

- Start data converting with IAQ

```
iaqUpdate();
```

- Query whether the IAQ conversion is complete. If Completed return 1, else return 0.

```
isIAQReady();
```

- Get temperature data, unit of °C, precision of 0.01°C

```
readTemperature();
```

- Get atmosphere pressure, unit of pa, precision of 0.01pa

```
readPressure();
```

- Get humidity, unit of %rh, precision of 0.01%rh

```
readHumidity();
```

- Get resistance value of gas-resistance, unit of ohm, precision of 0.01ohm

```
readGasResistance();
```

- Get altitude, unit of m, precision of 0.01m

```
readAltitude();
```

- Get sea level atmosphere pressure reference value and send altitude data

```
readSeaLevel(float altitude);
```

- Get calibrated altitude value and send atmosphere pressure reference value

```
readCalibratedAltitude(float seaLevel);
```

## Compatibility Test

MCU	Pass	Fail	Untested	Note
FireBeetle-Board328P	√			Do Not Support IAQ
FireBeetle-ESP32	√			Do Not Support IAQ
FireBeetle-ESP8266	√			Support IAQ
Leonardo	√			Do Not Support IAQ

## FAQ

For any questions, advice or cool ideas to share, please visit the DFRobot Forum  
(<https://www.dfrobot.com/forum/>).

## More Documents

- [Schematic]  
([https://github.com/Arduinolibrary/DFRobot\\_Gravity\\_I2C\\_BME680\\_Environmental\\_Sensor/raw/master/BME680](https://github.com/Arduinolibrary/DFRobot_Gravity_I2C_BME680_Environmental_Sensor/raw/master/BME680)  
([https://github.com/Arduinolibrary/DFRobot\\_Gravity\\_I2C\\_BME680\\_Environmental\\_Sensor/raw/master/BME680](https://github.com/Arduinolibrary/DFRobot_Gravity_I2C_BME680_Environmental_Sensor/raw/master/BME680)) Environmental Sensor\_V1.0\_Schematic.pdf)
- [Layout]  
([https://github.com/Arduinolibrary/DFRobot\\_Gravity\\_I2C\\_BME680\\_Environmental\\_Sensor/raw/master/BME680](https://github.com/Arduinolibrary/DFRobot_Gravity_I2C_BME680_Environmental_Sensor/raw/master/BME680)  
([https://github.com/Arduinolibrary/DFRobot\\_Gravity\\_I2C\\_BME680\\_Environmental\\_Sensor/raw/master/BME680](https://github.com/Arduinolibrary/DFRobot_Gravity_I2C_BME680_Environmental_Sensor/raw/master/BME680)) Environmental Sensor\_V1.0\_Layout.pdf)
- BME680 Datasheet  
([https://github.com/Arduinolibrary/DFRobot\\_Gravity\\_I2C\\_BME680\\_Environmental\\_Sensor/raw/master/BST-BME680-DS001-00.pdf](https://github.com/Arduinolibrary/DFRobot_Gravity_I2C_BME680_Environmental_Sensor/raw/master/BST-BME680-DS001-00.pdf))
- 74HC125PW Datasheet  
([https://github.com/Arduinolibrary/DFRobot\\_Gravity\\_I2C\\_BME680\\_Environmental\\_Sensor/raw/master/74HC125PW-Datasheet.pdf](https://github.com/Arduinolibrary/DFRobot_Gravity_I2C_BME680_Environmental_Sensor/raw/master/74HC125PW-Datasheet.pdf))

w/master/74HC125PW\_datasheet.pdf)



Get Gravity: I2C BME680 Environmental Sensor (<https://www.dfrobot.com/product-1697.html>) from DFRobot Store or **DFRobot Distributor**. (<https://www.dfrobot.com/index.php?route=information/distributorslogo>)

**Turn to the Top**