


MCCOG128064B12W-BNMLW	128 x 64	N/A	LCD Module
Specification			
Version: 1		Date: 31/10/2016	
Revision			

Display Features					
Resolution	128 x 64				
Appearance	White on Blue				
Logic Voltage	3.3V				
Interface	Parallel / SPI				
Font Set	N/A				
Display Mode	Transmissive				
LC Type	BSTN				
Module Size	54.60 x 42.20 x 4.33				
Operating Temperature	-20°C ~ +70°C				
Construction	COG	Box Quantity	Weight / Display		
LED Backlight	White	—	---		


* - For full design functionality, please use this specification in conjunction with the ST7565P specification. (Provided Separately)

Display Accessories	
Part Number	Description
MCIB-12	UNO 32 Breakout Board with SD Card and LED BKL driver.
MPBV-7	30-Way FFC to Cable and Wires 0.5mm Pitch.

Optional Variants	
Appearances	Voltage
Black on White Black on Yellow/Green Black on RGB	



Mechanical Specifications					
Module Size	54.60 x 42.20 x 4.33 (With Backlight)				W x H x D mm
Viewing Area	50.60 x 31.00	W x H mm	Hole-to-Hole	---	W x H mm
Dot Size	---	W x H mm	Dot Pitch	---	W x H mm

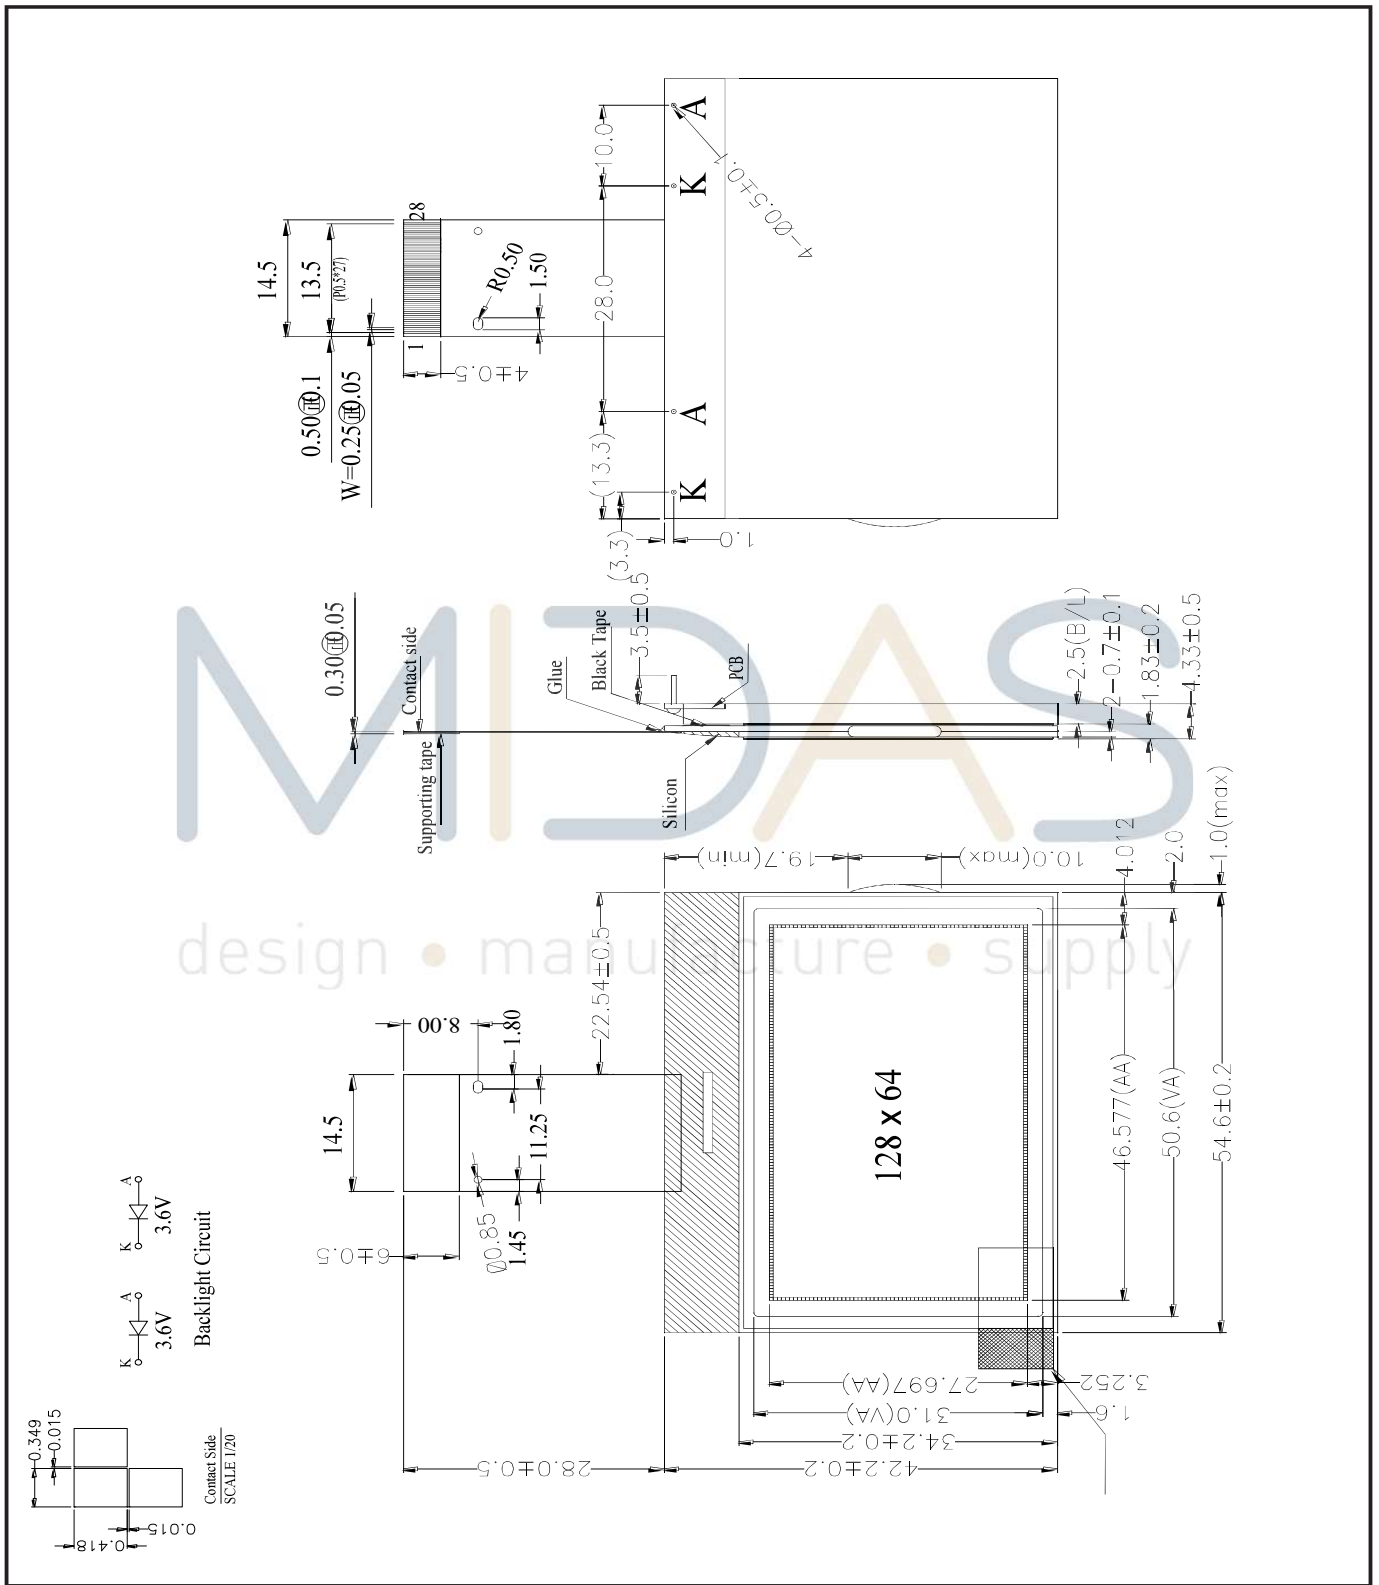

MCCOG128064B12W-BNMLW	128 x 64	N/A	LCD Module
Version: 1		Specification	Date: 31/10/2016
		Revision	



Pin layout

Pin	Symbol	Description	Remarks
1	P/S	P/S = H: Parallel Data I/O P/S = L: Serial Data Input	
2	C86	MPU Interface Selection Pin	
3	V0	Multi-Level power supply for LCD. Voltage applied is determined by LC cell, changed through resistive voltage divided or changing impedance using OP. AMP. Levels determined on VSS must maintain magnitudes shown: $V0 \geq V1 \geq V2 \geq V3 \geq V4 \geq VSS$	
4	V1		
5	V2		
6	V3		
7	V4		
8	C2-	DC/DC Converter. Capacitor between this terminal and CAP2P terminal.	
9	C2+	DC/DC Converter. Capacitor between this terminal and CAP2N terminal.	
10	C1+	DC/DC Converter. Capacitor between this terminal and CAP1N terminal.	
11	C1-	DC/DC Converter. Capacitor between this terminal and CAP1P terminal.	
12	C3+	DC/DC Converter. Capacitor between this terminal and CAP1N terminal.	
13	VOUT	Voltage Converter I/O	
14	VSS	Ground	
15	VDD	Power Supply	
16	D7	8-Bit bi-directional data bus, connect to 8-bit or 16-bit standard MPU data bus. SPI-4 is selected P/S = L D7 Serial data input (SI); D6 Serial Clock Input (SCL). D0~D5 connected to VDD or floating. When chip select not active, D0~D7 set to high impedance.	
17	D6		
18	D5		
19	D4		
20	D3		
21	D2		
22	D1		
23	D0		
24	E (/RD)	When connected to 8080MPU, Pin treated as the "/RD" signal of the 8080MPU and is LOW-active. Data bus output status when signal is "L". Connect 6800 MPU, pin treated as "E" signal of 6800 MPU, and is HIGH-active.	
25	R/W (/WR)	When connected to 8080MPU, Pin treated as the "/WR" signal of the 8080MPU and is LOW-active. Connect 6800 MPU, pin treated as "R/W" signal of 6800 MPU, decides access type: R/W = H: Read R/W = L: Write.	
26	D/C	Determines whether data bits are data or command.	
27	/CS1	Chip Select.	
28	/RES	/Res is "L", register settings initialised. Reset operation is performed by the /RES signal Level.	

MCCOG128064B12W-BNMLW	128 x 64	N/A	LCD Module
Specification			
Version: 1		Date: 31/10/2016	
Revision			



Absolute Maximums Ratings					
Item	Symbol	Minimum	Typical	Maximum	Unit
Power Supply Voltage	V0, VOUT	-0.3	---	14.5	V
Power Supply Voltage	V1,V2,V3,V4	-0.3	---	V0+0.3	V
Power Supply Voltage	VDD	-0.3	---	3.6	V
Operating Temperature	T _{OP}	-20°C	---	70°C	°C
Storage temperature	T _{ST}	-30°C	---	80°C	°C

Electronic Characteristics						
Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
---	---	---	---	---	---	---
---	---	---	---	---	---	---
---	---	---	---	---	---	V
Supply Voltage Logic	V _{DD} - V _{SS}	---	3.20	3.30	3.40	V
Supply Voltage LCD	V _{DD} - V ₀	T _a =25°C	8.60	8.80	9.00	V
Supply Current	I _{DD}	V _{DD} =3.3V	---	0.10	---	mA

LCD Characteristics						
For STN/FSTN LCD Panel Types						
Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Viewing Angle	Φ2 - Φ1	CR ≥ 2	—	—	45	ψ=180°
	Θ	—	—			
Contrast Ratio	CR	—	3	—	—	---
Response Time (Rise)	TR	—	—	—	250	ms
Response Time (Fall)	TF	—	—	—	250	ms

LED Characteristics						
Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Supply Current	I _{LED}	V=3.60V	---	32	40	mA
Supply Voltage	V	---	3.50	3.60	3.70	V
Reverse Voltage	VR	---	---	---	5	V
Luminance (Without LCD)	I _V	I _{LED} =32mA	640	800	---	Cd/m ²
---	---	---	---	---	---	---
LED Life Time	---	I _{LED} =32mA	---	50K	---	Hour

Attention: It is constant current, not constant voltage, which should be applied when driving the LED backlight, please ensure you adhere to this rule.

MCCOG128064B12W-BNMLW	128 x 64	N/A	LCD Module
Specification			
Version: 1		Date: 31/10/2016	
Revision			

