

# Enclosed Phone Jack

**multicomp** PRO

**RoHS  
Compliant**



## Specifications

### Electrical:

Contact Rating : 0.25A at 48V DC  
 Contact Resistance : 20mΩ Max. initial, 50  
 Insulation Resistance : 50,000MΩ Min. at 500V DC  
 Dielectric Strength : 500V AC for one minute



### Mechanical:

Insertion Force : 0.5 to 3.0 kg  
 Withdrawal Force : 0.5 to 3.0 kg  
 Operating Life : 10,000 cycles

### Environmental:

Operating Temperature : -40°C to 80°C

## Diagram

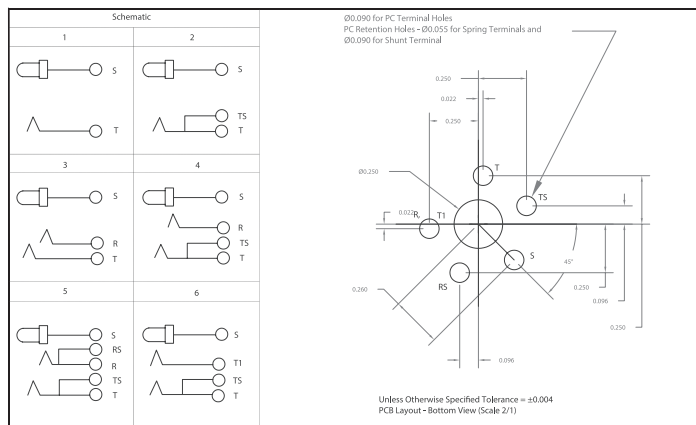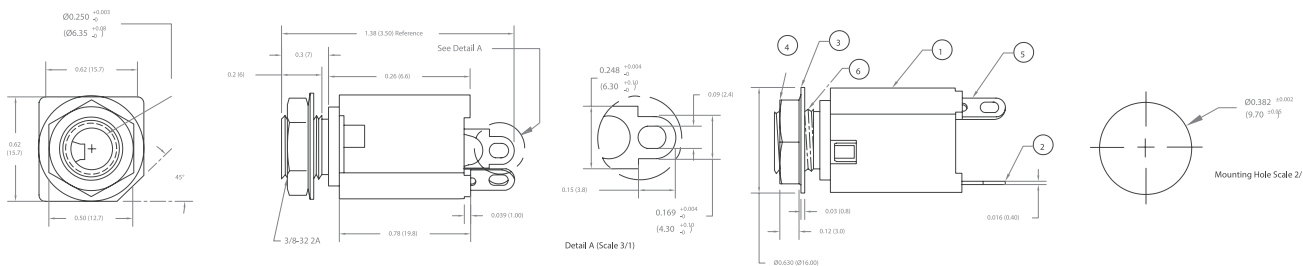

Item	Description	Material / Finish
1	Housing	ABS, UL94V-0
2	Tip Spring	Bronze - Tin Plated
3	Washer	Brass - Nickel Plated
4	Hex Nut	Brass - Nickel Plated
5	Sleeve Terminal	Brass - Tin Plated
6	Bushing	ABS, UL94V-0

## Part Number Table

Description	Part Number
Enclosed Phone Jack	SPC21403

Dimensions : Inches (Millimetres)

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro  
 Farnell.com/multicomp-pro  
 Element14.com/multicomp-pro

**multicomp** PRO