Carterclene (Anti-Static Foam Cleanser)

Product Code: CTC

PRODUCT DESCRIPTION

An extremely powerful, highly efficient anti-static foaming cleanser for surfaces prone to static dust attraction which has been specially developed for use on plastics, metal, glass and synthetic surfaces. This product is free of CFC solvents and propellants. **CTC** is available in 400ml 100% Ozone Friendly aerosol.


Carterclene contains a **flammable propellant** and should be used with care.


FEATURES

- * Highly efficient, hard surface cleaner removing heavy deposits of dirt and grime with little effort.
- * Powerful anti-static properties removing static charges from hard surfaces and preventing their reccurrence. Additionally, glass lenses treated with **CTC** will remain mist-free for long periods.
- * Safe on delicate plastics will not harm surfaces which may be attacked by solvents. Take care with metal surfaces as **Carterclene** has a relatively high pH. Reduce contact time on sensitive metals to a minimum.
- * **Carterclene** exhibits especially long-lasting foam characteristics.

TYPICAL PROPERTIES

Form: Density: pH: Boiling Point: Aqueous Liquid 0.97 11 - 12 >100°C (liquid contents)

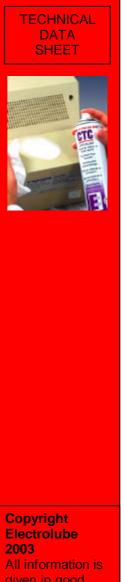

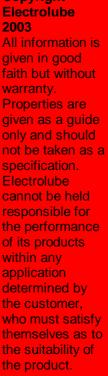



ELECTROLUBE, A division of H K Wentworth, Kingsbury Park, Midland Road, Swadlincote, Derbyshire, DE11 0AN Tel: +44(0) 1283-222111 Fax: +44(0) 1283-550177 www.electrolube.com ISO 9002 Registered Firm. Certificate No. FM 32082

<u>Carterclene</u> – Page 2

DIRECTIONS FOR USE

Shake the can well before use. Spray on surfaces to be treated and wipe away ingrained contamination. If necessary, re-spray, wiping gently to remove foam. It is recommended that **Safewipes (SWI100)**, specially developed cotton, lint-free cloths, are used in conjunction with this product. **Do not** spray onto live electrical contacts.

PACKAGING

ORDER CODE

400ml Aerosol 5 Litre CTC400H CTC05L (Bulk)

> Electrolube 2003 All information is given in good faith but without warranty. Properties are given as a guide only and should not be taken as a specification. Electrolube cannot be held responsible for the performance of its products within any application determined by the customer, who must satisfy

themselves as to the suitability of the product.

Copyright

TECHNICAL DATA

SHEET



ELECTROLUBE, A division of H K Wentworth, Kingsbury Park, Midland Road, Swadlincote, Derbyshire, DE11 0AN Tel: +44(0) 1283-222111 Fax: +44(0) 1283-550177 www.electrolube.com ISO 9002 Registered Firm. Certificate No. FM 32082