




DOCUMENT NUMBER AND REVISION
 VL-FS-BTHQ 42005VSS-04 REV. A
 (BTHQ 42005VSS-FSTF-06-LED WHITE (2 DIE))

DOCUMENT TITLE:
 SPECIFICATION
 OF
 LCD MODULE TYPE
 ITEM NO.: BTHQ 42005VSS-04

DEPARTMENT	NAME	SIGNATURE	DATE
PREPARED BY	PHILIP CHENG		2002/7/8
CHECKED BY	M.Y.LU		2002/07/08
APPROVED BY	CYRUS CHEUNG		2002/7/8

DISTRIBUTION LIST: MARKETING

DOCUMENT REVISION HISTORY 1:

DOCUMENT REVISION FROM TO	DATE	DESCRIPTION	CHANGED BY	CHECKED BY
A	2002.07.08	First Release.	PHILIP CHENG	M.Y.LU

CONTENTS

	<u>Page No.</u>
1. GENERAL DESCRIPTION	4
2. MECHANICAL SPECIFICATIONS	4
3. INTERFACE SIGNALS	6
4. ABSOLUTE MAXIMUM RATINGS	7
4.1 ELECTRICAL MAXIMUM RATINGS (Ta=25°C)	7
4.2 ENVIRONMENTAL CONDITION	7
5. ELECTRICAL SPECIFICATIONS	8
5.1 TYPICAL ELECTRICAL CHARACTERISTICS	8
5.2 TIMING SPECIFICATIONS	9
5.3 TIMING DIAGRAM OF VDD AGAINST V0	11
6. CHARACTER GENERATOR ROM(KS0066U-10B)	12
7. APPENDIX	13

**Specification
of
LCD Module Type
Item No.: BTHQ 42005VSS-04**

1. General Description

- 20 characters (5 x 8 dots) x 4 lines FSTN Positive Black & White Transflective LCD Character Module.
- Viewing Angle: 6 O'clock direction.
- Driving duty: 1/16 Duty, 1/5 bias.
- 'SAMSUNG' KS0066UP-10BCC (Die form) LCD Controller & Driver or equivalent.
- 'SAMSUNG' KS0065B-PCC (Die form) LCD Segment Drivers or equivalent.
- White LED05 backlight.

2. Mechanical Specifications

The mechanical detail is shown in Fig. 1 and summarized in Table 1 below.

Table 1

Parameter	Specifications	Unit
Outline dimensions	98.0(W) x 60.0(H) x 14.0 MAX.(D)	mm
Effective viewing area	76.0(W) x 25.2(H)	mm
Active area	70.35(W) x 20.74(H)	mm
Display format	20 characters x 4 lines	-
Character size	2.90(W) x 4.697(H) (5 x 8 dots)	mm
Character spacing	0.65(W) x 0.65(H)	mm
Character pitch	3.55(W) x 5.347(H)	mm
Dot size	0.568(W) x 0.574(H)	mm
Dot spacing	0.015(W) x 0.015(H)	mm
Dot pitch	0.583(W) x 0.589(H)	mm
Weight	TBD	grams

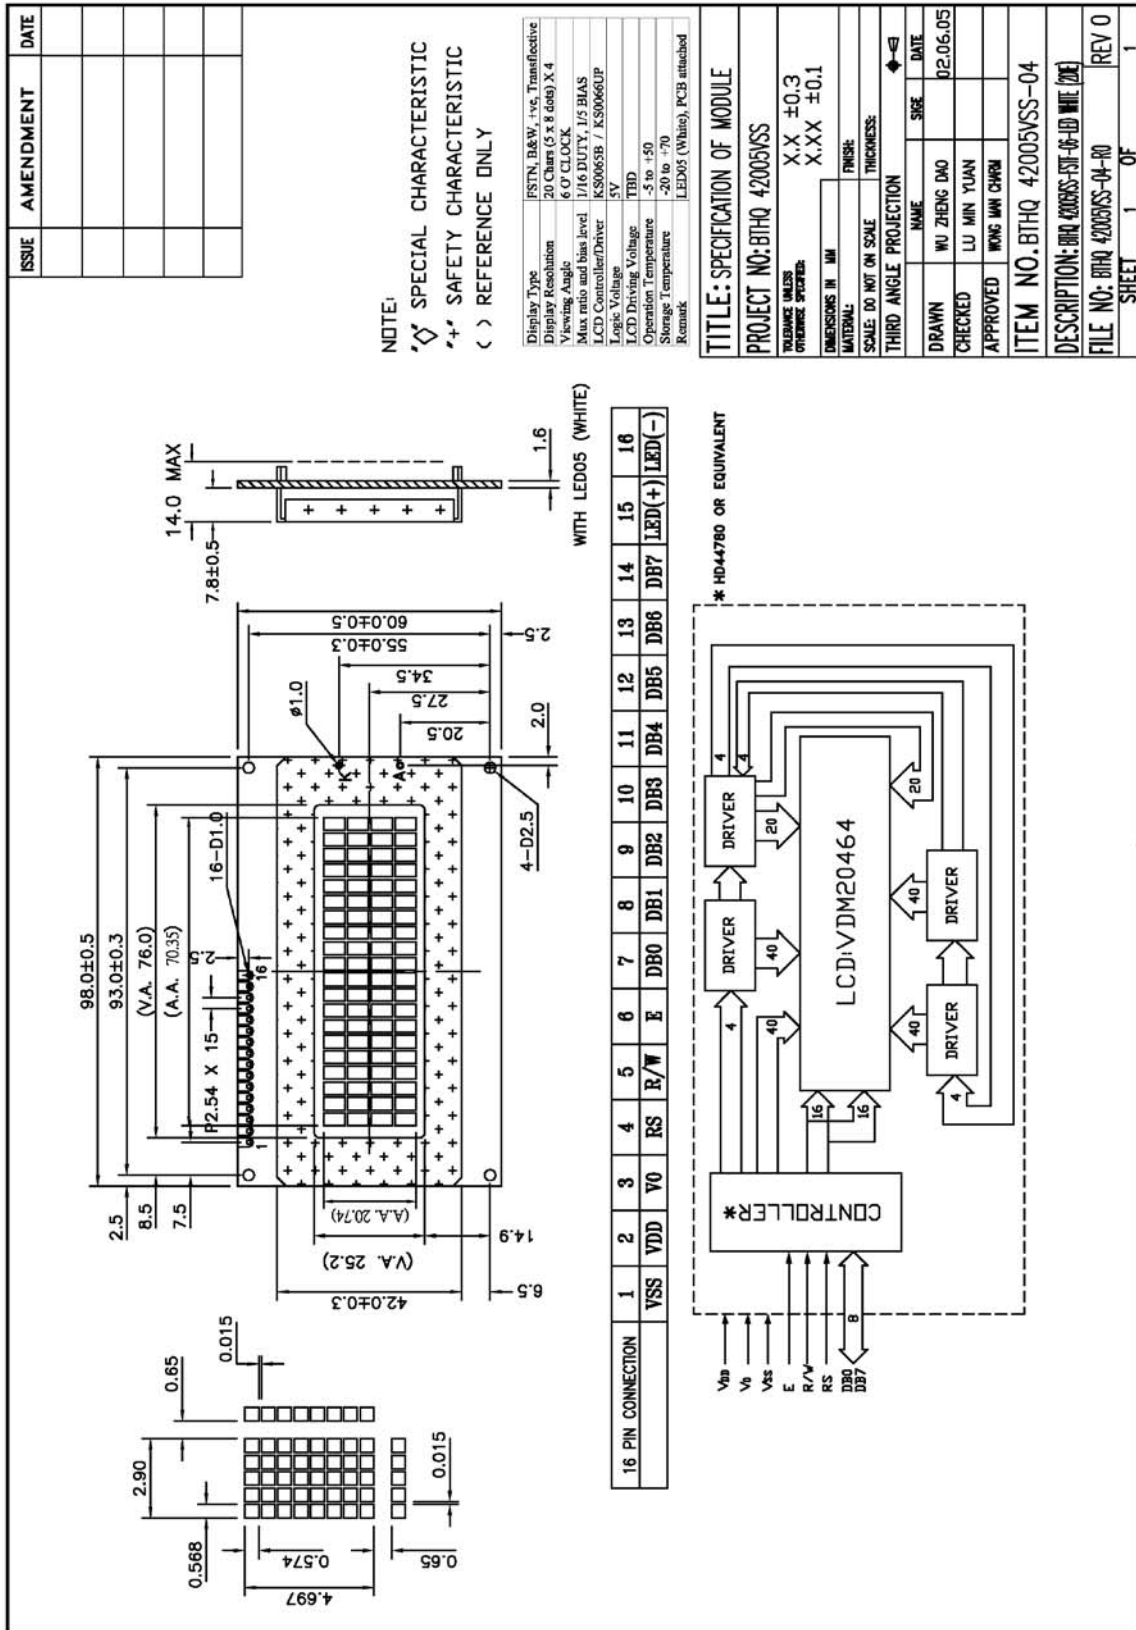


Figure 1: Module Specification

3. Interface signalsTable 2

Pin No.	Symbol	Description
1	VSS	Ground (0V).
2	VDD	Power supply for logic (+5.0V).
3	V0	Power supply for LCD driver.
4	RS	Register Select Input: "High" for Data register (for read and write). "Low" for Instruction register (for write), Busy flag, address counter (for read).
5	R/W	Read/Write signal: 'High' for Read mode. 'Low' for Write mode.
6	E	Enable. Start signal for data read /write.
7	DB0	Data input/output (LSB)
8	DB1	Data input/output
9	DB2	Data input/output
10	DB3	Data input/output
11	DB4	Data input/output
12	DB5	Data input/output
13	DB6	Data input/output
14	DB7	Data input/output (MSB)
15 or A	LED(+)	Anode of LED Backlight
16 or K	LED(-)	Cathode of LED Backlight

4. Absolute Maximum Ratings

4.1 Electrical Maximum Ratings(Ta = 25 °C)

Table 3

Parameter	Symbol	Min.	Max.	Unit
Power Supply voltage (Logic)	VDD-VSS	-0.3	+7.0	V
Power Supply voltage (LCD drive)	VLCD =VDD-V0	-0.3	+15.0	V
Input voltage	Vin	-0.3	VDD+0.3	V

Note:

The modules may be destroyed if they are used beyond the absolute maximum ratings.

All voltage values are referenced to VSS = 0V.

4.2 Environmental Condition

Table 4

Item	Operating Temperature (Topr)		Storage Temperature (Tstg)		Remark
	Min.	Max.	Min.	Max.	
Ambient Temperature	-5°C	+50°C	-20°C	+60°C	Dry
Humidity	95% max. RH for Ta ≤ 40°C < 95% RH for Ta > 40°C				no condensation
Vibration (IEC 68-2-6) cells must be mounted on a suitable connector	Frequency: 10 ~ 55 Hz Amplitude: 0.75 mm Duration: 20 cycles in each direction.				3 directions
Shock (IEC 68-2-27) Half-sine pulse shape	Pulse duration : 11 ms Peak acceleration: 981 m/s ² = 100g Number of shocks : 3 shocks in 3 mutually perpendicular axes.				3 directions

5. Electrical Specifications

5.1 Typical Electrical Characteristics

At Ta = 25 °C, VDD = 5V±5%, VSS=0V.

Table 5

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Supply voltage (Logic)	VDD -VSS		4.75	5.0	5.25	V
Supply voltage (LCD)	VLCD =VDD -V0	VDD = 5V, Note (1)	4.2	4.6	5.0	V
Input signal voltage for E,DB0-DB7,R/W,RS.	V _{IH}	"H" level	2.2	-	VDD	V
	V _{IL}	"L" level	-0.3	-	0.6	V
Supply Current (Logic & LCD)	IDD	Character mode, VDD=5V, Note 1	-	1.0	1.5	mA
		Checker board mode, VDD=5V, Note 1	-	1.2	1.8	mA
Supply Current (LCD)	I0	Character mode, VDD=5V, Note 1	-	0.2	0.3	mA
		Checker board mode, VDD=5V, Note 1	-	0.2	0.3	mA
Supply voltage of white LED05 backlight	VLED	Forward current =40mA Number of LED dies =1x2 =2 White backlight luminous intensity rank: S Colour rank: B	3.8	4.0	4.2	V

Note (1) : There is tolerance in optimum LCD driving voltage during production and it will be within the specified range.

5.2 Timing Specifications

At $T_a = -5\text{ }^{\circ}\text{C}$ To $+50\text{ }^{\circ}\text{C}$, $V_{DD} = +5V \pm 5\%$, $V_{SS} = 0V$.

Refer to Fig. 2, the bus timing diagram for write mode.

Table 6

Parameter	Symbol	Min.	Max.	Unit
E Cycle Time	t_c	500	-	ns
E Rise/Fall Time	t_R, t_F	-	20	ns
E Pulse Width(high, low)	t_w	230	-	ns
R/W and RS Setup Time	t_{SU1}	40	-	ns
R/W and RS Hold Time	t_{H1}	10	-	ns
Data Set-up Time	t_{SU2}	80	-	ns
Data Hold Time	t_{H2}	10	-	ns

Refer to Fig. 3, the bus timing diagram for read mode.

Table 7

Parameter	Symbol	Min.	Max.	Unit
E Cycle Time	t_c	500	-	ns
E Rise/Fall Time	t_R, t_F	-	20	ns
E Pulse Width(high, low)	t_w	230	-	ns
R/W and RS Setup Time	t_{SU}	40	-	ns
R/W and RS Hold Time	t_H	10	-	ns
Data Output Delay Time	t_D	-	120	ns
Data Hold Time	t_{DH}	5	-	ns

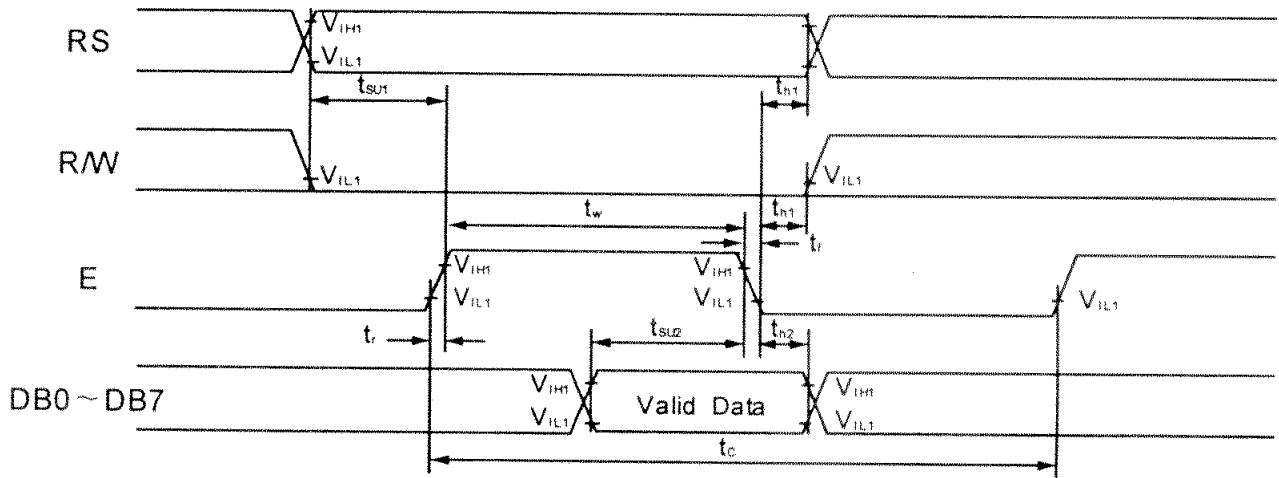


Figure 2: Write Mode Timing Diagram

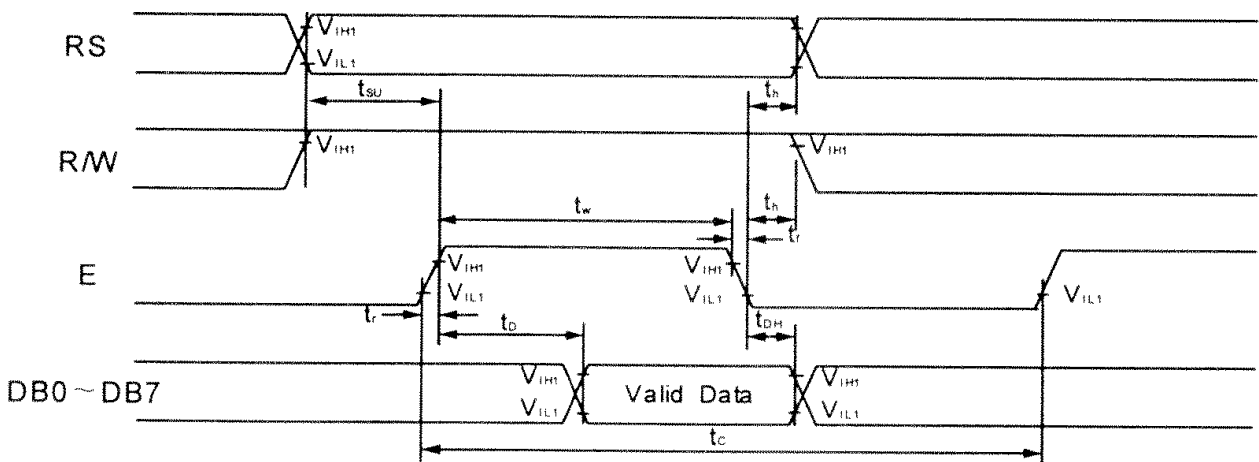


Figure 3: Read Mode Timing Diagram

5.3 Timing Diagram of VDD Against V0.

Power on sequence shall meet the requirement of Figure 4, the timing diagram of VDD against V0.

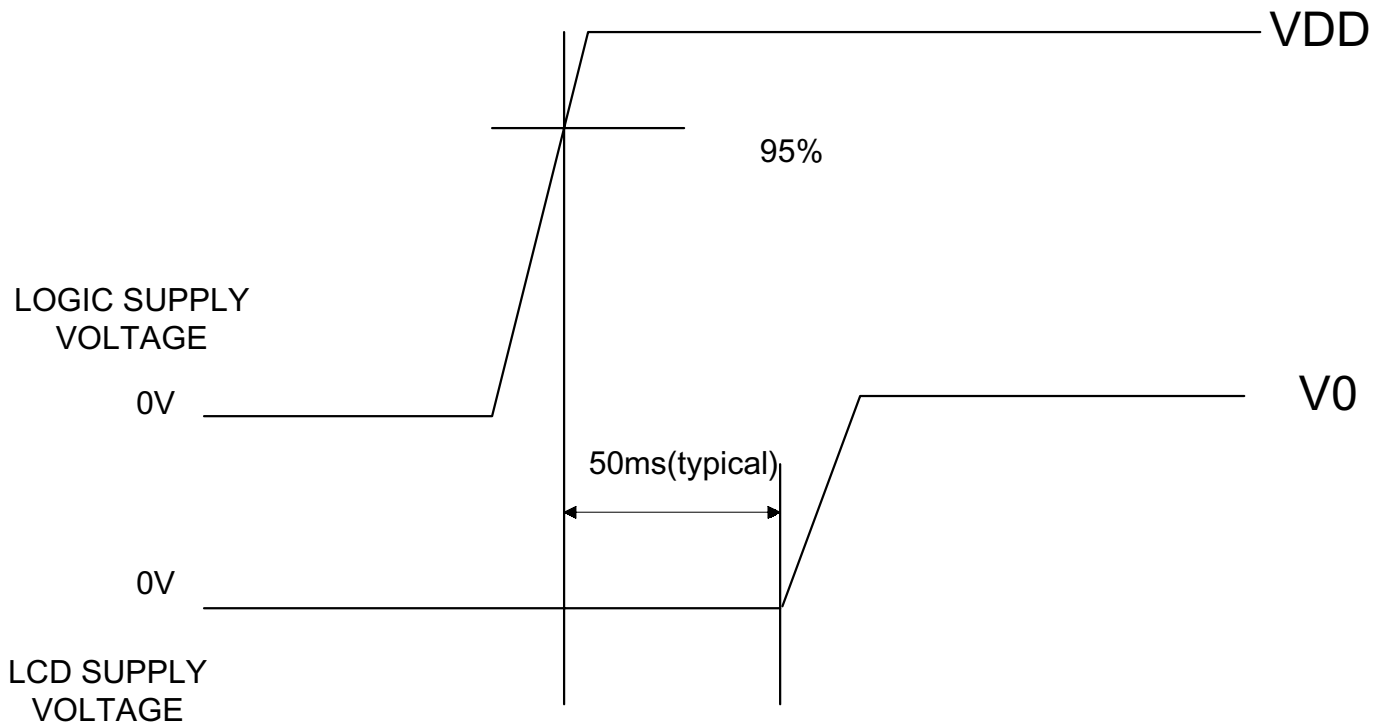


Figure 4: Timing Diagram of VDD Against V0.

6. Character Generator ROM(KS0066U-10B)

Upper 4bit Lower 4bit	LLLL	LLLH	LLHL	LLHH	LHLL	LHLH	LHHL	LHHH	HLLL	HLLH	HLHL	HLHH	HHLL	HHLH	HHHL	HHHH
LLLL	CG RAM (1)															
LLLH	(2)															
LLHL	(3)															
LLHH	(4)															
LHLL	(5)															
LHLH	(6)															
LHHL	(7)															
LHHH	(8)															
HLLL	(1)															
HLLH	(2)															
HLHL	(3)															
HLHH	(4)															
HHLL	(5)															
HHLH	(6)															
HHHL	(7)															
HHHH	(8)															

7. APPENDIX

These specifications shall be applied to the White LED-Lamp (LED or LEDs), NSPWF50BS, which is supplied by Nichia Corporation (Nichia).

1. SPECIFICATIONS

(1) Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Absolute Maximum Rating	Unit
Forward Current	IF	30	mA
Pulse Forward Current	IFP	100	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	120	mW
Operating Temperature	Topr	-30 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Lead Soldering Temperature	Tsol	260±5°C for 5sec. (3.0mm from the base of the epoxy bulb)	

IFP Conditions : Pulse Width ≤ 10msec. and Duty ≤ 1/10

(2) Initial Electrical/Optical Characteristics

(Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	
Forward Voltage	VF	IF=20[mA]	—	3.6	4.0	V	
Reverse Current	IR	VR= 5[V]	—	—	50	μA	
Luminous Intensity	Rank S	Iv	IF=20[mA]	300	360	420	mcd
	Rank R	Iv	IF=20[mA]	210	260	300	mcd
	Rank Q	Iv	IF=20[mA]	150	180	210	mcd

※ One delivery will include three different ranks of products. The quantity-ratio of the three ranks is decided by Nichia.

Measurement Uncertainty of the Luminous Intensity : ±10%

Color Ranks

(IF=20mA, Ta=25°C)

	Rank a			
x	0.250	0.250	0.290	0.290
y	0.205	0.250	0.305	0.260

	Rank b			
x	0.290	0.290	0.330	0.330
y	0.260	0.305	0.365	0.320

	Rank c			
x	0.330	0.330	0.370	0.370
y	0.320	0.365	0.420	0.375


※ One delivery will include the consecutive two ranks of products.


The quantity-ratio of the two ranks is decided by Nichia.

Measurement Uncertainty of the Color Coordinates : ±0.02

2. TYPICAL INITIAL OPTICAL/ELECTRICAL CHARACTERISTICS


Please refer to figures No.STLZ-A906042, No.STLZ-A801473.

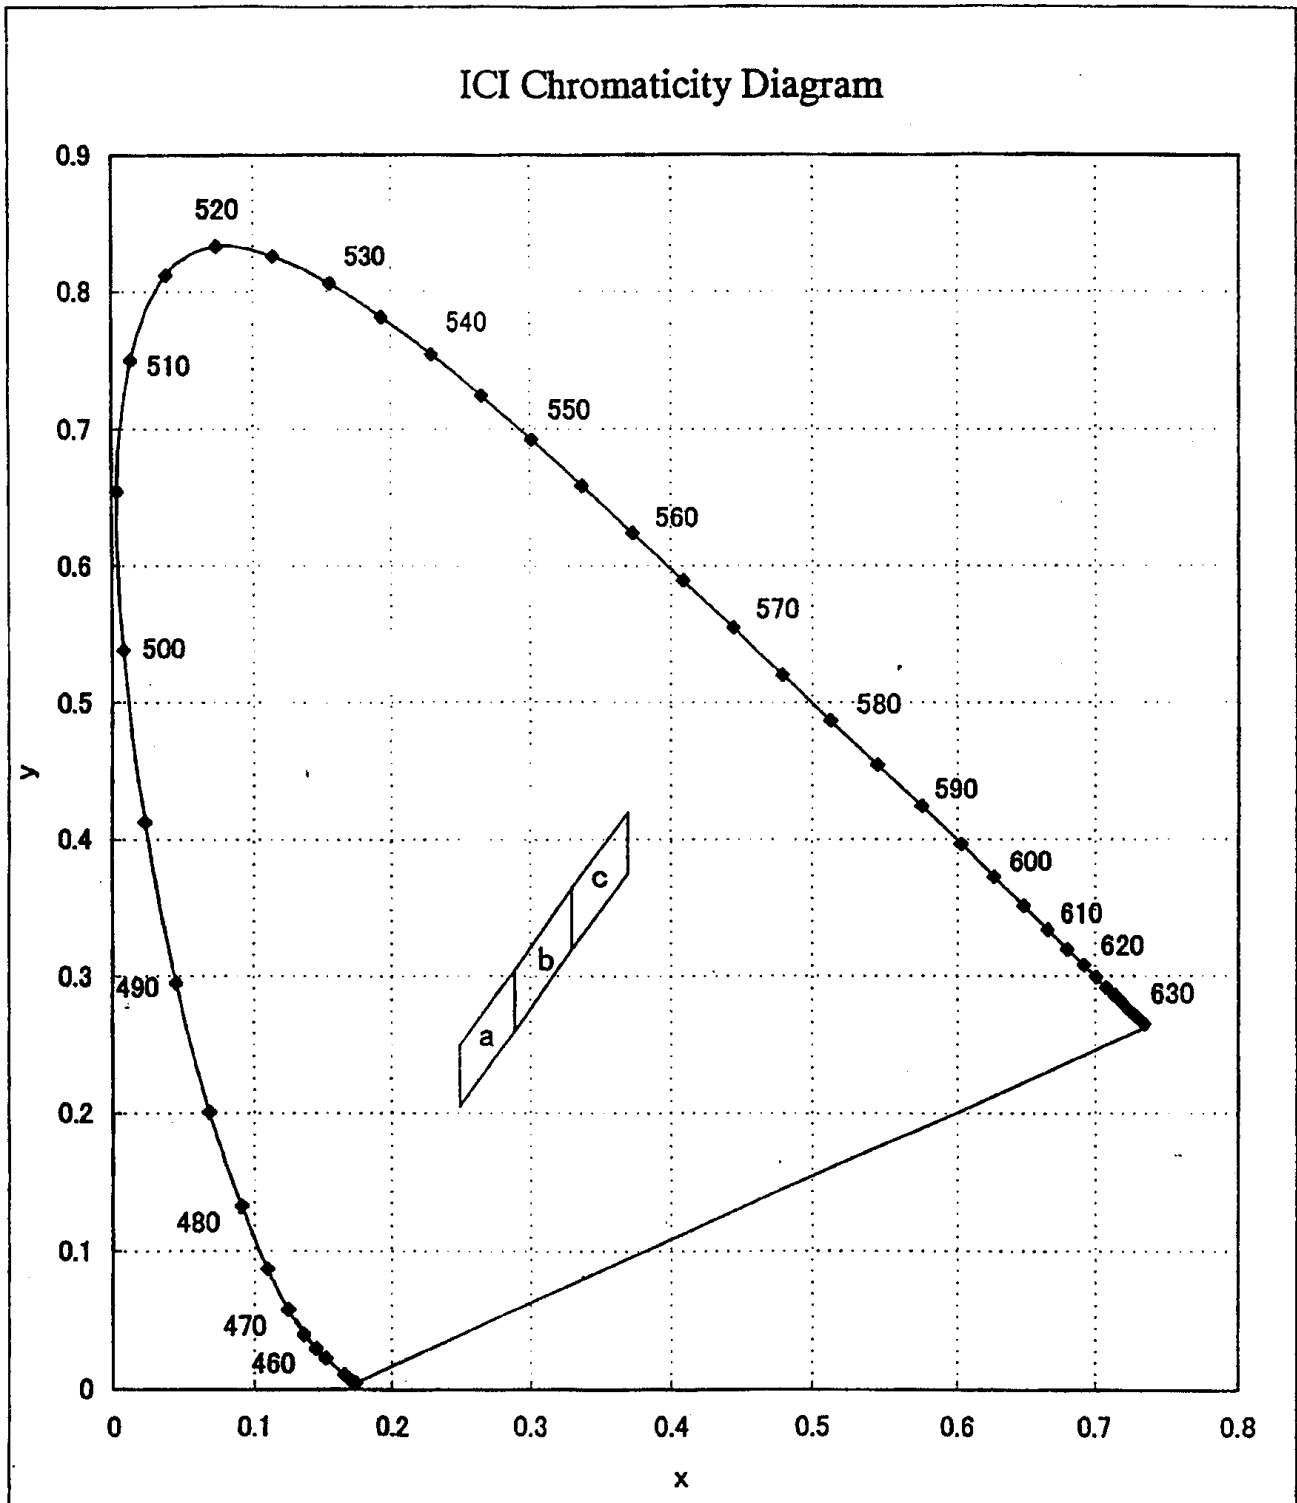

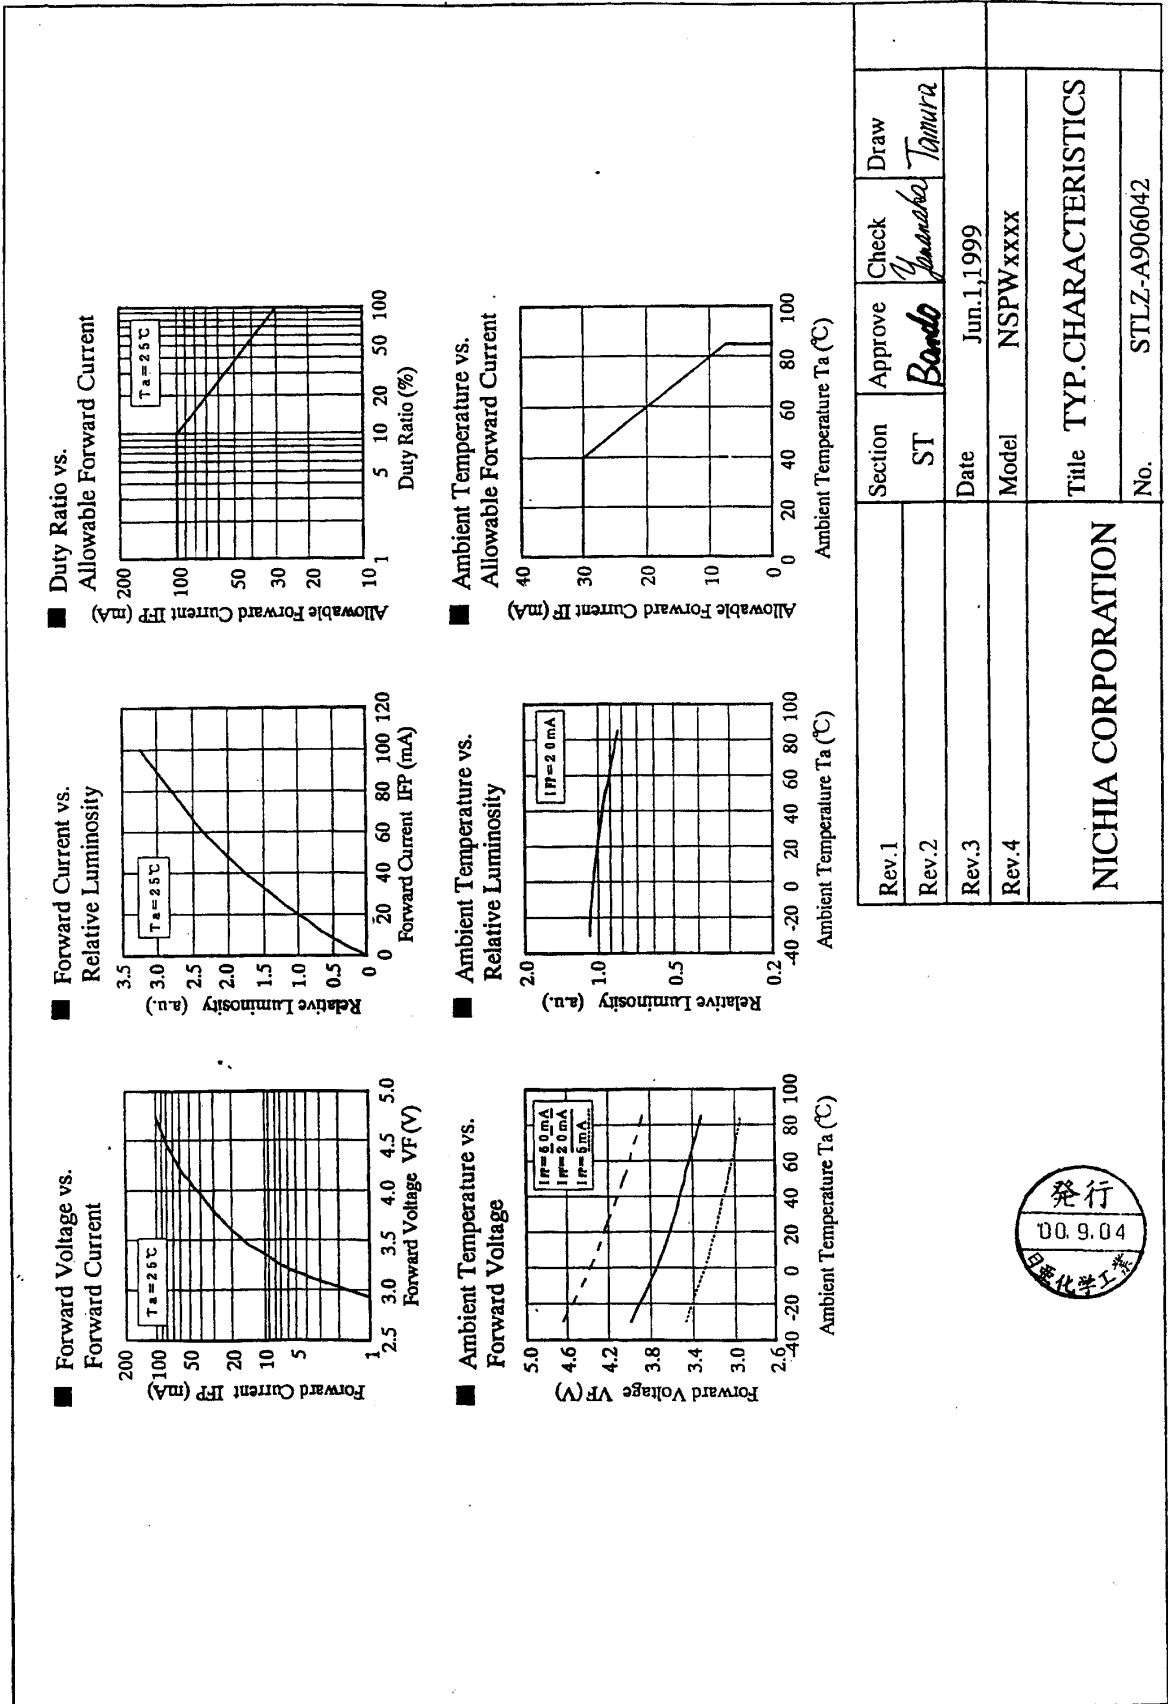

Rev.1	Section	Approve	Check	Draw
Rev.2	ST	Bando	Yanabe	Tamura
Rev.3	Date	Jun.1,1999		
Rev.4	Model	NSPWxxxx		
NICHIA CORPORATION				
Title TYP.CHARACTERISTICS				
				No. STLZ-A906042



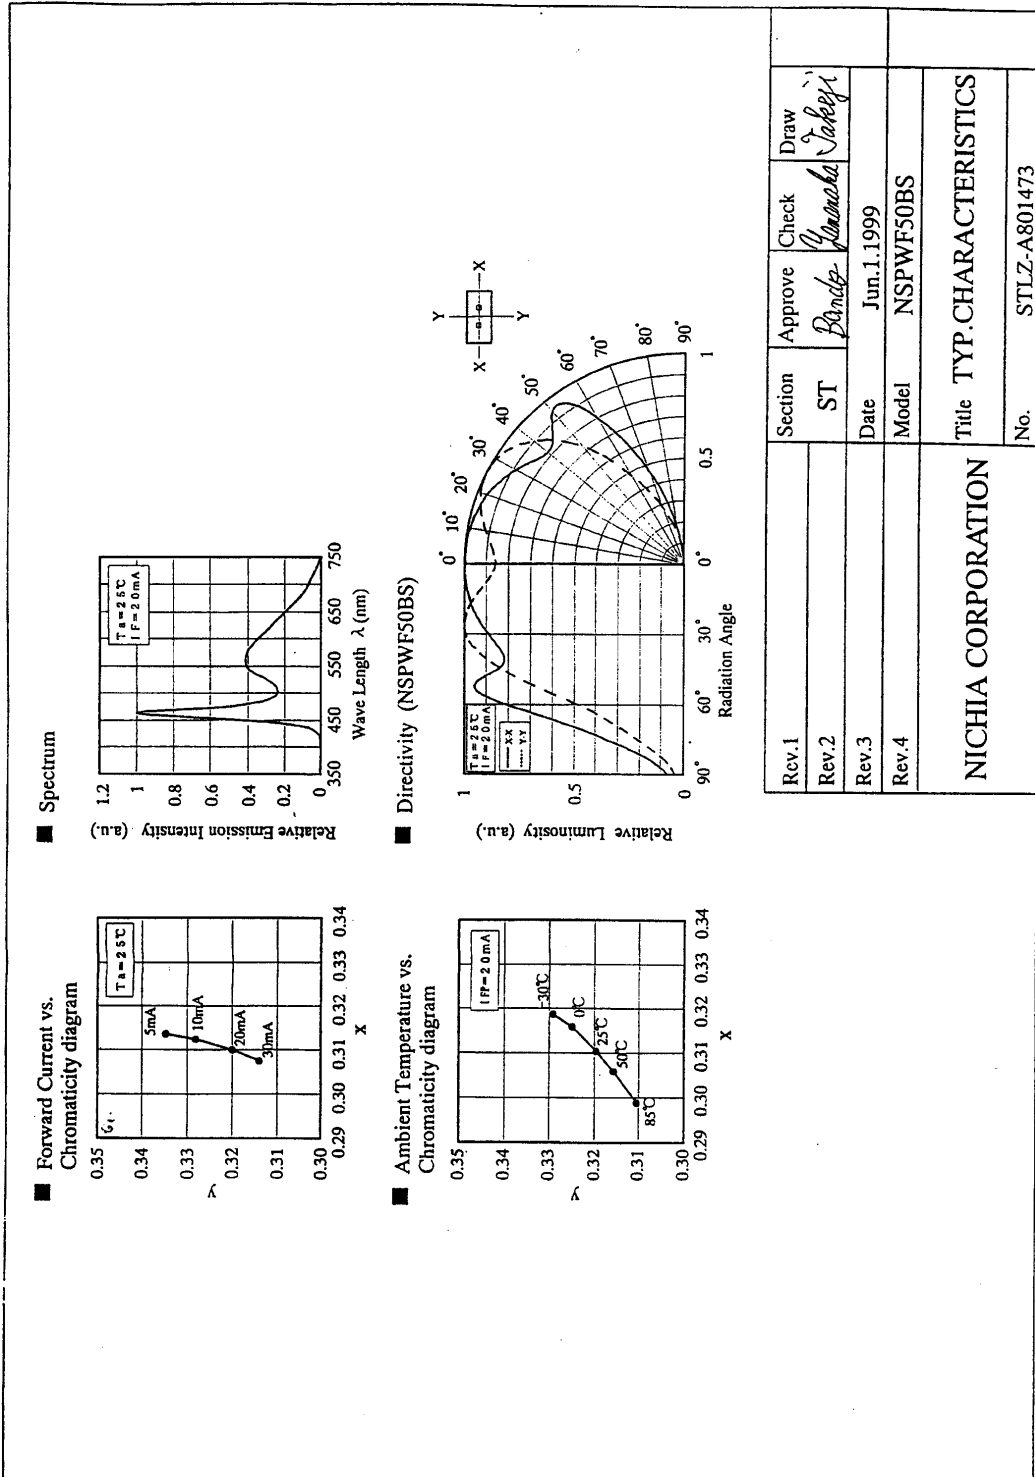

Rev.1	Section	Approve	Check	Draw
Rev.2	ST	<i>Bando</i>	<i>Yonaka</i>	<i>Takagi</i>
Rev.3	Date	Jun.1.1999		
Rev.4	Model	NSPWF50BS		
NICHIA CORPORATION				
Title TYP.CHARACTERISTICS				
				No. STLZ-A801473