BNC Jack Bulkhead, 75R

multicomp PRO



Specifications:


Connector Type	: BNC Coaxial	
Body Style	: Straight Bulkhead Jack	
Impedance	: 75Ω	
Contact Material	: Brass	
Contact Plating	: Gold	
Frequency Max.	: 11GHz	
Connector Mounting	: Panel	
Body Plating	: Nickel	
Contact Resistance	: 1.5mΩ	
DC Current Max.	: 1A	
Material	: Brass with Silicone Gaskets	
Mounting Type	: Bulkhead	
Operating Temperature	: -65°C to +165°C	
Panel Cutout Diameter	: 9.7mm	
Panel Thickness	: 4mm	
Proof Voltage	: 2kV	
VSWR	: 1.35	
Working Voltage	: 500V	
Bodies	: Brass per JIS-C3604	
Centre Contact	: Brass per JIS-C3604	
Insulation	: PTFE per ASTM D1457 and ASTM D1710	
Part to be clean and free of burrs		

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

multicomp PRO

BNC Jack Bulkhead, 75R

multicomp PRO

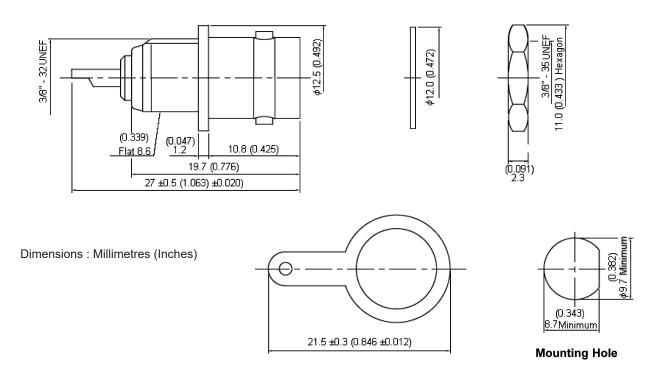

Number	Description	Material	Finish
1	Washer		
2	Nut	Brass	Nickel 100µ" Minimum
3	Grounding Tab		
4	Insulation	PTFE	None
5	Centre Contact	Brass	Gold
6	Body		Nickel 100µ" Minimum
7	Insulation	PTFE	None

Part Number Table

Description	Part Number
Jack BNC, Bulkhead, 75R, Nickel	MP-13-25 TGN 75R

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

