


Chip Inductors – 0402CS (1005)




Continuing in our long tradition of innovation and leadership, Coilcraft introduced the industry's first 0402 wirewound inductor.

This series shares all of the characteristics of Coilcraft's other ceramic inductors: exceptionally high Q factors, especially at use frequencies; outstanding self-resonant frequency; tight inductance tolerance; and excellent batch-to-batch consistency.

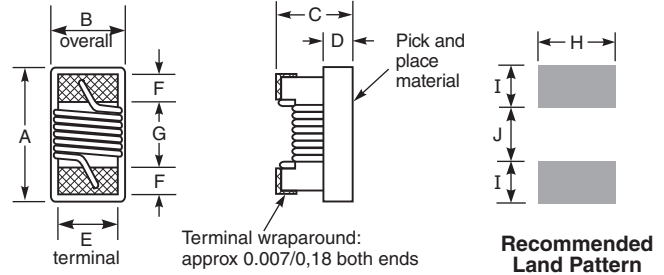


A	B	C	D	E	F	G	H	I	J
max	max	max	ref						
0.047	0.025	0.026	0.010	0.020	0.009	0.022	0.026	0.014	0.018
1,19	0,64	0,66	0,25	0,51	0,23	0,56	0,66	0,36	0,46

Typical L vs Frequency

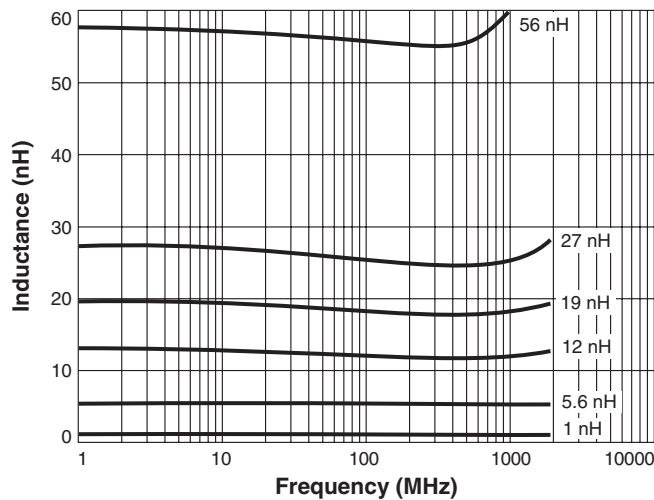

Typical Q vs Frequency

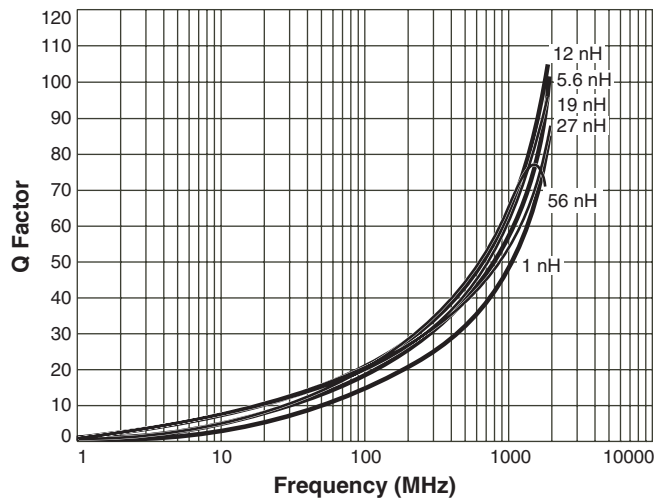

- Core material** Ceramic
- Environmental** RoHS compliant, halogen free
- Terminations** Silver-palladium-platinum-glass frit. Other terminations available at additional cost.
- Weight** 0.8 – 1.0 mg
- Ambient temperature** -40°C to +125°C with Irms current.
- Maximum part temperature** +140°C (ambient + temp rise).
- Storage temperature** Component: -40°C to +140°C. Tape and reel packaging: -40°C to +80°C
- Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles
- Temperature Coefficient of Inductance (TCL)** +25 to +125 ppm/°C
- Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)
- Failures in Time (FIT) / Mean Time Between Failures (MTBF)** One per billion hours / one billion hours, calculated per Telcordia SR-332
- Packaging** 2000 or 5000 per 7" reel Paper tape: 8 mm wide, 0.68 mm thick, 2 mm pocket spacing
- PCB washing** Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

S-Parameter files
ON OUR WEB SITE

SPICE models
ON OUR WEB SITE



US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 198-1 Revised 03/12/20
 © Coilcraft Inc. 2020
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.

0402CS Series (1005)

Designer's Kit C328 contains 20 each of all 5% values
 Designer's Kit C328-2 contains 20 each of all 2% values

Part number ¹	Inductance ² (nH)	Percent tolerance ³	900 MHz		1.7 GHz		SRF min ⁵ (GHz)	DCR max ⁶ (Ohms)	Irms ⁷ (mA)
			L typ	Q typ ⁴	L typ	Q typ ⁴			
0402CS-1N0XJE	1.0	5	1.02	77	1.02	69	12.70	0.045	1360
0402CS-1N2XJE	1.2	5	1.17	28	1.17	38	12.90	0.090	740
0402CS-1N8X_E	1.8	5,3,2	1.78	54	1.78	75	12.00	0.070	1040
0402CS-1N9X_E	1.9	5,3,2	1.72	68	1.74	82	11.30	0.070	1040
0402CS-2N0X_E	2.0	5,3,2	1.93	54	1.93	75	11.10	0.070	1040
0402CS-2N2X_E	2.2	5,3,2	2.19	59	2.23	100	10.80	0.070	960
0402CS-2N4X_E	2.4	5,3,2	2.24	51	2.27	68	10.50	0.068	790
0402CS-2N7X_E	2.7	5,3,2	2.58	42	2.60	61	10.40	0.120	640
0402CS-3N3X_E	3.3	5,3,2	3.10	65	3.12	87	7.00	0.066	840
0402CS-3N6X_E	3.6	5,3,2	3.56	45	3.62	71	6.80	0.066	840
0402CS-3N9X_E	3.9	5,3,2	3.89	50	4.00	75	6.00	0.066	840
0402CS-4N3X_E	4.3	5,3,2	4.19	47	4.30	71	6.00	0.091	700
0402CS-4N7X_E	4.7	5,3,2	4.55	48	4.68	68	4.77	0.130	640
0402CS-5N1X_E	5.1	5,3,2	5.15	56	5.25	82	4.80	0.083	800
0402CS-5N6X_E	5.6	5,3,2	5.16	54	5.28	81	4.80	0.083	760
0402CS-6N2X_E	6.2	5,3,2	6.16	52	6.37	76	4.80	0.083	760
0402CS-6N8X_E	6.8	5,3,2	6.56	63	6.93	78	4.80	0.083	680
0402CS-7N5X_E	7.5	5,3,2	7.91	60	8.22	88	4.80	0.10	680
0402CS-8N2X_E	8.2	5,3,2	8.50	57	8.85	84	4.40	0.10	680
0402CS-8N7X_E	8.7	5,3,2	8.78	54	9.21	73	4.10	0.20	480
0402CS-9N0X_E	9.0	5,3,2	9.07	62	9.53	78	4.16	0.10	680
0402CS-9N5X_E	9.5	5,3,2	9.42	54	9.98	69	4.00	0.20	480
0402CS-10NX_E	10	5,3,2	9.8	50	10.10	67	3.90	0.20	480
0402CS-11NX_E	11	5,3,2	10.7	52	11.20	78	3.68	0.12	640
0402CS-12NX_E	12	5,3,2	11.9	53	12.70	71	3.60	0.12	640
0402CS-13NX_E	13	5,3,2	13.4	51	14.63	57	3.45	0.21	440
0402CS-15NX_E	15	5,3,2	14.6	55	15.50	77	3.28	0.17	560
0402CS-16NX_E	16	5,3,2	16.6	46	18.86	47	3.10	0.22	560
0402CS-18NX_E	18	5,3,2	18.3	57	20.28	62	3.10	0.23	420
0402CS-19NX_E	19	5,3,2	19.1	50	21.10	67	3.04	0.20	480
0402CS-20NX_E	20	5,3,2	20.7	52	23.66	53	3.00	0.25	420
0402CS-22NX_E	22	5,3,2	23.2	53	26.75	53	2.80	0.30	400
0402CS-23NX_E	23	5,3,2	23.8	49	26.90	64	2.72	0.30	400
0402CS-24NX_E	24	5,3,2	25.1	51	29.50	50	2.70	0.30	400
0402CS-27NX_E	27	5,3,2	28.7	49	33.50	63	2.48	0.30	400
0402CS-30NX_E	30	5,3,2	31.1	46	38.50	39	2.35	0.30	400
0402CS-33NX_E	33	5,3,2	34.9	31	41.74	32	2.35	0.30	400
0402CS-36NX_E	36	5,3,2	39.5	44	48.40	53	2.32	0.44	320
0402CS-39NX_E	39	5,3,2	41.7	47	50.23	45	2.10	0.55	200
0402CS-40NX_E	40	5,3,2	39.0	44	47.40	33	2.24	0.44	320
0402CS-43NX_E	43	5,3,2	45.8	46	61.55	34	2.03	0.81	100
0402CS-47NX_E	47	5,3,2	50.0	38	—	—	2.10	0.83	150
0402CS-51NX_E	51	5,3,2	56.6	40	—	—	1.75	0.82	100
0402CS-56NX_E	56	5,3,2	62.8	42	—	—	1.76	0.97	100
0402CS-68NX_E	68	5,3,2	78.2	36	—	—	1.62	1.12	100
0402CS-82NX_E	82	5,3,2	—	—	—	—	1.26	1.55	50
0402CS-R10X_E	100	5,3,2	—	—	—	—	1.16	2.00	30
0402CS-R12X_E	120	5,3,2	—	—	—	—	1.10	2.20	50

1. When ordering, specify **tolerance, termination and packaging** codes:

0402CS-68NXJEW

- Tolerance:** G = 2% H = 3% J = 5%
 (Table shows stock tolerances in bold.)
- Termination:** E = Halogen free component. RoHS compliant silver-palladium-platinum-glass frit terminations.
 L = RoHS compliant, not halogen-free. Silver-palladium-platinum-glass frit terminations.
 R = RoHS compliant matte tin over nickel over silver-platinum-glass frit.
 Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).
- Packaging:** W = 7" machine-ready reel. EIA-481 punched paper tape (2000 parts per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).
 Q = 7" machine-ready reel. EIA-481 punched paper tape (5000 parts per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).
 U = Less than full reel. In an effort to simplify our part numbering system, Coilcraft is eliminating the need for multiple packaging codes. When ordering, simply change the last letter of your part number from U to W.

2. Inductance measured at 250 MHz using a Coilcraft SMD-F test fixture and Coilcraft-provided correlation pieces with an Agilent/HP 4286 impedance analyzer.
3. Tolerances in bold are stocked for immediate shipment.
4. Q measured using an Agilent/HP 4291A with an Agilent/HP 16193 test fixture.
5. For SRF >6 GHz, measured using an Agilent/HP 8722ES network analyzer and a Coilcraft SMD-D test fixture. For SRF ≤6 GHz, measured using an Agilent/HP 8753D network analyzer and a Coilcraft SMD-D test fixture.
6. DCR measured on a micro-ohmmeter.
7. Current that causes a 15°C temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
8. Electrical specifications at 25°C.
 Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
 UK +44-1236-730595 sales@coilcraft-europe.com
 Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
 China +86-21-6218 8074 sales@coilcraft.com.cn
 Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 198-2 Revised 03/12/20

© Coilcraft Inc. 2020

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.