

Technical data sheet · Cablefix Sensor/Actuator flange (S/A)

Cable fittings and accessories



Identification	Type	1×S/A
	Part-No.	600321
Use/Area of application		
Properties	<ul style="list-style-type: none">• The strain relief closes automatically for pushing through of the cable• An integrated formed rubber part seals off the cable• For troubleshooting, maintenance or retrofitting, the individual cables can be easily loosened and replaced• Unneeded inputs can be closed off through the plugs supplied with the product	
Technical data		
Halogen-free	Yes	
Burning behaviour	the PA plate according to UL 94 V2	
Temperature range	-30 °C to +70 °C	
Silicon-free	Yes	
Strain relief	Yes	
max. metal gauge	3	
Breakthrough with standard sheet metal hole punch	46 × 46mm	
Protection class	IP 55	
Width	50.0 mm	
Height	50.0 mm	
Depth	10.0 mm	

10.05.2007 – Subject to technical modification

Part-No. 600321

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1-704-504-02 22 • Fax +1-704-504-02 23

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 4, Brabazon Court • Borman

Lichfield Road Industrial Estate • GB-Tamworth, Staffordshire B79 7TA

Tel. +44-18 27-3 13 33-0 • Fax +44-18 27-3 13 33-2

www.lutze.com • sales.gb@lutze.co.uk

Technical data sheet · Cablefix Sensor/Actuator flange (S/A)

Dimensions (W×H×D) 50.0×50.0×10.0
Maße (L×H×T) 50×10


Design

Seal NBR60 (oil resistant)

General data

VE 5 piece

Scale drawing

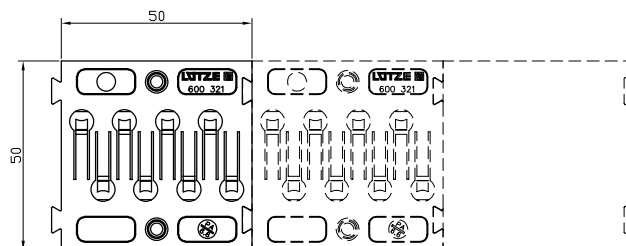

10.05.2007 – Subject to technical modification

Part-No. 600321

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1-704-504-02 22 • Fax +1-704-504-02 23

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 4, Brabazon Court • Borman

Lichfield Road Industrial Estate • GB-Tamworth, Staffordshire B79 7TA

Tel. +44-18 27-3 13 33-0 • Fax +44-18 27-3 13 33-2

www.lutze.com • sales.gb@lutze.co.uk



Systematic Technology