


## PF-XTI-AL (PIO)630VDC Audio Capacitors Paper in Oil, Tin Foil

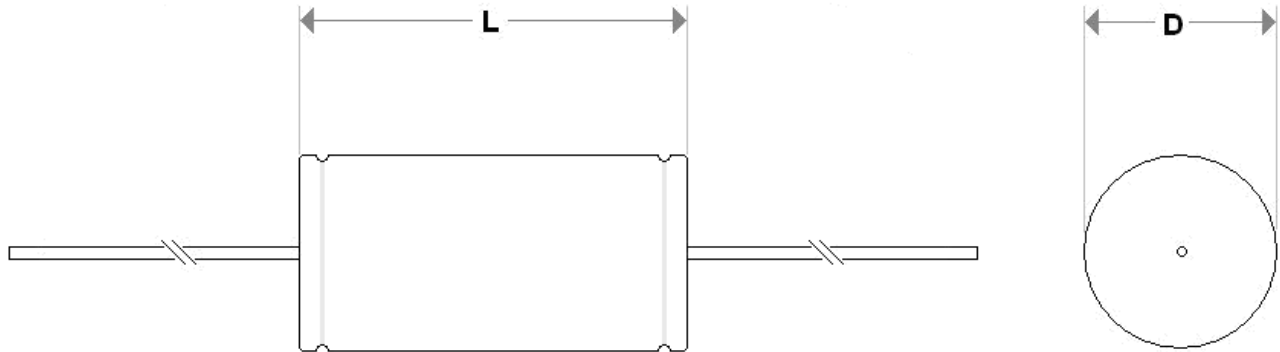

CAPACITANCE $\mu\text{F}$	D	L
0.001 – 0.05	15mm	34mm
0.05+ – 0.47	25mm	54mm
0.47+ - 1.2	35mm	54mm
1.2+ -2.0	45mm	95mm

AMPOHM Audio Capacitors are specially designed for high performance audio systems, used in various applications. These paper in oil (PIO) capacitors are hand wound using high purity tin foil and have their 1.0mm diameter (0.8mm diameter 0.0033 $\mu\text{F}$  and below) tinned copper leads hand solder sealed to the eyelets in the end discs. They are oil impregnated before being assembled oil filled and hermetically sealed in an aluminium housing with phenolic resin and rubber end discs, all being individually hand tested.

### Custom Designs available

**Type:** PF-XTI-AL  
**Capacitance:** 0.001 $\mu\text{F}$  – 2.0 $\mu\text{F}$   
**Dissipation Factor:** < 0.01@ 1KHz  
**Tolerance:** +/- 20% up to 0.1 $\mu\text{F}$   
                   +/- 10% up to 2.0 $\mu\text{F}$   
                   +/- 5% above 5.0 $\mu\text{F}$   
**Rated Voltage:** 630V DC  
**Temperature Range:** -40 to +85C  
**Outer Foil:** Line on label denotes outer foil

**Marking:**

AMPOHM
AUDIO CAPACITOR
TYPE
SPEC
VALUE - VOLTAGE
DATE CODE

Line on label denotes outer foil

**Witness Innovation... Experience Technology**



Registered Office: Ampohm Wound Products Ltd, Knaresborough Technology Park, Manse Lane, Knaresborough, North Yorkshire, HG5 8LF  
 Tel: 01423 865641 • Fax: 01423 798246 • E-mail: [sales@ampohm.co.uk](mailto:sales@ampohm.co.uk) • Website: [www.ampohm.co.uk](http://www.ampohm.co.uk)