EL8105-000 - ACTIVE

D-CT

TE Internal #: EL8105-000 D-CT, Printable Tubing, Continuous Printable Tubing Type, Fluid Resistant Printable Tubing Grade, 3:1 Printable Tubing Shrink Ratio, Yellow

View on TE.com >



Identification & Labeling > Printable Tubing > CONTINUOUS TUBE FLUID RESISTANT D-CT



Printable Tubing Type: Continuous
Printable Tubing Grade: Fluid Resistant
Printable Tubing Shrink Ratio: 3:1
Primary Product Color: Yellow
Supplied Inner Diameter: 19 mm [.75 in]

All CONTINUOUS TUBE FLUID RESISTANT D-CT (16)

Features

Product Type Features

Printable Tubing Type

Continuous

Printable Tubing Grade	Fluid Resistant
Body Features	
Printable Tubing Shrink Ratio	3:1
Primary Product Color	Yellow
Dimensions	
Supplied Inner Diameter	19 mm[.75 in]
Recovered Inside Diameter	6.4 mm[.25 in]
Compatible Cable Diameter Range	6.4 – 15.2 mm[.25 – .598 in]
Usage Conditions	
Operating Temperature Range	-75 – 135 °C[-103 – 275 °F]
Operation/Application	
Recommended Ribbon	See TE Document 411-121005 the Printer Product Ribbon Matrix
Printer/Label Features	
Recommended Printer	See TE Document 411-121005 the Printer

C For support call+1 800 522 6752

EL8105-000

D-CT, Printable Tubing, Continuous Printable Tubing Type, Fluid Resistant Printable Tubing Grade, 3:1 Printable Tubing Shrink Ratio, Yellow



	Product Ribbon Matrix
Printer Technology	Thermal Transfer
Packaging Features	
Packaging Quantity	50
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




EL8105-000

D-CT, Printable Tubing, Continuous Printable Tubing Type, Fluid Resistant Printable Tubing Grade, 3:1 Printable Tubing Shrink Ratio, Yellow






Also in the Series | D-CT

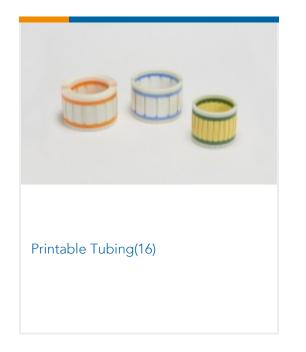

Customers Also Bought

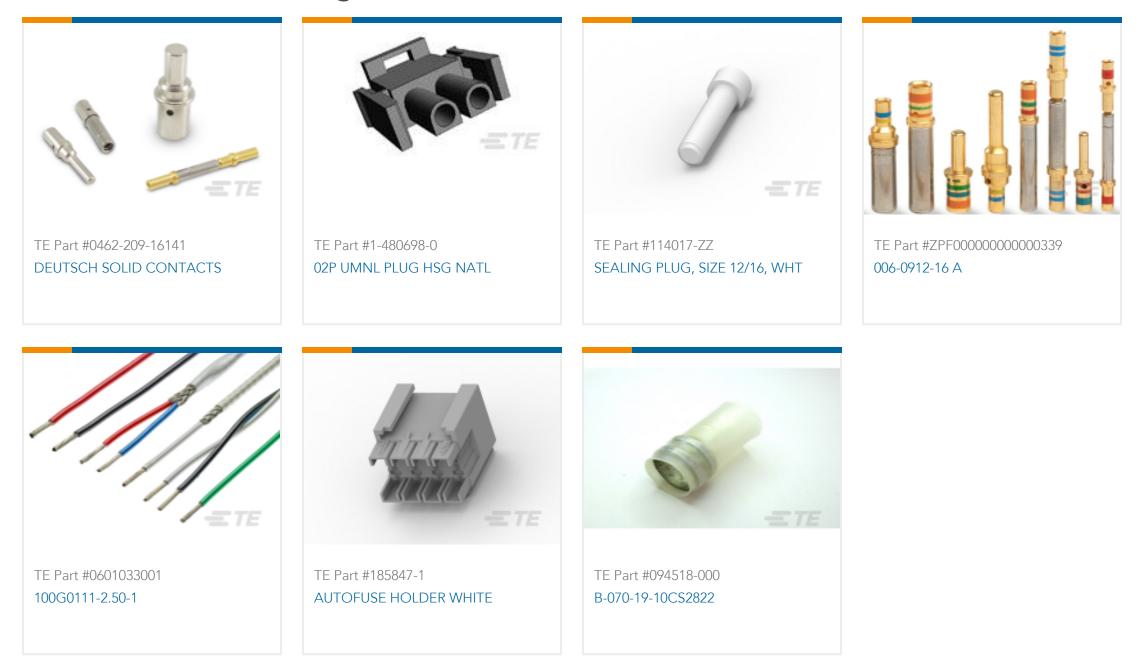

Documents

Product Drawings

D-CT-50M-18-OUT-4

English

D-CT-50M-18-OUT-4

English

Datasheets & Catalog Pages

EL8105-000

D-CT, Printable Tubing, Continuous Printable Tubing Type, Fluid Resistant Printable Tubing Grade, 3:1 Printable Tubing Shrink Ratio, Yellow



D-CT, Continuous Diesel Resistant Heat Shrinkable Identification Tube

English

Product Specifications

Product Specification

English

Instruction Sheets

Instruction Sheet (non U.S.)

English