




Made in the United States of America



The Front Sole Grounder FSG1M provides improved floor contact by covering the ball of the foot with conductive rubber. Two D-Ring straps with hook and loop, and a back clasp provide a comfortable and secure fit.

Properties	Typical Value	Test Method
Hook and Loop	3/4"	
Elastic Strap	3/4" Black with clasp	
D-Ring	2	
Resistor	1 Megohm	
Sole Exterior	<10 ⁵ ohms	
Total Grounder	9 x 10 ⁵ ohms	ANSI/ESD S20.20, EIA 625 ESD-SP9.2

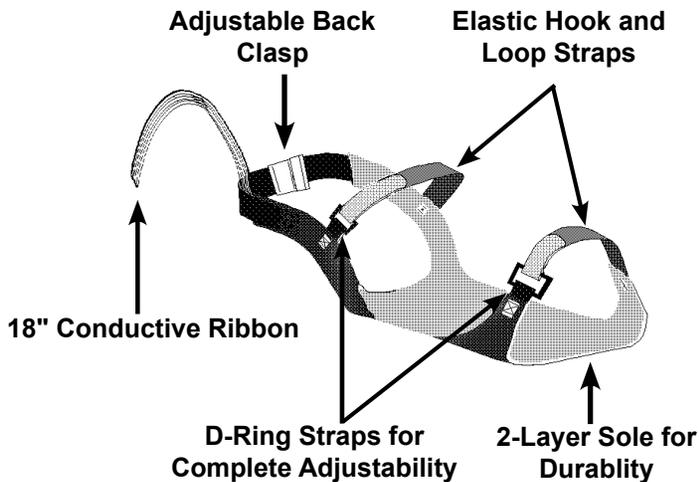

Item	Size
FSG1M-S	Small
FSG1M-M	Medium
FSG1M-L	Large

Note: This product is not recommended for use on equipment with operating voltage exceeding 250 VAC.

CAUTION: The ESD Series is for electrostatic control. It will not reduce or increase your risk of receiving electric shock when using or working on electrical equipment. Follow the same precautions you would use without wrist straps, including:

- Make certain that equipment having a grounding type plug is properly grounded.
- Make certain that you are not in contact with grounded objects other than through the ESD Series.

Unless otherwise noted, tolerance ± 10%

Specifications and procedures subject to change without notice.

FSG1M - FRONT SOLE GROUNDER, 1 MEG RESISTOR



926 JR Industrial Drive, Sanford, NC 27332
WEB SITE: StaticControl.com
PHONE (919) 718-0000

DRAWING NUMBER
FSG1M

DATE
August 2015