

RoHS

Compliant




Specifications

Contact Resistance Insulation Resistance : 2Ω

: DC 300V/10ms, 10M Ω Min.

Diagram

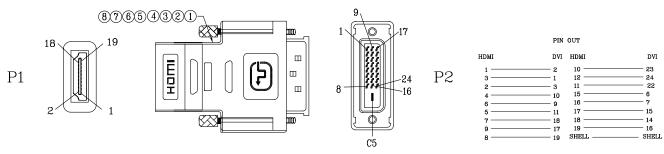

No	Description	Qty.	Unit
1	HDMI Female to DVI Male PCB	1	Pcs
2	HDMI AF black insulation; shell plated nickel; Pin Plated gold		
3	Transparent PE	10	
4	PVC~45P~Black	30	g
5	DVI(24+1)M black insulation; shell plated nickel; Pin plated gold	1	Pcs
6	HDMI AF Transparent dust cover		
7	Screw:#4-40UNC 2.8×33.7mm		
8	DVI Transparent dust cover		

Part Number Table

	Description	Part Number
Dimensions : Millimetres	19-pin HDMI Jack to DVI-D Plug Adapter	PSG02581

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-SIGNAL is the registered trademark of Premier Farnell Limited 2019.

Newark.com/exclusive-brands Farnell.com/exclusive-brands Element14.com/exclusive-brands

