



AUDIO
TECHNOLOGIES®

XLR CHASSIS CONNECTORS

4 PIN B SERIES - VERTICAL PCB MOUNT

Locking vertical PCB Mount 4 pin chassis connector with plastic body and metal faceplate perfect for use in DC power, aviation, communications, and other AV applications.

Other Available Mounting Option: Horizontal PCB Mount

SPECIFICATIONS

PRODUCT

Gender: **Male (IO-XLR4-M-BV)**

Female (IO-XLR4-F-BV)

Contacts: **4**

ELECTRICAL

Capacitance Between Contacts: **≤ 3.2 pF**

Capacitance Between Contact and Ground: **≤ 3.1 pF**

Contact Resistance: **< 6 mΩ**

Insulation Resistance: **≥ 5000 MΩ**

Dielectric Strength: **1500V @ 60s**

Current Rating: **4.5 A / 50 V AC**

Grounding: **Separate ground pin. Grounds to shell of mating connector and panel**

ENVIRONMENTAL

Standard Compliance: **IEC 61076-2-103**

UL Flammability Rating: **UL94 V-0**

Temperature Range: **-40°C ~ +70° C (-40°F ~ +158°F)**



IO-XLR4-M-BV

IO-XLR4-F-BV

MECHANICAL

Lifetime: **> 1000 Mating Cycles**

Wiring: **Vertical PCB Mount**

Locking Device: **Latch Lock**

Mounting Direction: **Rear**

Solderability: **Complies with IEC 60068-2-20**

MATERIAL

Contacts: **Brass**

Contact Plating: **.05μm Gold**

Ground Terminal: **Brass**

Ground Terminal Finish: **Nickel**

Shell: **PA**

Shell Finish: **Black**

Push Button: **Stainless Steel**

Push Button Finish: **Nickel**

Latch: **Stainless Steel**

Latch Finish: **Nickel**

Faceplate Finish: **Nickel**


Product specifications may change without prior notification

Io Audio Technologies® is a registered trademark of Knight Electronics, Inc.
10557 Metric Dr. Dallas, TX 75243 | 214-340-0265 | 800-323-2439 | Fax: 214-340-5870 |
www.ioaudiotechnologies.com




DRAWINGS

IO-XLR4-F-BV

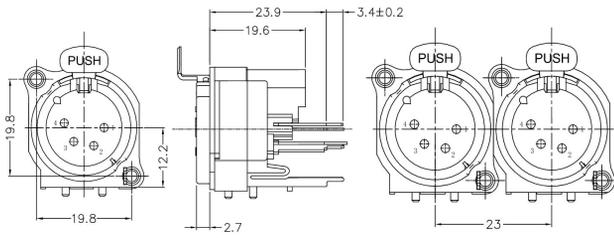


IO-XLR4-M-BV

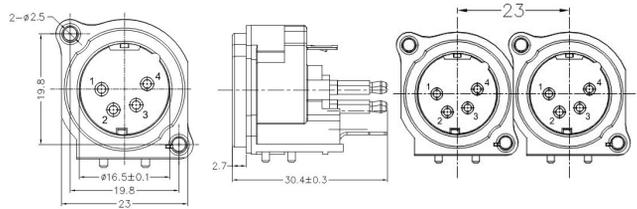

FEATURES & APPLICATIONS

B Series XLR chassis connectors offer the most cost-effective solution for design-in applications where the termination method is to a printed circuit board. The small footprint makes this our XLR receptacle with the highest packing density available. These connectors feature a compact, all plastic housing with a nickel plated faceplate. Precision machined, one piece, gold plated contacts are standard to help prolong the useful life of the connectors. They also come with a separate nickel plated ground pin that grounds the connector to the panel. The compact form factor of these connectors makes them perfect for situations where space saving is a priority or space for a connector is limited.

Panel Cutout



Available in 3, 4 or 5 pin, Male or Female variations with options for vertical or horizontal PCB mounting.

PART NUMBER BREAKDOWN:

- IO-XLR4-M-BV
Series Identifier
- IO-XLR4-M-BV
Number of Pins
- IO-XLR4-M-BV
Gender
- IO-XLR4-M-BV
Series Identifier
- IO-XLR4-M-BV
H = Horizontal PCB Mount
V = Vertical PCB Mount

STANDARDS & CLASSIFICATIONS



Product specifications may change without prior notification