Premium High Speed 4K UHD HDMI Lead with Ethernet

pro-SIGNAL

Specifications

Connector Type A	: HDMI A Plug
Connector Type B	: HDMI A Plug
Contact Resistance	: 3Ω Max.
Insulation Resistance	: 5MΩ Min.
Hi-Pot Test	: DC 300V/10ms
Jacket Colour	: Black

Diagram
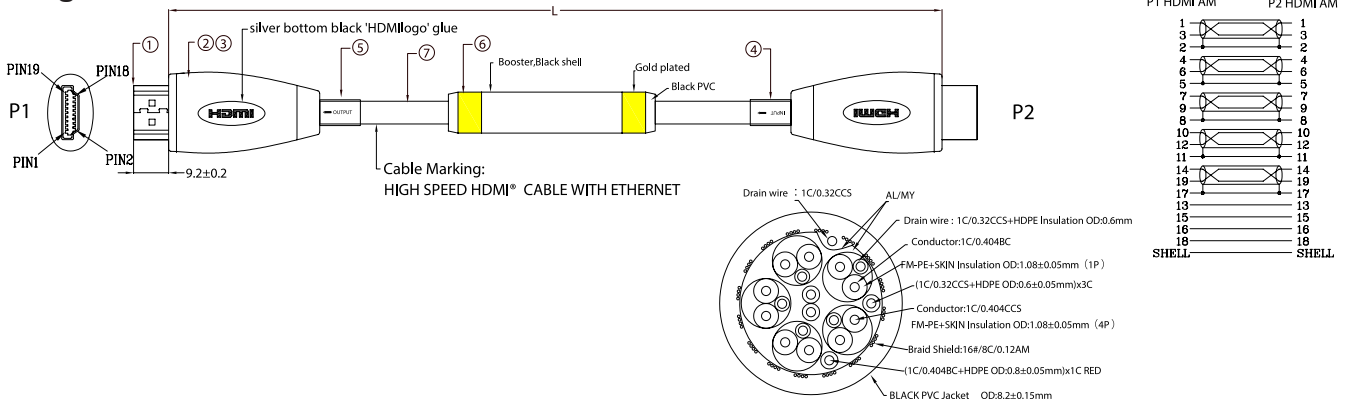
No.	Part Name	Description	Unit
1	Plug	HDMI AM 19P Pin:G/F, Shell : Gold plated	2 pcs
2	Model	PE, Nature Colour	g
3		Black lacquered metal housing	
4	Label	Heat shrinkable tube,"INPUT"	1 pc
5		Heat shrinkable tube,"OUTPUT"	
6	IC	Amplifier	
7	Cable	HDMI 26-28AWG 1PBC+SG CCS 19+1 [(1/0.404BC*1P+D1/0.32CCS+AL/MY)*1P+(1/0.404CCS*1P+D1/0.32CCS+AL/MY)*4P+1/0.32 CCS*3C+1/0.404BC*1C]+AL+D1/0.32CCS+B128/0.12AM Black PVC OD:8.2±0.15mm	-

Part Number Table

Description	Length "L" (mm)	Part Number
Premium High Speed 4K UHD HDMI Lead with Ethernet, Male to Male, Gold Contacts, Black	15000 ±100	PSG3021-HDMI-15
	20000 ±100	PSG3022-HDMI-20

Dimensions : Millimetres

Newark.com/exclusive-brands
Farnell.com/exclusive-brands
Element14.com/exclusive-brands

pro-SIGNAL