



DENSI-PAK® 9 VOLT BATTERY HOLDER

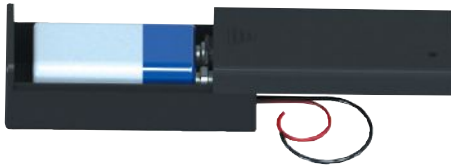

- Positions anywhere for easy access to battery
- Battery held securely in place
- Snap-on cover protects and secures battery against shorting
- Economical design
- Battery contacts provide reliable low resistance connection

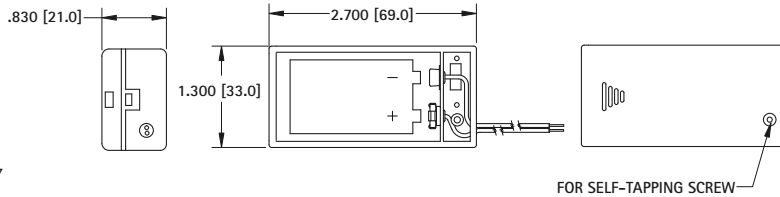

Materials:

Body: ABS plastic

Contacts: Brass, Nickel Plate



Wire Leads: 6.0 (152), #26 AWG, Tinned and stripped, UL/CSA 1007

CAT. NO. 245

DUAL 9 VOLT BATTERY STRAP

This dual battery strap is pre-wired for connecting two 9 Volt batteries. Base made from fibre material with steel, nickel plated contacts. Wires have tinned copper conductors, PVC insulation and the ends are stripped for easy connection. Wires meet UL/CSA #1061 requirements.

PARALLEL

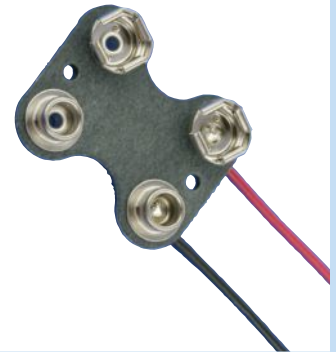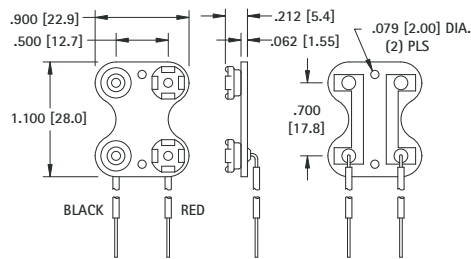

SPECIFICATIONS

Contacts: Steel, Nickel Plate


Wire: 7.0 (177.8)#22 AWG, UL/CSA #1061

End Strip: .375 (9.5) Long, Tinned

CAT. NO. 227

VERTICAL 9 VOLT PC SNAP-ON CONTACT

- Space saving, economical
- Excellent mechanical strength
- Low contact resistance
- Durable fibre base
- Wave solderable
- Anti-Wicking Design



SPECIFICATIONS


Base: .062 (1.57) Fibre

Contacts: Steel, Nickel Plate

Pins: Brass, Tin Plate



CAT. NO.	L LENGTH
967 (with PC Pins)	.120 (3.0)
968 (with PC Pins)	.400 (10.2)
68 (without PC Pins)	-

Mounting Detail



9 VOLT BATTERY RETAINER

- Holds battery securely in place
- Positions anywhere for easy access to battery
- Clearance on end for 9 Volt battery strap



CAT. NO. 239

MATERIAL: Polypropylene

PROTECTIVE BATTERY CAP

- Protects 9 Volt batteries and battery packs when they are not in use
- Snap-fits onto battery contacts
- Protects the battery contacts from damage due to dust, dirt and contamination

MATERIAL:

Impact Resistant Polypropylene, Black

CAT. NO. 96

