


4 × 4 Ceramic SMD Type multicom^{PRO}

RoHS
Compliant

Package Dimensions:

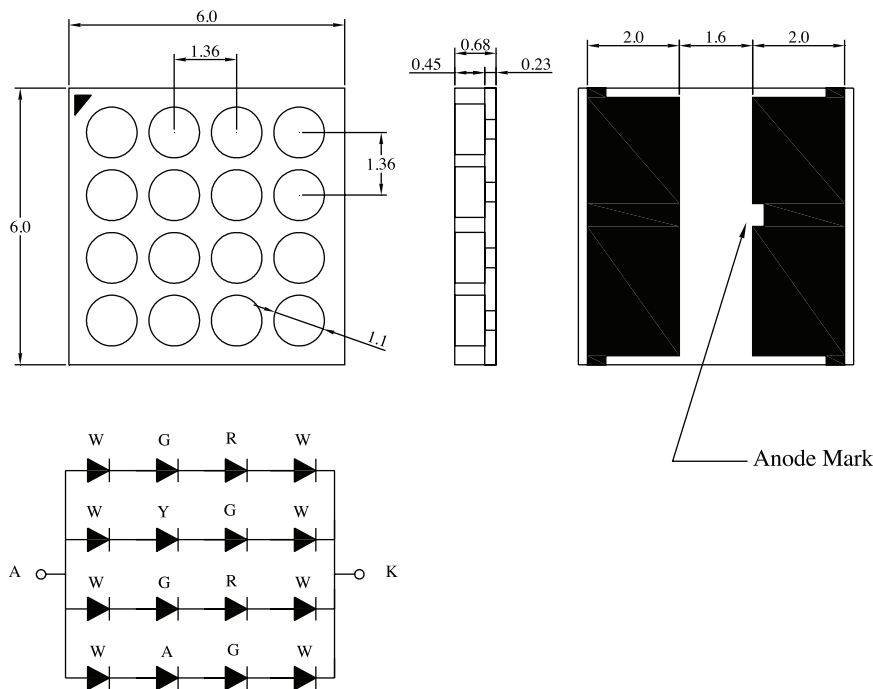

All dimensions are in mm
Tolerance: ± 0.25 mm

Absolute Maximum Ratings at $T_a=25^{\circ}\text{C}$

Parameter			Rating	Unit
Power Dissipation*	White & Green	Pd	120	mW
	Red & Yellow		78	
	Amber		72	
Reverse Voltage*		VR	5	V
D.C. Forward Current*		If	350	mA
Pulsed Forward Current ($t_p \leq 100\mu\text{s}$, Duty Cycle = 0.005×1)*		If (Peak)	100	mA
Operating Temperature Range		Topr.	-40 to +100	$^{\circ}\text{C}$
Storage Temperature Range		Tstg.	-40 to +100	$^{\circ}\text{C}$
Soldering Temperature		Tsld.	Reflow Soldering: 260°C for 10sec.	
Electric Static Discharge (HBM)		ESD	300	V

4 × 4 Ceramic SMD Type multicom^{PRO}

Electrical & Optical Characteristics

Parameter	Symbol	Condition	Values			Unit
			Min.	Typ.	Max.	
Luminous Flux	Φ_v	If=80mA	10.7	17.3		lm
Forward Voltage	Vf	If=80mA		11.5	15	V
Correlated Colour Temperature	A	CCT	If=80mA	2,800	3,000	K
	B			3,000	32,000	
Colour rendering Index	CRI	If=80mA		94		Ra
Reverse Current*	Ir	Vr=5V			50	μ A
Viewing Angle	2 θ ½	If=80mA		120		deg

Notes : 1. The data is tested by an IS tester.
2. Customer's special requirements are also welcome.
3. * The values are based on 1 die performance.

Typical Electrical & Optical Characteristics Curves:

(25°C Ambient temperature unless otherwise noted)



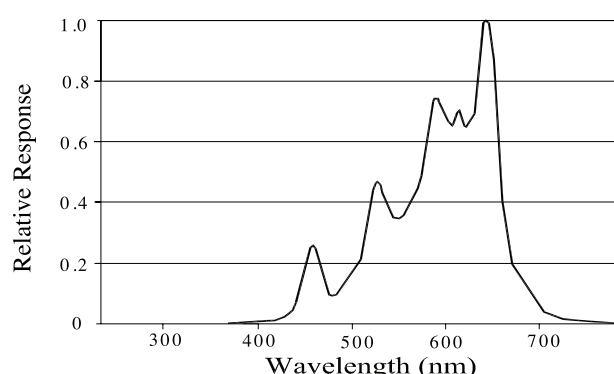


Fig.1 WHITE LED Spectrum VS. WAVELENGTH


4 × 4 Ceramic SMD Type multicom^{PRO}

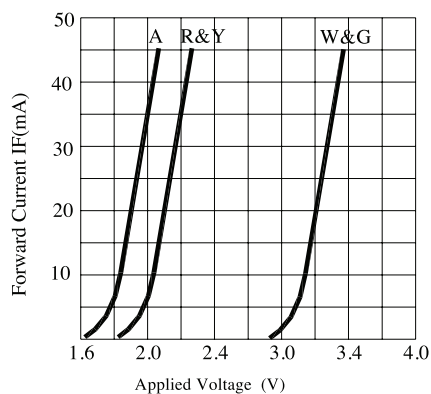


Forward Current VS. Applied Voltage

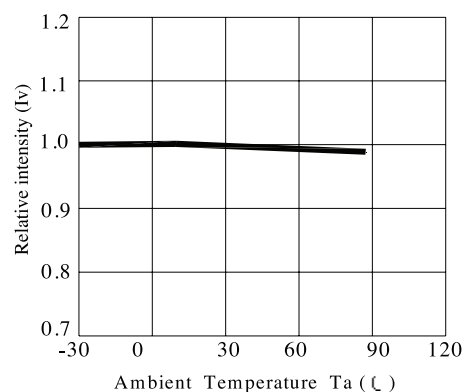

Forward Current VS. Luminous Intensity

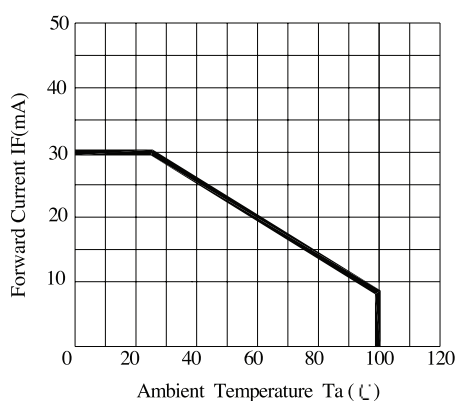

Ambient Temperature VS. Forward Current

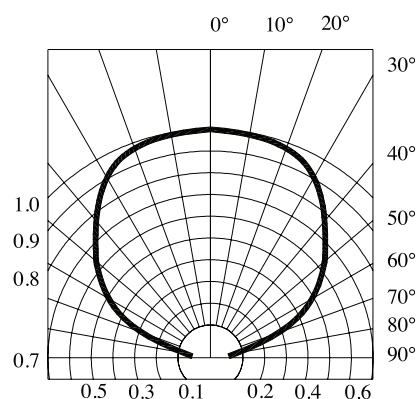

Radiation Diagram

Recommended Storage Environment:

- Temperature: 5°C ~ 30°C (41°F ~ 86°F)
- Humidity: 60% RH Max.
- Use within 7 days after opening of sealed vapour/ESD barrier bags.
- If moisture absorbent material (silica gel) has faded away or LEDs have exceeded the storage time, baking treatment should be performed using the following conditions:
- Baking Treatment: 60 ± 5°C for 24 hours
- Fold the opened bag firmly and keep in dry environment.

4 × 4 Ceramic SMD Type multicomp^{PRO}

Soldering


Reflow Soldering				
	Lead Solder	Lead-free Solder		
Pre-heat	120 ~ 150°C	180 ~ 200°C	Temperature	350°C max.
Pre-heat Time	120sec. max.	120sec. max.	Soldering time	3sec max. (one time only)
Peak Temperature	240°C max.	260°C max.		
Soldering Time	10sec. max.	10sec. max.		
Condition	Refer to temperature-profile 1	Refer to temperature-profile 2		

*After reflow soldering rapid cooling should be avoided.


Temperature-profile (surface of circuit board):

Use the conditions shown under figure.

< 1 : Lead Solder >

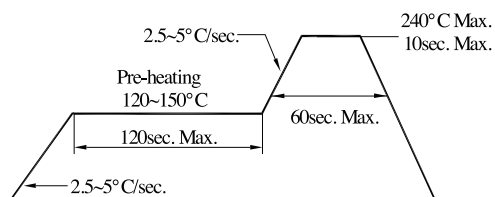


< 2 : Lead-free Solder >

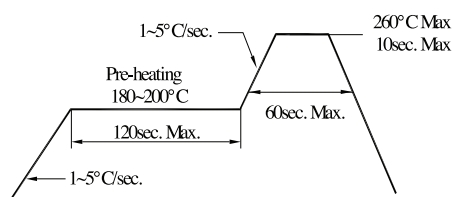

Recommended Soldering Pad Design:

Use the following conditions shown in figure.



Part Number Table

LED Chip		Lens Colour	Part Number
Material	Emitting Colour		
InGaN/Metal Alloy	White	Water clear	703-0153

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicompro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicompro
Farnell.com/multicompro
sg.element14.com/b/multicompro

multicompro